



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

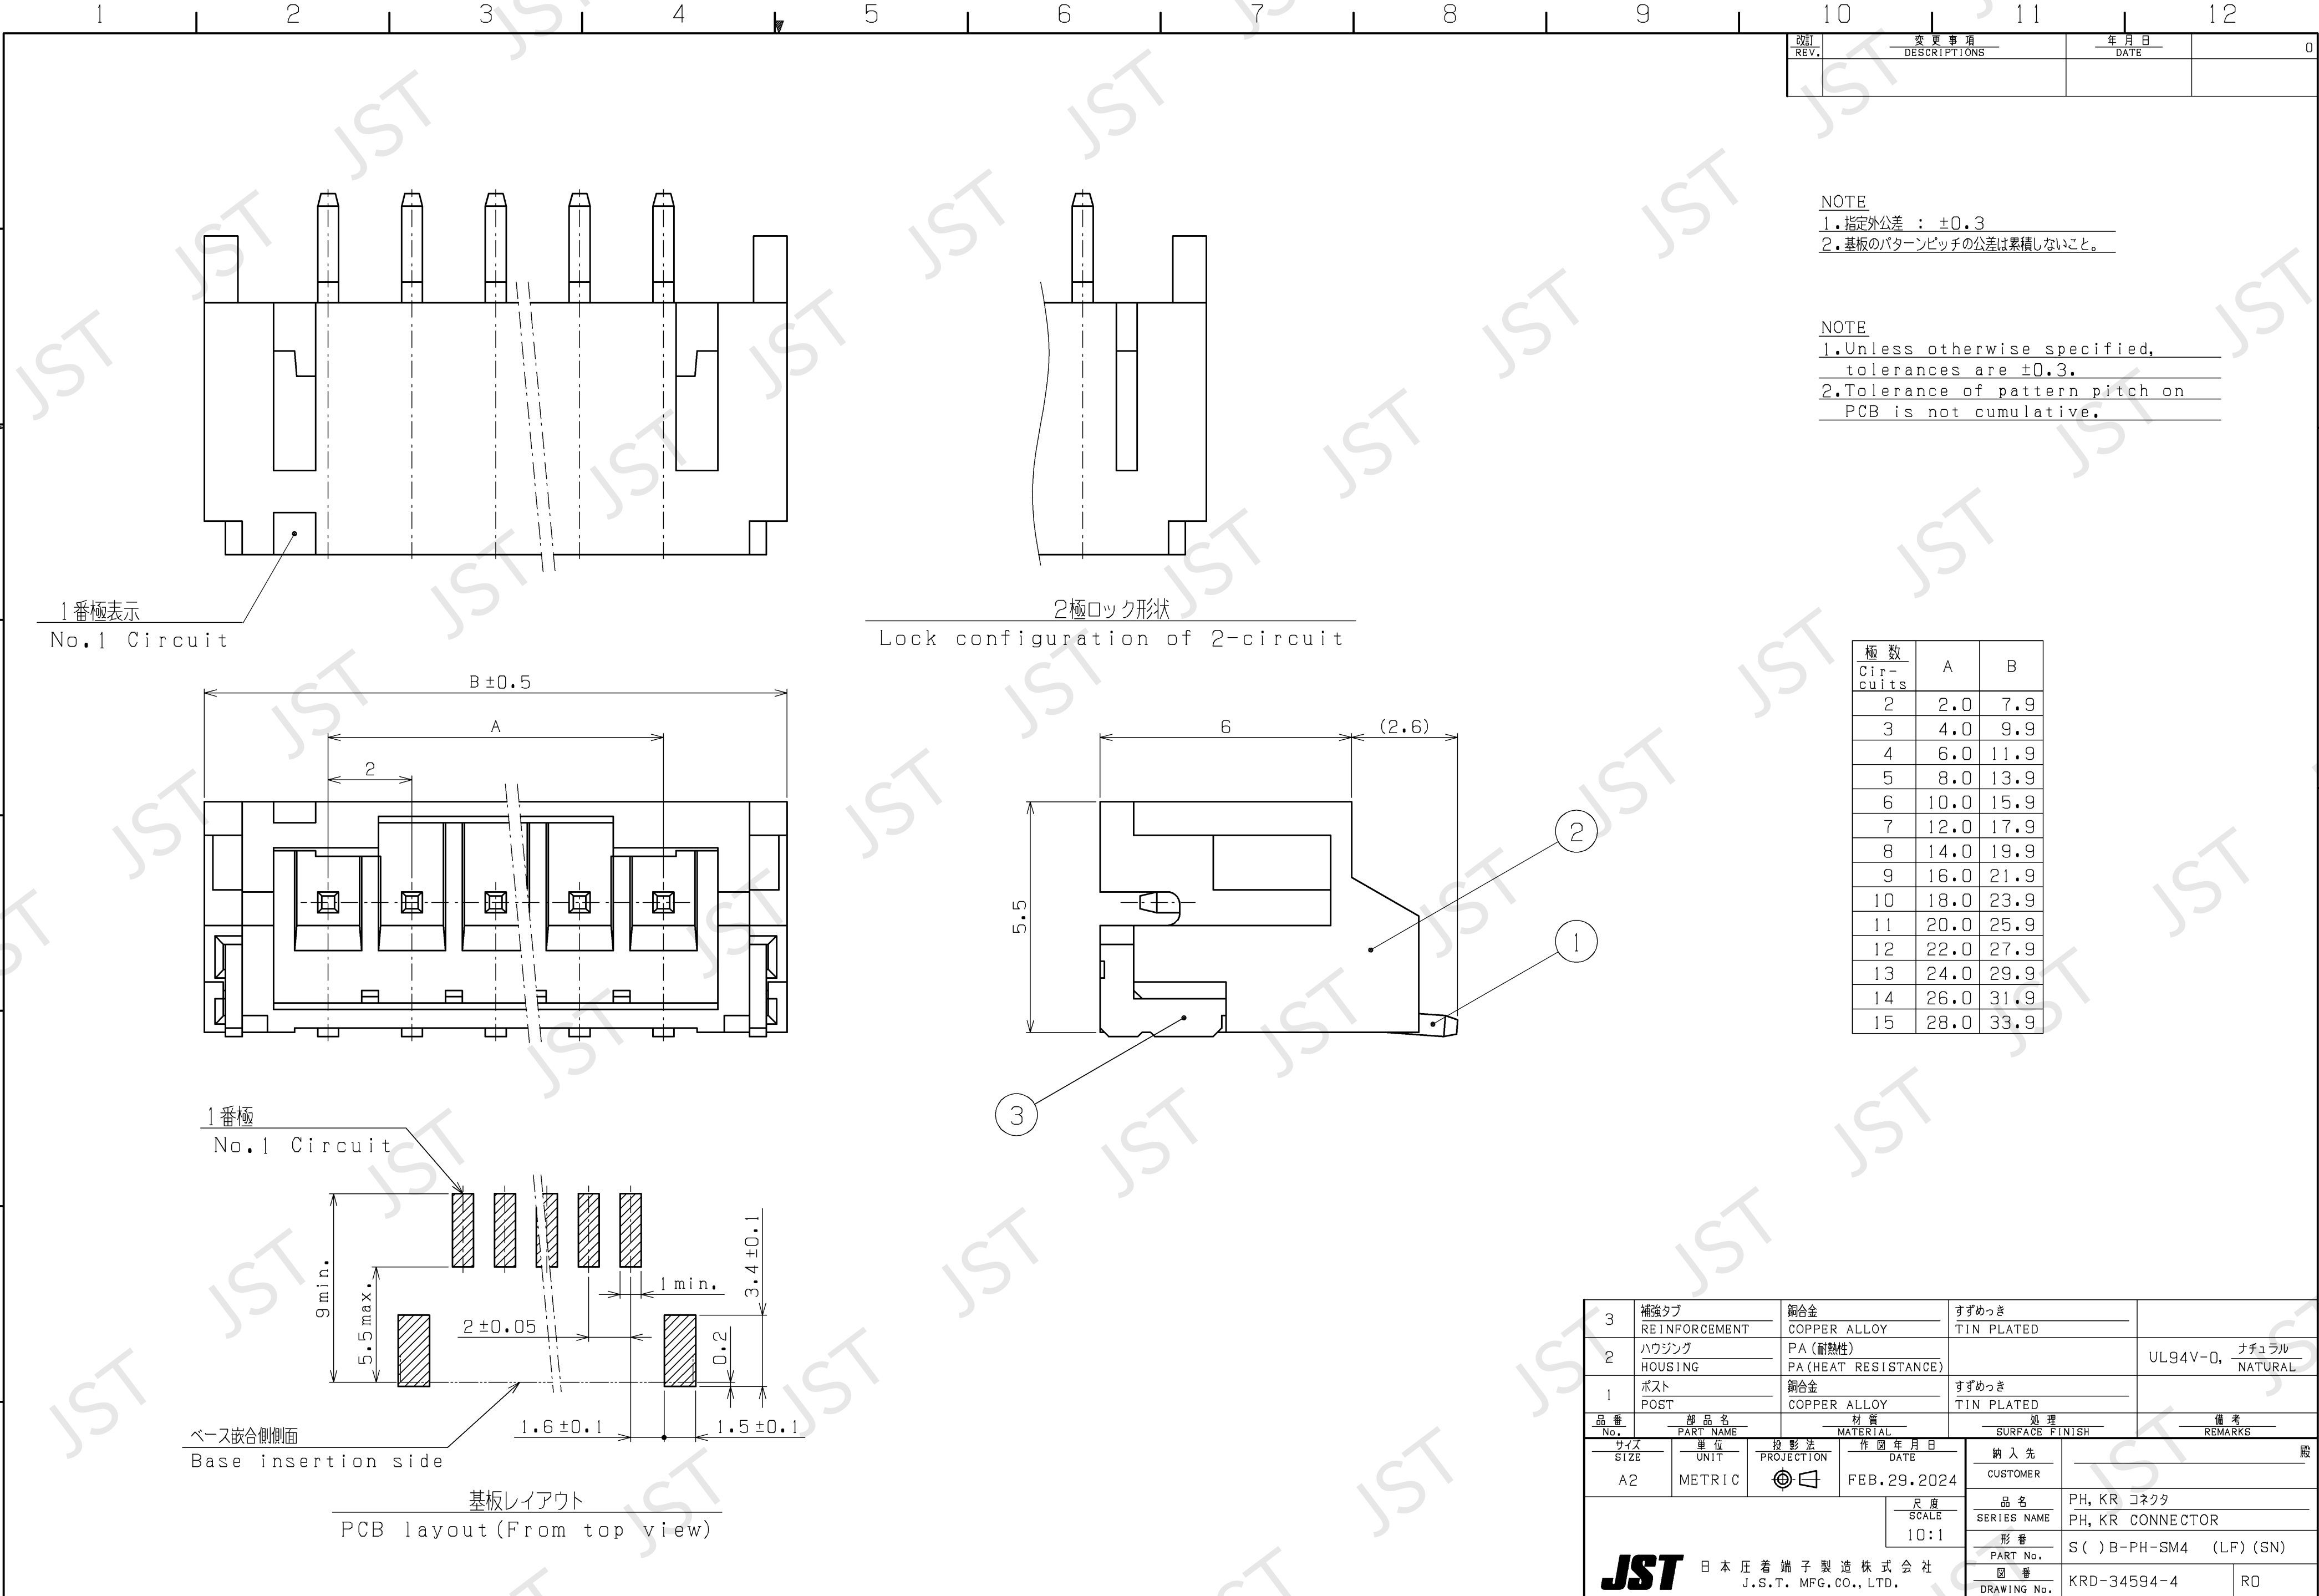


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

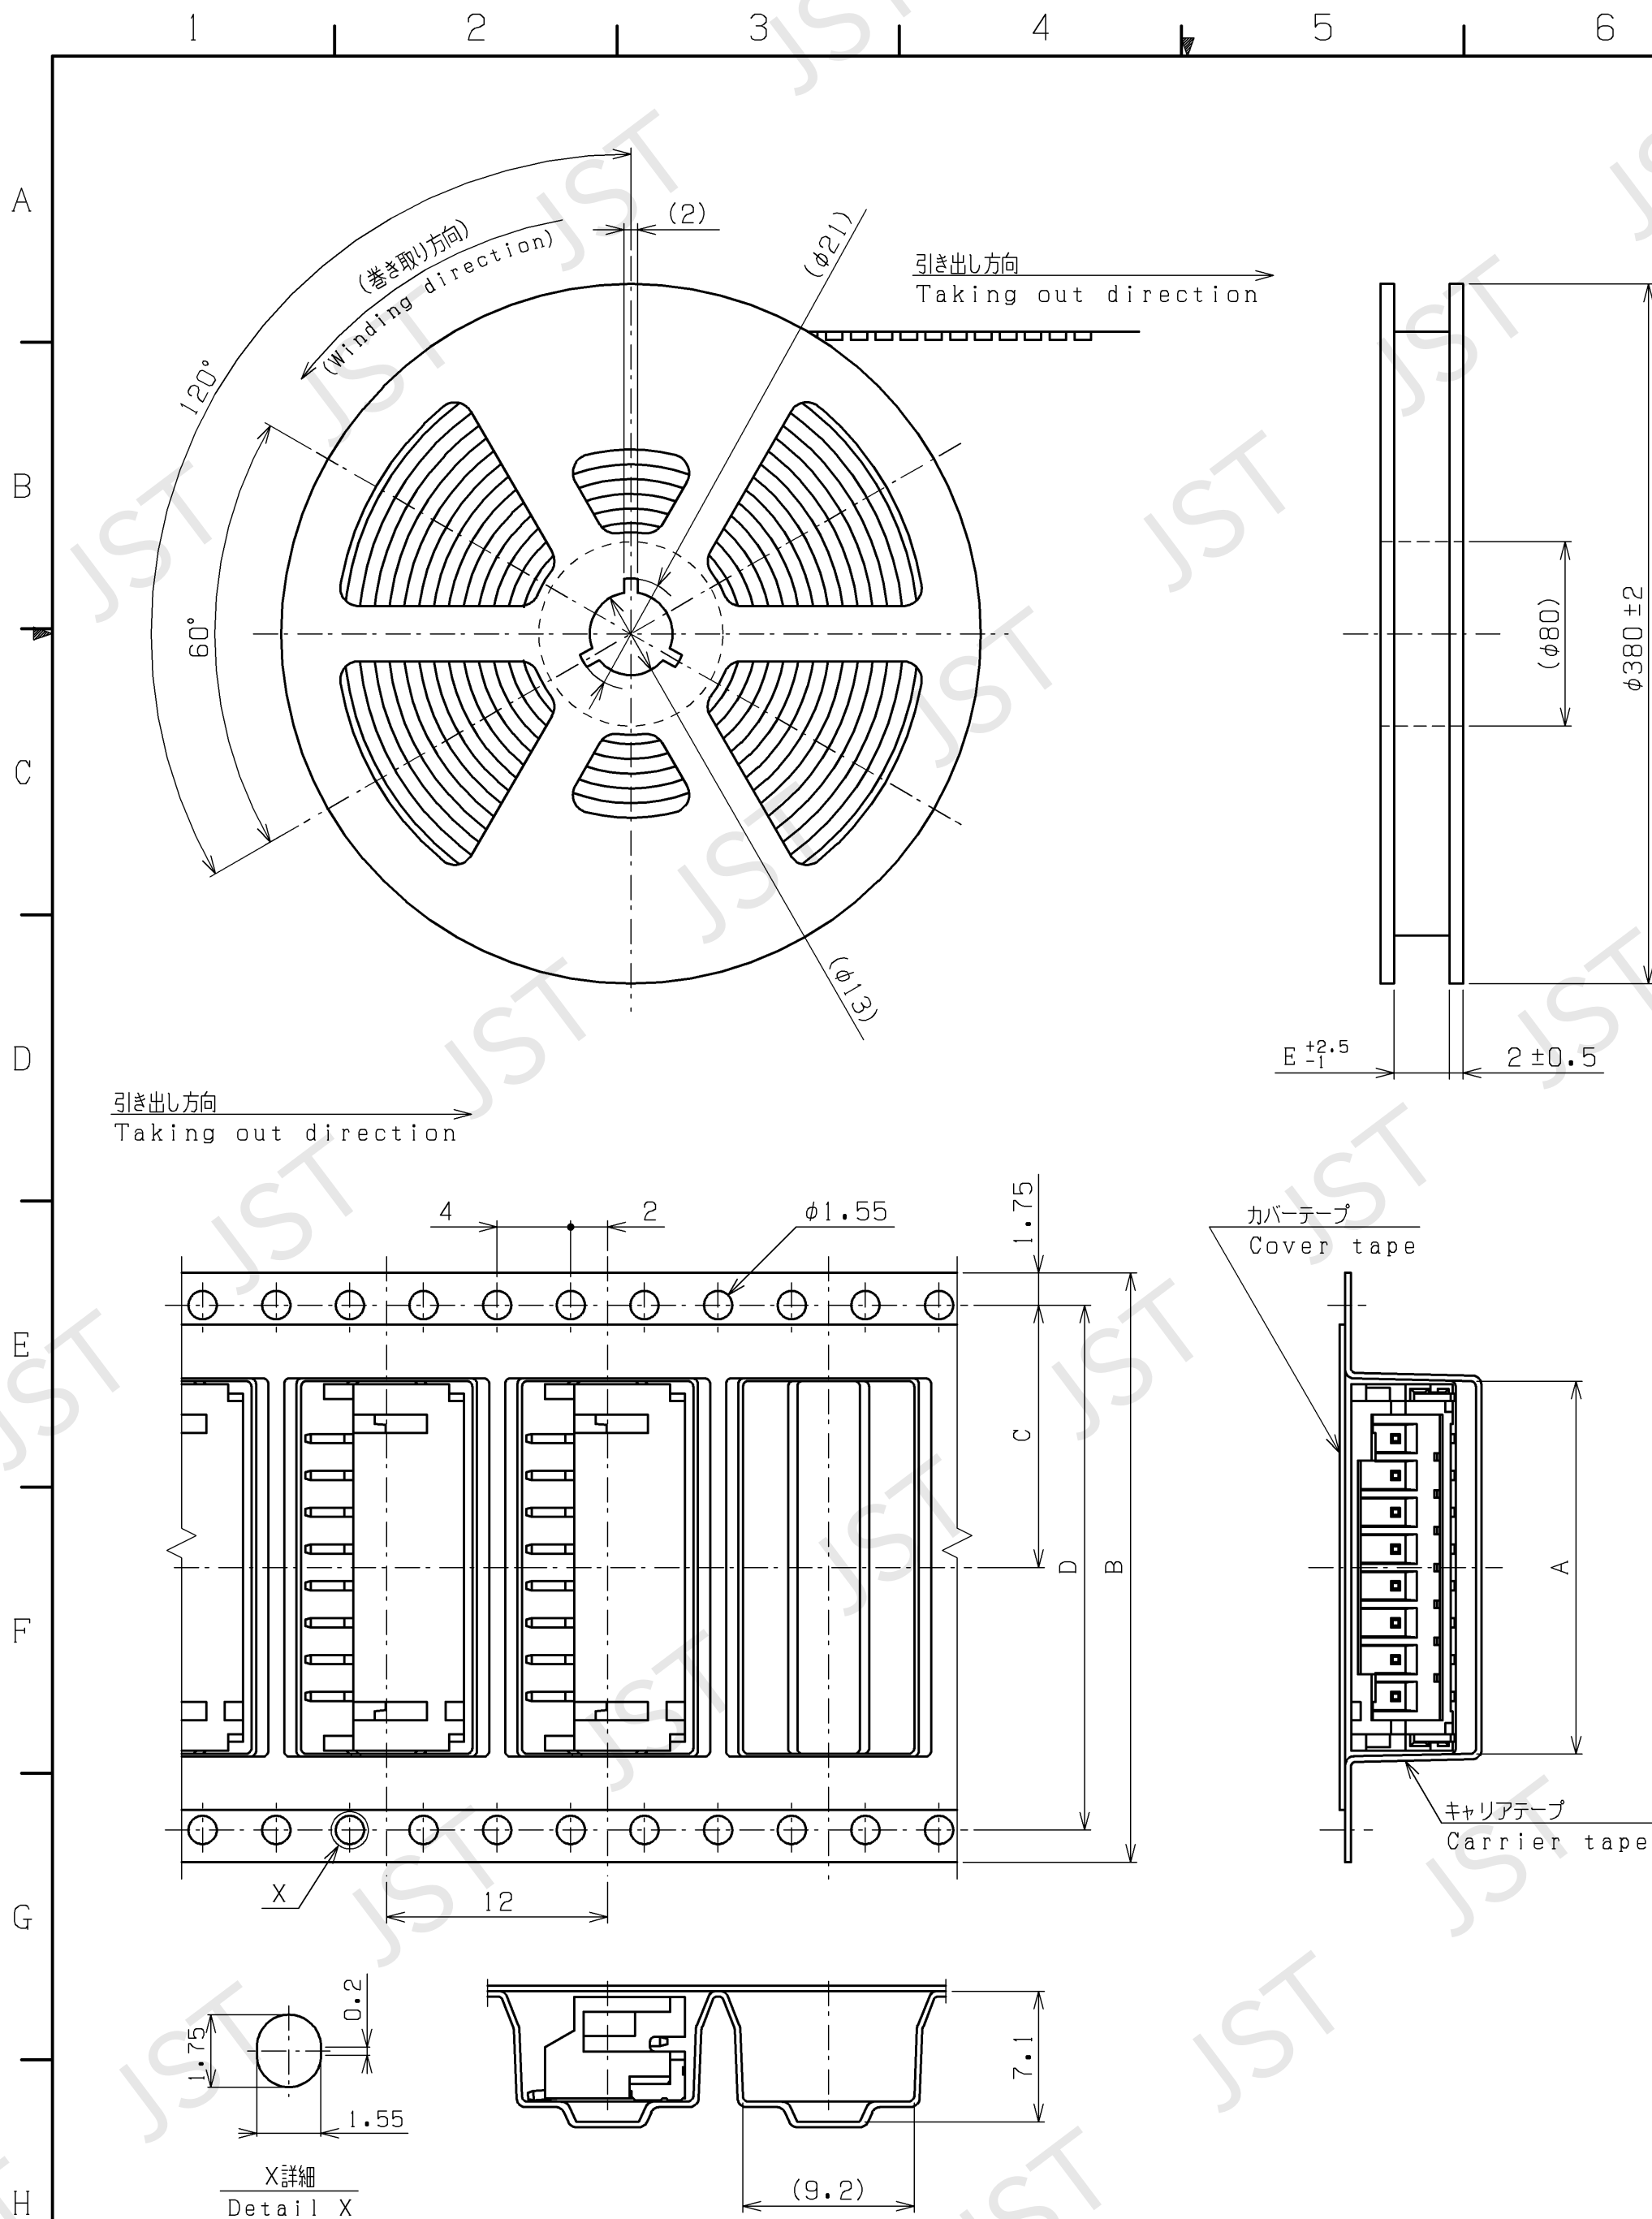


NOTE

- 1.コネクタ本体については、単体の別図面を参照ください。
- 2.梱包数量：1000個/リール。
- 3.リードテープ長さ

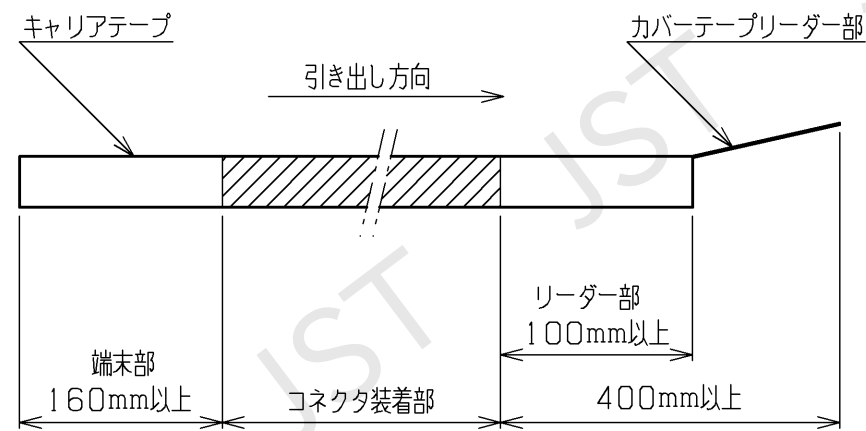


4.カバーテープの剥離強度：0.1~1N (速度300mm/分)

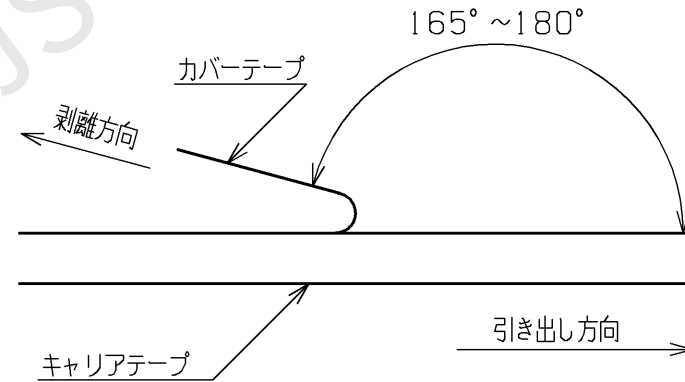


- 5.材料：キャリアテープ：ポリエステル (PET)
ポリスチレン (PS)
カバーテープ：ポリエステル (PET)
リール：フランジ部-ポリスチレン (PS)
コア部-ポリプロピレン (PP)
ポリスチレン (PS)
- 6.指定公差：±0.3

NOTE

- 1.Connector part:See the DWR. of PH connector.
- 2.Quantity to be packaged:1000pcs/reel
- 3.Leading tape length.

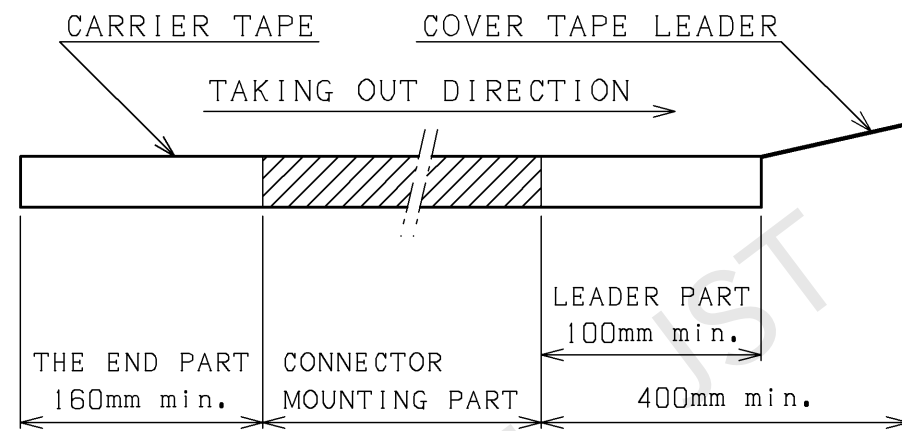

4.Cover tape peeling strength:0.1~1N (Peel speed:300mm/minute)

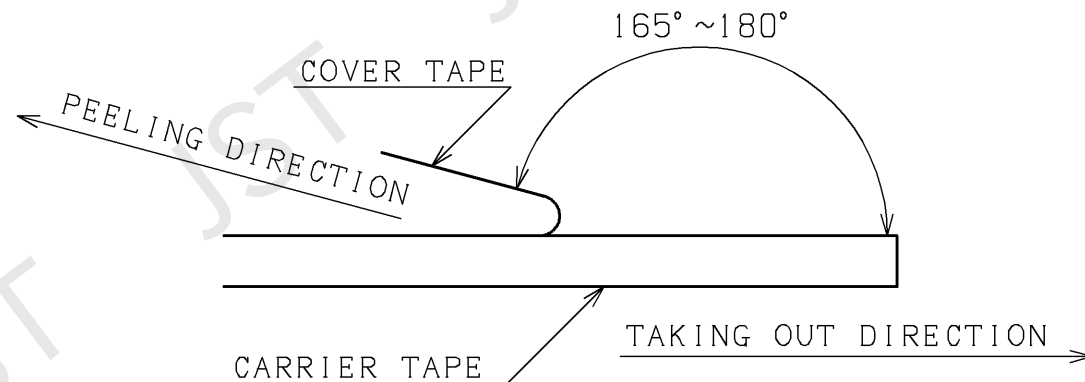

- 5.Material:Carrier tape;Polyester (PET)
Polystyrene (PS)
Cover tape ;Polyester (PET)
Reel ;Flange;Polystyrene (PS)
Core ;Polypropyrene (PP)
Polystyrene (PS)
- 6.Unless otherwise specified, tolerances are ±0.3

極数 Circuits	寸法/Dimensions				
	A	B	C	D	E
7	18.25	32.0	14.2	28.4	33.5
8	20.25	32.0	14.2	28.4	33.5
9	22.25	32.0	14.2	28.4	33.5
10	24.25	44.0	20.2	40.4	45.5
11	26.25	44.0	20.2	40.4	45.5
12	28.25	44.0	20.2	40.4	45.5
13	30.25	44.0	20.2	40.4	45.5
14	32.25	44.0	20.2	40.4	45.5
15	34.25	56.0	26.2	52.4	57.5

品番 No.		部品名 PART NAME		材質 MATERIAL		処理 SURFACE FINISH		備考 REMARKS	
サイズ SIZE		単位 UNIT		投影法 PROJECTION		作図年月日 DATE		納入先 CUSTOMER	
A2		METRIC		3:1		MAR. 8, 2024		品名 SERIES NAME	
								PH コネクタ エンボスターピング品 PH CONNECTOR EMBOSSED-TAPING	
								形番 PART No.	
								S () B-PH-SM4-TB (LF) (SN)	
								図番 DRAWING No.	
								KRD-38104-1	
								RO	