


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

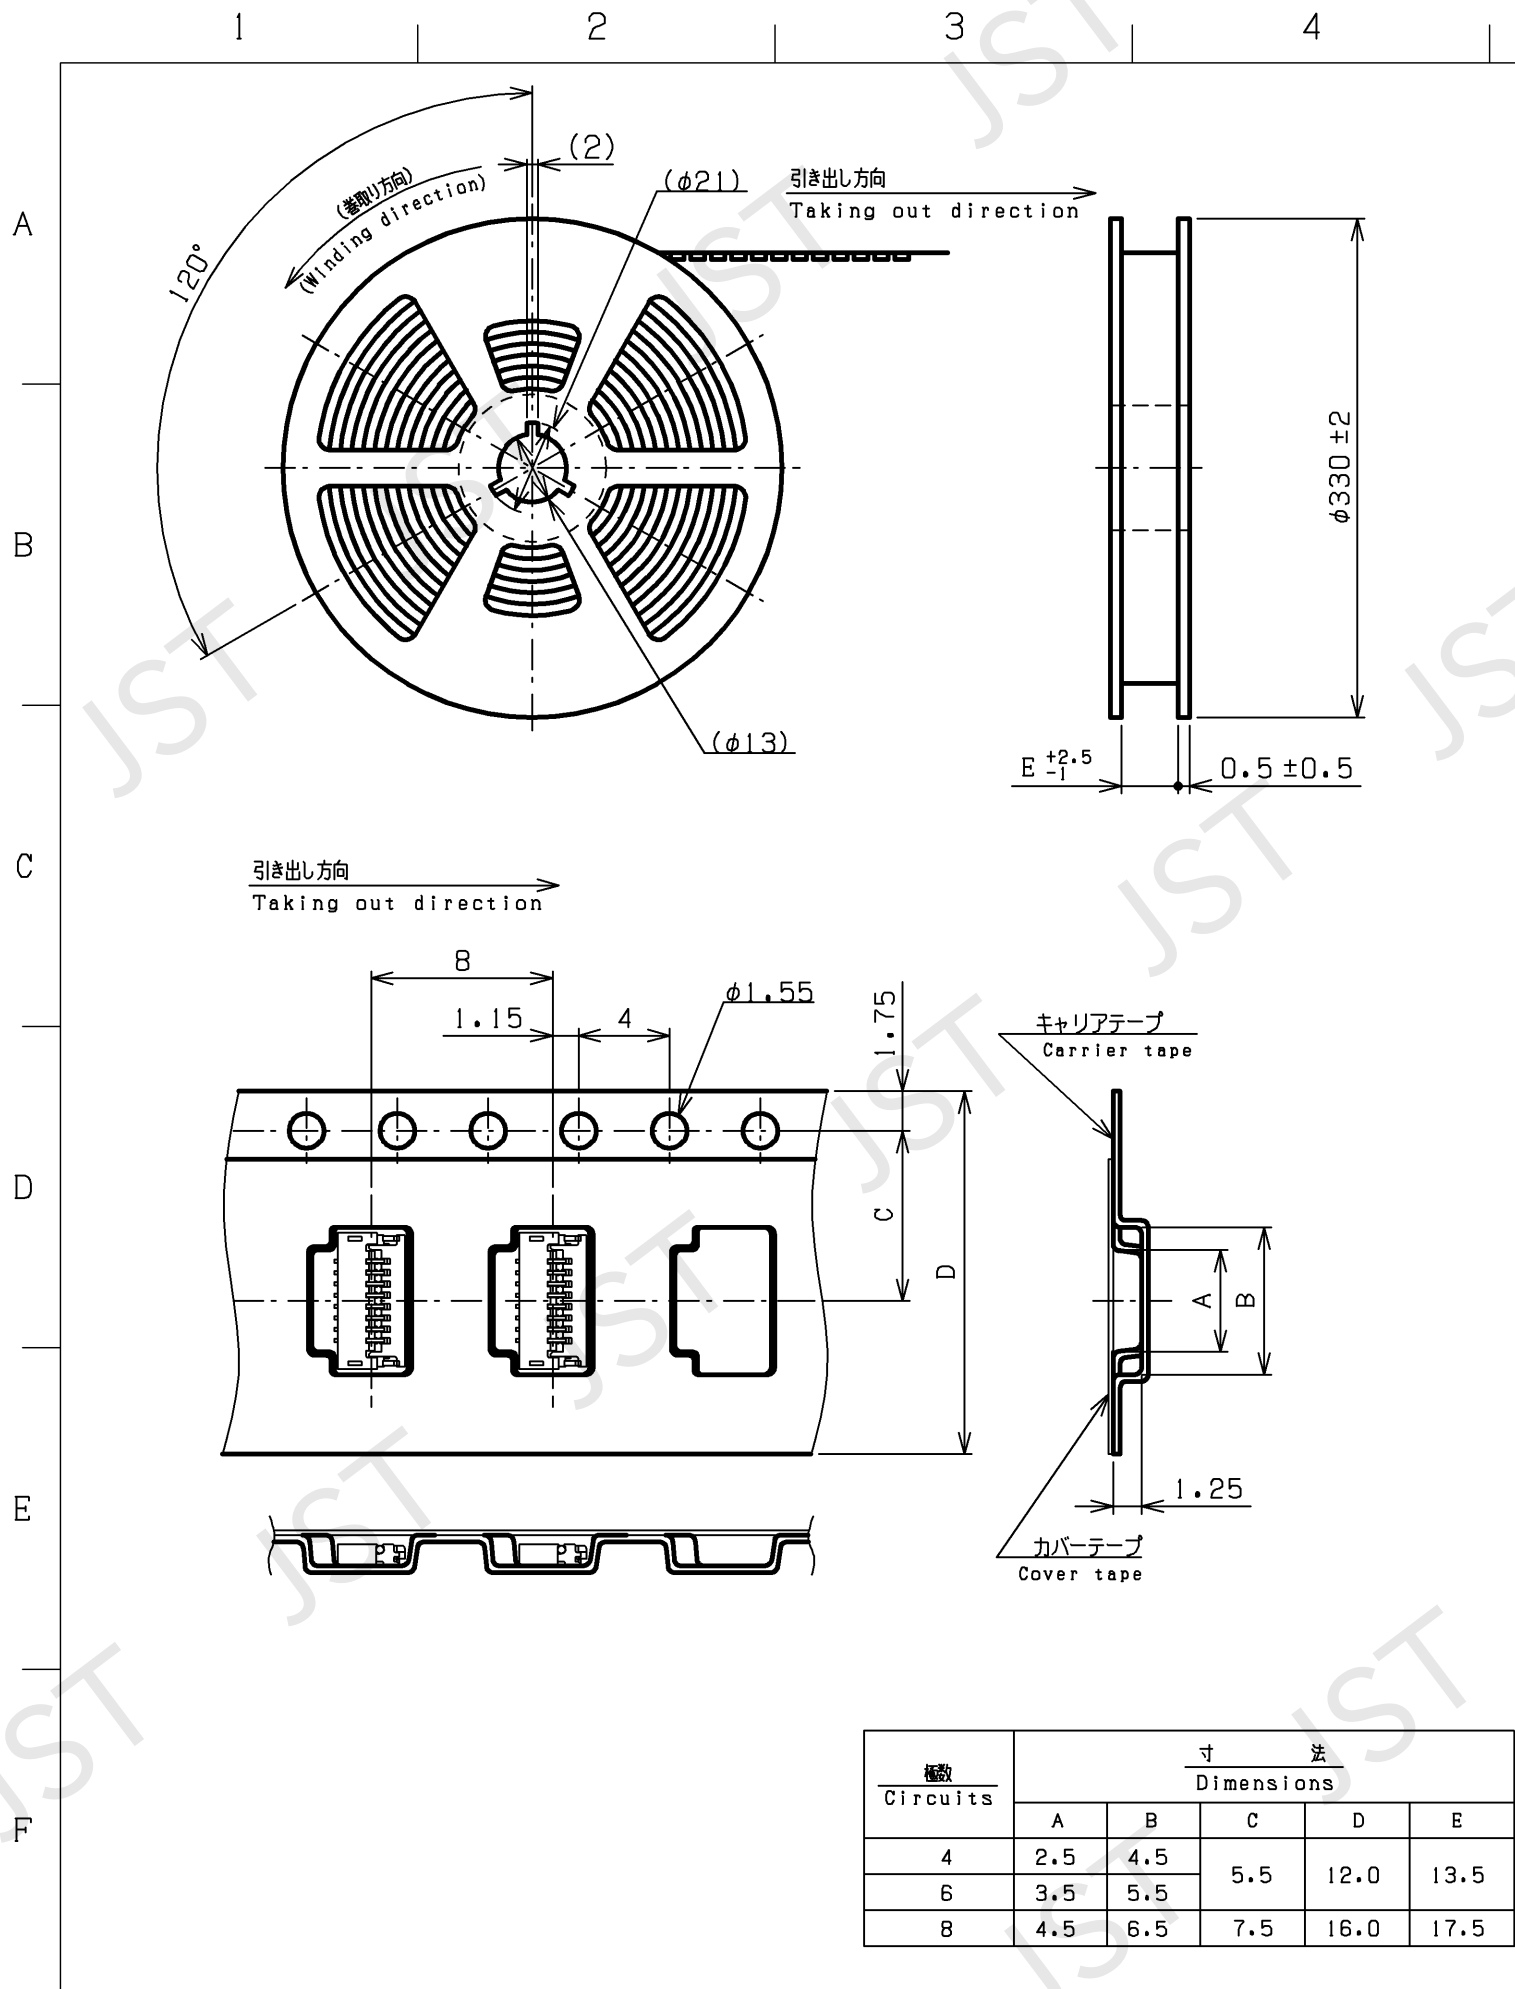

改訂 REV.	変 更 事 項 DESCRIPTIONS	年 月 日 DATE	0
△			

NOTE

1) コネクタ本体については、単体の別図面を参照ください。
2) 梱包数量: 6,000個/リール
3) リードテープ長さ

NOTE

1) Connector part: See the DWG.
2) Quantity to be packaged: 6,000pcs/reel.
3) Leading tape length.

CARRIER TAPE

TAKING OUT DIRECTION

COVER TAPE LEADER

THE END PART 160mm MIN

CONNECTOR MOUNTING PART

LEADER PART 100mm MIN

400mm MIN

4) カバーテープの剥離強度: 0.1~1.3N (剥離速度 300mm/分)

Peeling speed: 300mm/minute.


5) Material: Carrier tape: Polyester (PET) or Polystyrene (PS)
Cover tape: Polyester (PET)
Reel; Flange: Polystyrene (PS)
Core: Polypropylene (PP) Polystyrene (PS)

6) Unless otherwise specified, tolerances are ±0.3

1	品 番 No.	PART NAME	材 質 MATERIAL	処 理 SURFACE FINISH	備 考 REMARKS
サイズ SIZE	A3	単 位 UNIT	投 影 法 PROJECTION	作 図 年 月 日 DATE	尺 度 SCALE
		METRIC	⊕ □	AUG. 28. 2024	FREE
				納 入 先 CUSTOMER	殿
				品 名 SERIES NAME	FHSコネクタ エンボステーピング品
				形 番 PART No.	FHS CONNECTOR EMBOSSED TAPING
				図 番 DRAWING No.	() FHS-RSM1-GAN-TB (LF) (SN)
					KRD-31753-5
					R0

JST 日本圧着端子製造株式会社
J.S.T. MFG.CO.,LTD.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

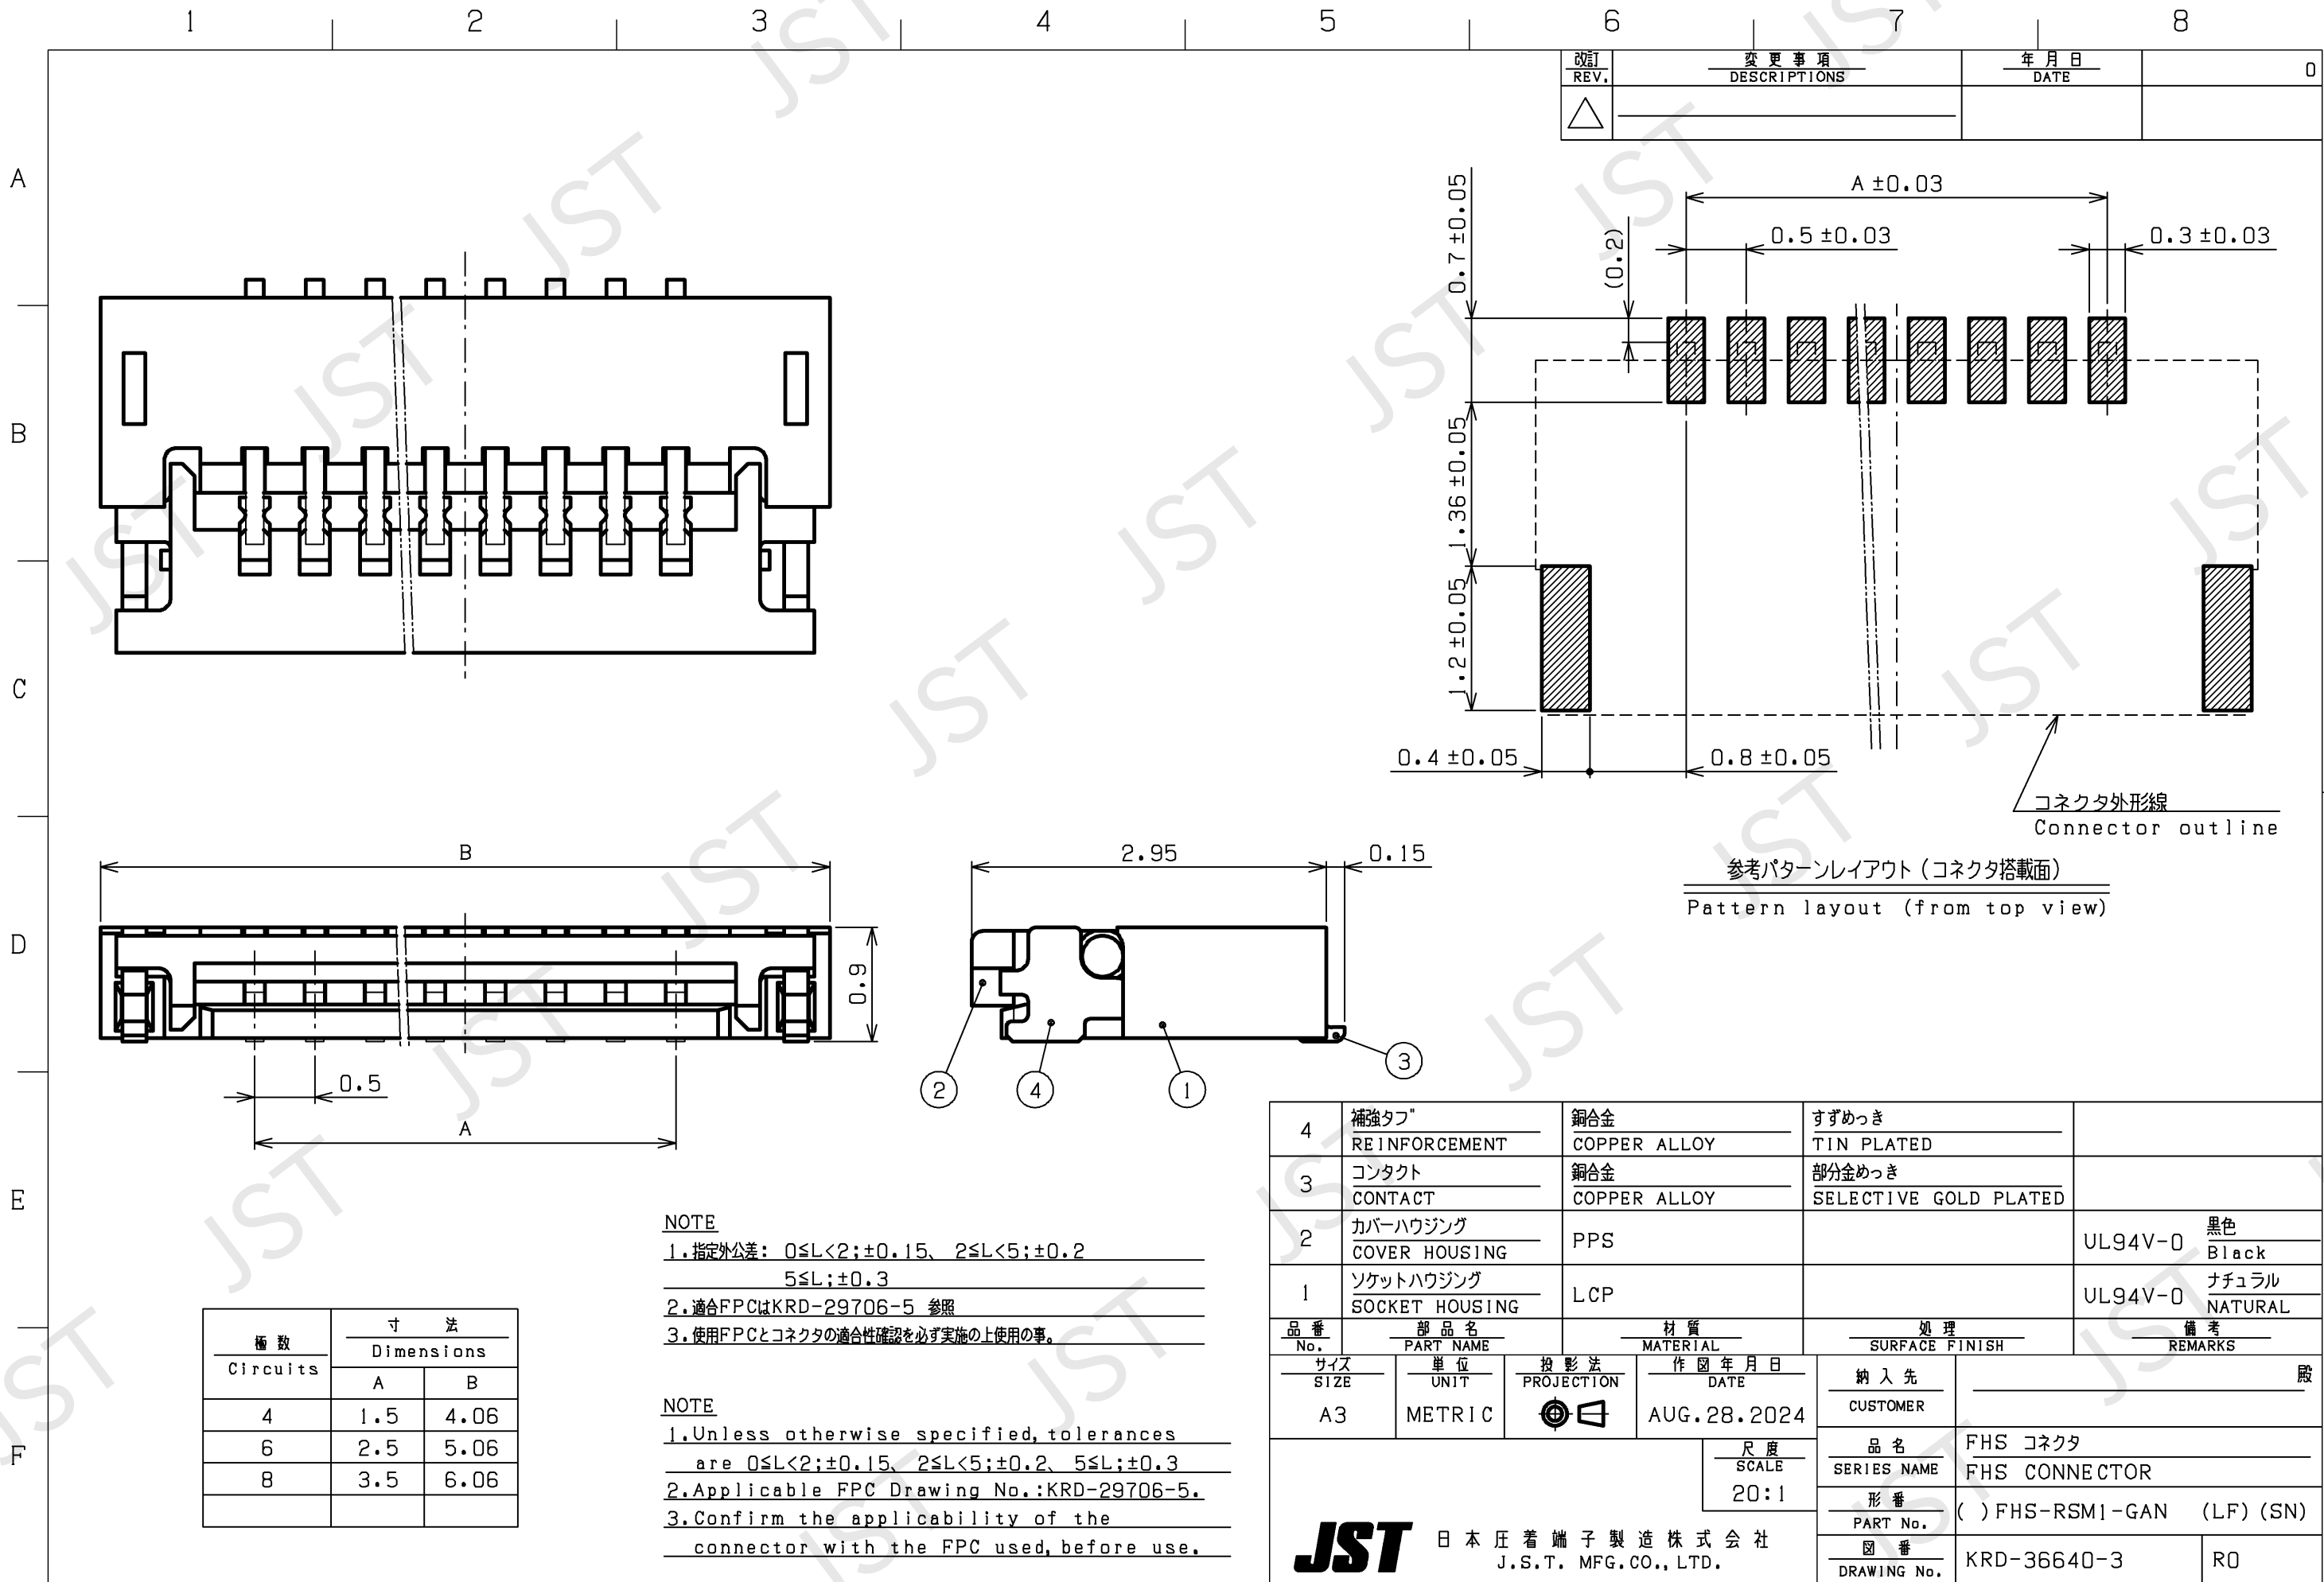

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

