
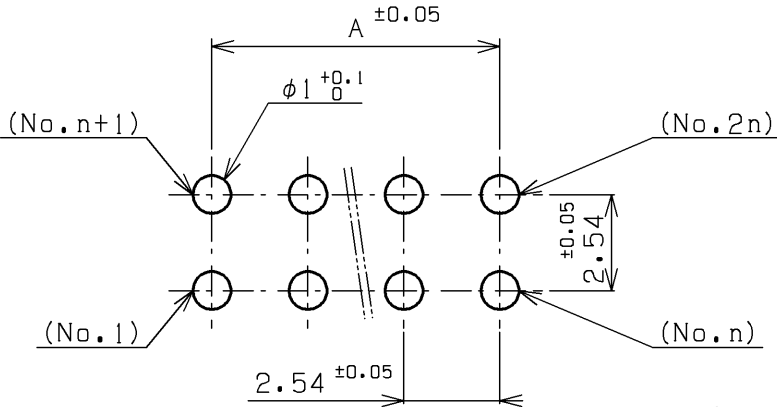
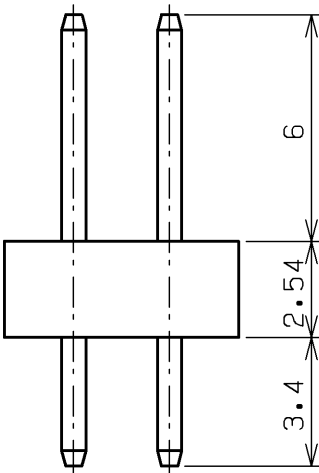
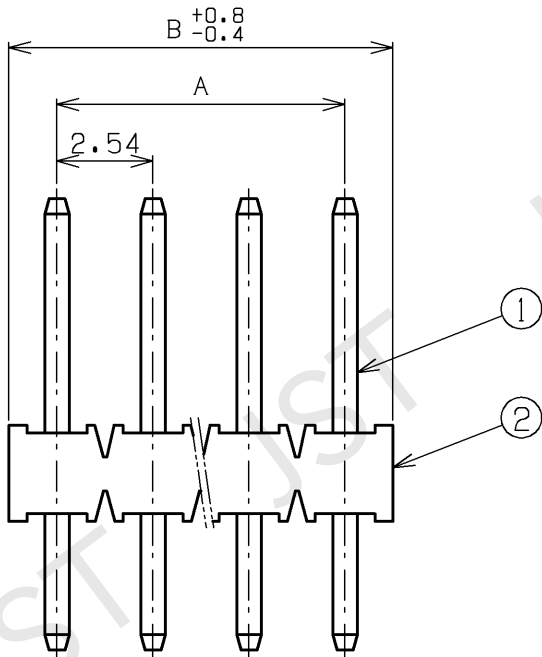


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

12345678

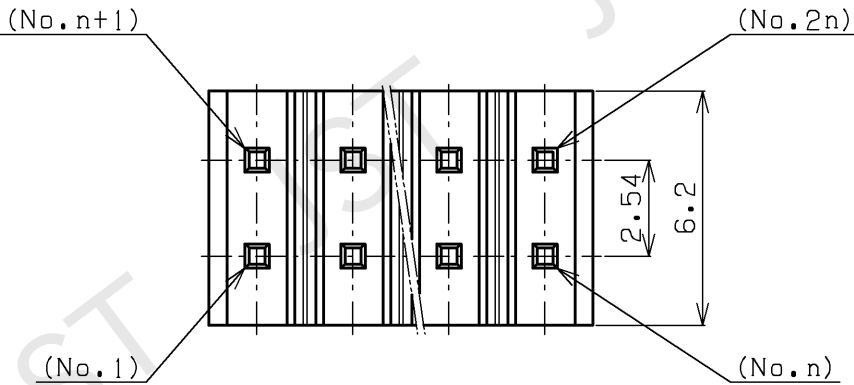

推奨基板レイアウト
Recommendable P.C.Board layout

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

NOTE
1. 指定外公差 : ±0.3

NOTE
1. Unless otherwise specified,
tolerances are ±0.3

極数 Cir- cuits	A	B	極数 Cir- cuits	A	B
2	0	2.54			
4	2.54	5.08	34	40.64	43.18
6	5.08	7.62			
8	7.62	10.16			
10	10.16	12.70	40	48.26	50.80
12	12.70	15.24			
14	15.24	17.78			
16	17.78	20.32			
20	22.86	25.40			
26	30.48	33.02			
28	33.02	35.56			
			60	73.66	76.20

2	ベースハウジング BASE HOUSING	PBT (GF強化) PBT (GF)		UL94V-0, 黒 BLACK
1	ポスト POST	銅合金 COPPER ALLOY	金めっき GOLD PLATED	
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		JUN. 4.2024	
日本圧着端子製造株式会社 J.S.T.MFG.CO., LTD.				品名 SERIES NAME
				RF コネクタ RF CONNECTOR
				形番 PART No.
				RF-H () 2TD-1130
				図番 DRAWING No.
				KRD-08663-4 R0