

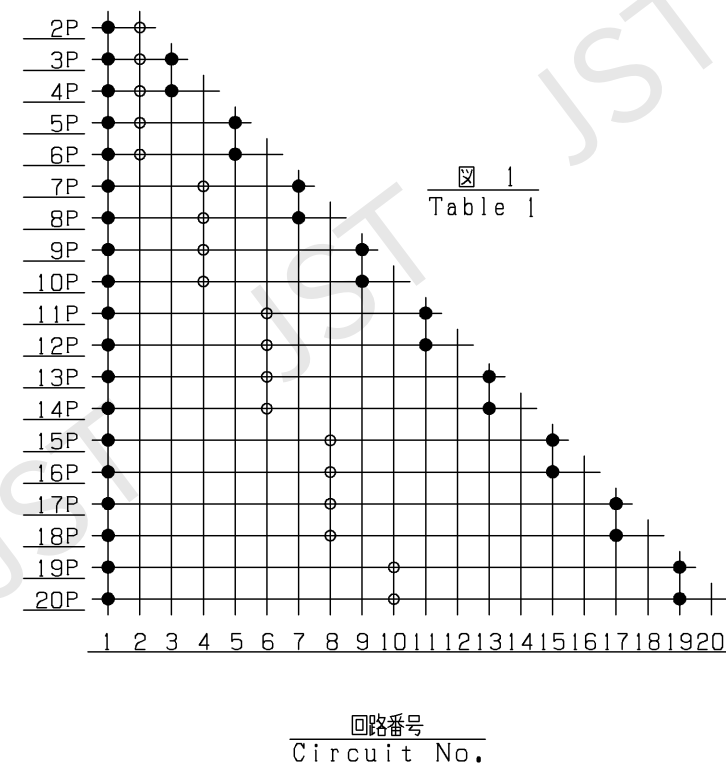
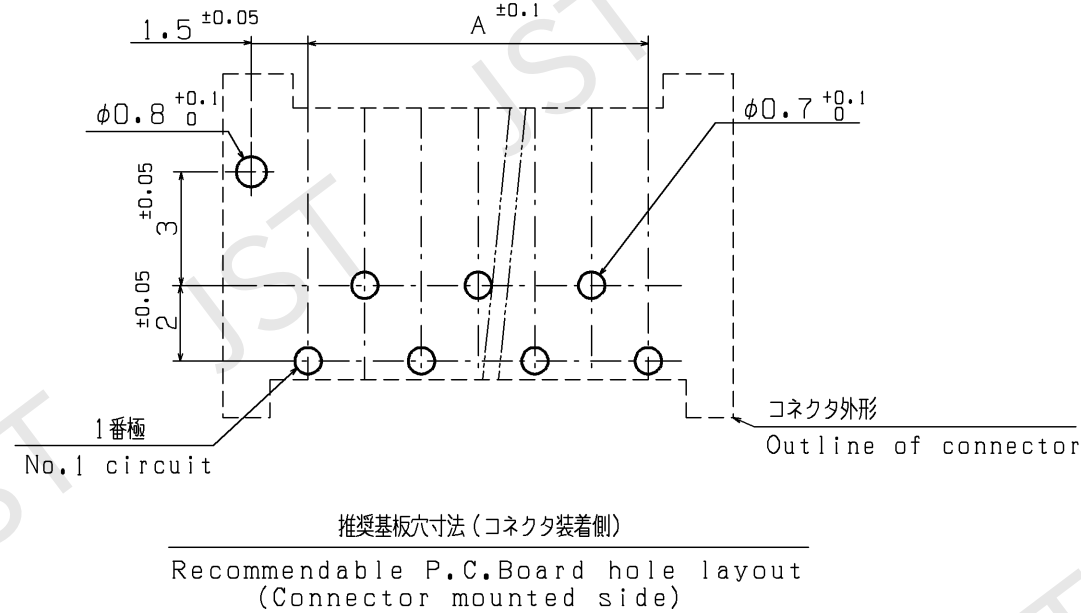
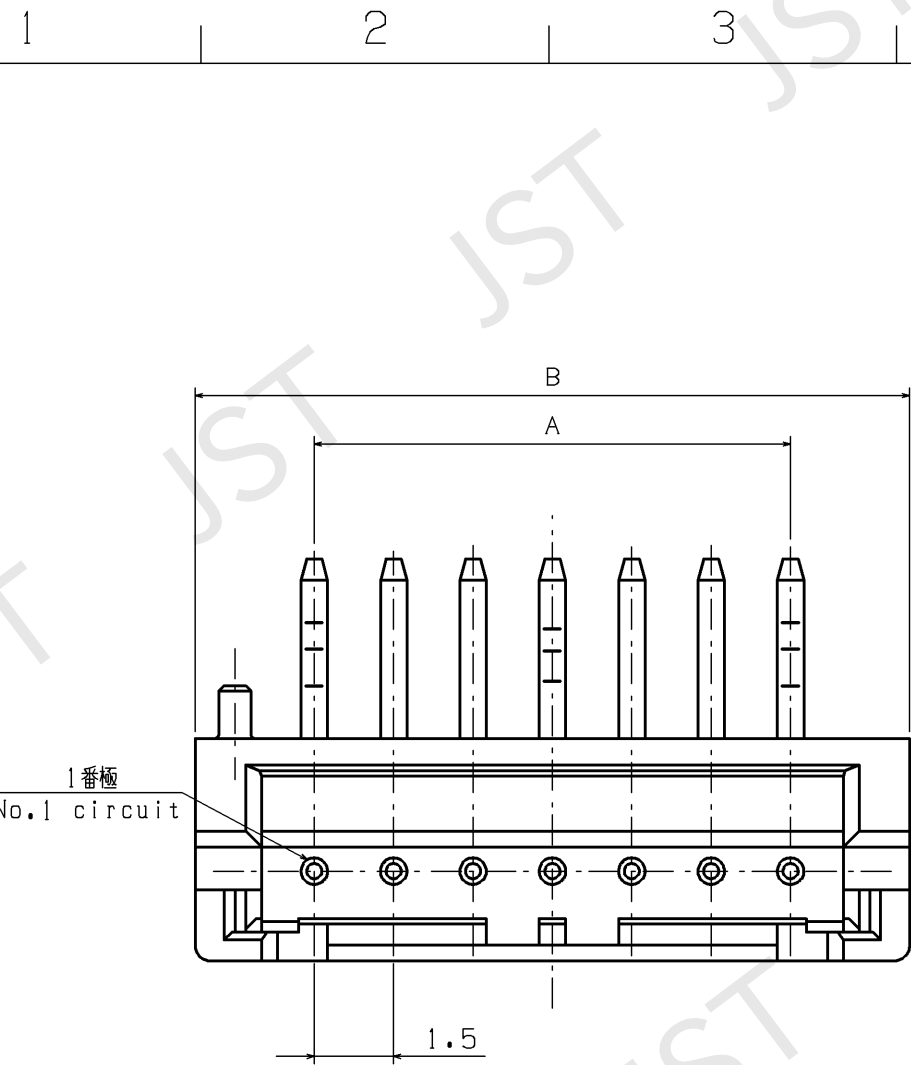


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

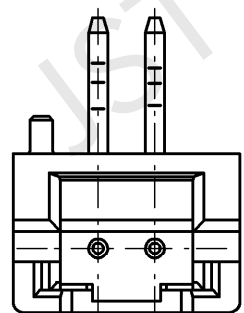


- NOTE
1. 指定公差 $0 < L \leq 3.0 : \pm 0.3$
 $3.0 < L : \pm 0.4$
 2. 形番 : S () B-CZHK-B-1 (LF) (SN)
 3. 図1に示す●のピンをキンク加工し、○は●と逆方向のキンクを設ける。
- NOTE
1. Unless otherwise specified, tolerances are: $0 < L \leq 3.0 : \pm 0.3$
 $3.0 < L : \pm 0.4$
 2. Part No.: S () B-CZHK-B-1 (LF) (SN)
 3. ● and ○ specified in table 1 shall be kink direction of ○ the other side of ●.

極数 Circuits	寸 法 Dimensions	
	A	B
2	1.5	6.0
3	3.0	7.5
4	4.5	9.0
5	6.0	10.5
6	7.5	12.0
7	9.0	13.5
8	10.5	15.0
9	12.0	16.5
10	13.5	18.0
11	15.0	19.5
12	16.5	21.0
13	18.0	22.5
14	19.5	24.0
15	21.0	25.5
16	22.5	27.0
17	24.0	28.5
18	25.5	30.0
19	27.0	31.5
20	28.5	33.0

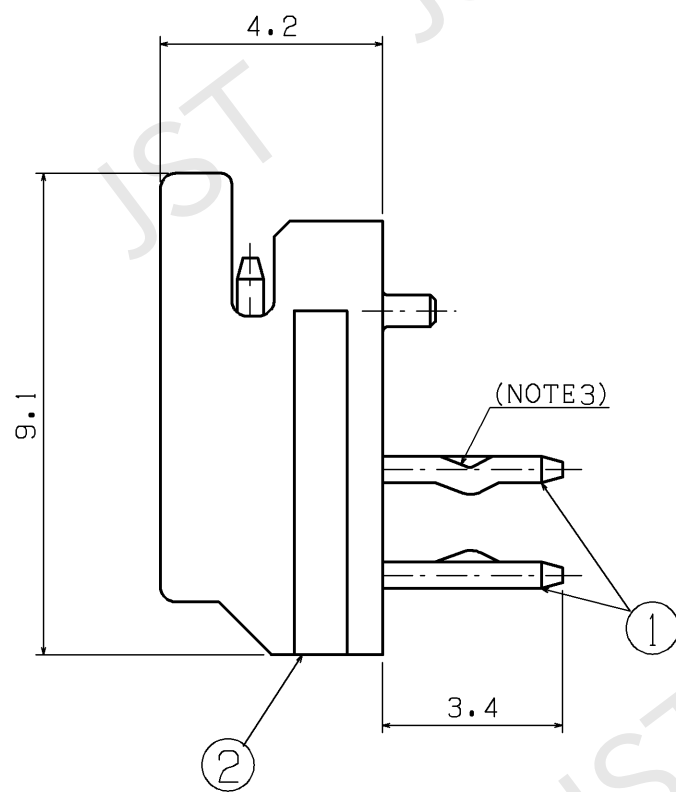

2極形状
Configuration of 2-circuit

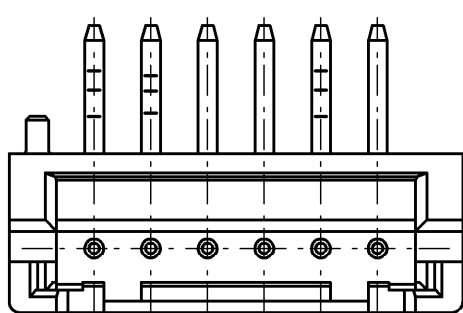

3~6極形状
Configuration of 3 to 6-circuit

2	ベースハウジング BASE HOUSING	PA (GF強化) PA (GF)		ナチュラル Natural	UL94V-0
1	ピン PIN	銅合金 COPPER ALLOY	すずめっき TIN PLATED		
品番 No.	部 品 名 PART NAME	材 質 MATERIAL	処 理 SURFACE FINISH	備 考 REMARKS	
サイズ SIZE	単 位 UNIT	投 影 法 PROJECTION	作 図 年 月 日 DATE	納 入 先 CUSTOMER	股
A2	METRIC		MAR. 5. 2024	品 名 SERIES NAME	CZコネクタ サイドタイプ ベース付ピン リード線: 千鳥タイプ HEADER FOR CZ CONNECTOR SIDE TYPE LEAD TYPE: STAGGERED TYPE
			尺 度 SCALE 7:1	形 番 PART No.	S () B-CZHK-B-1 (LF) (SN)
				図 番 DRAWING No.	KRD-55206-2 RO



日本圧着端子製造株式会社
J.S.T. MFG.CO.,LTD.