
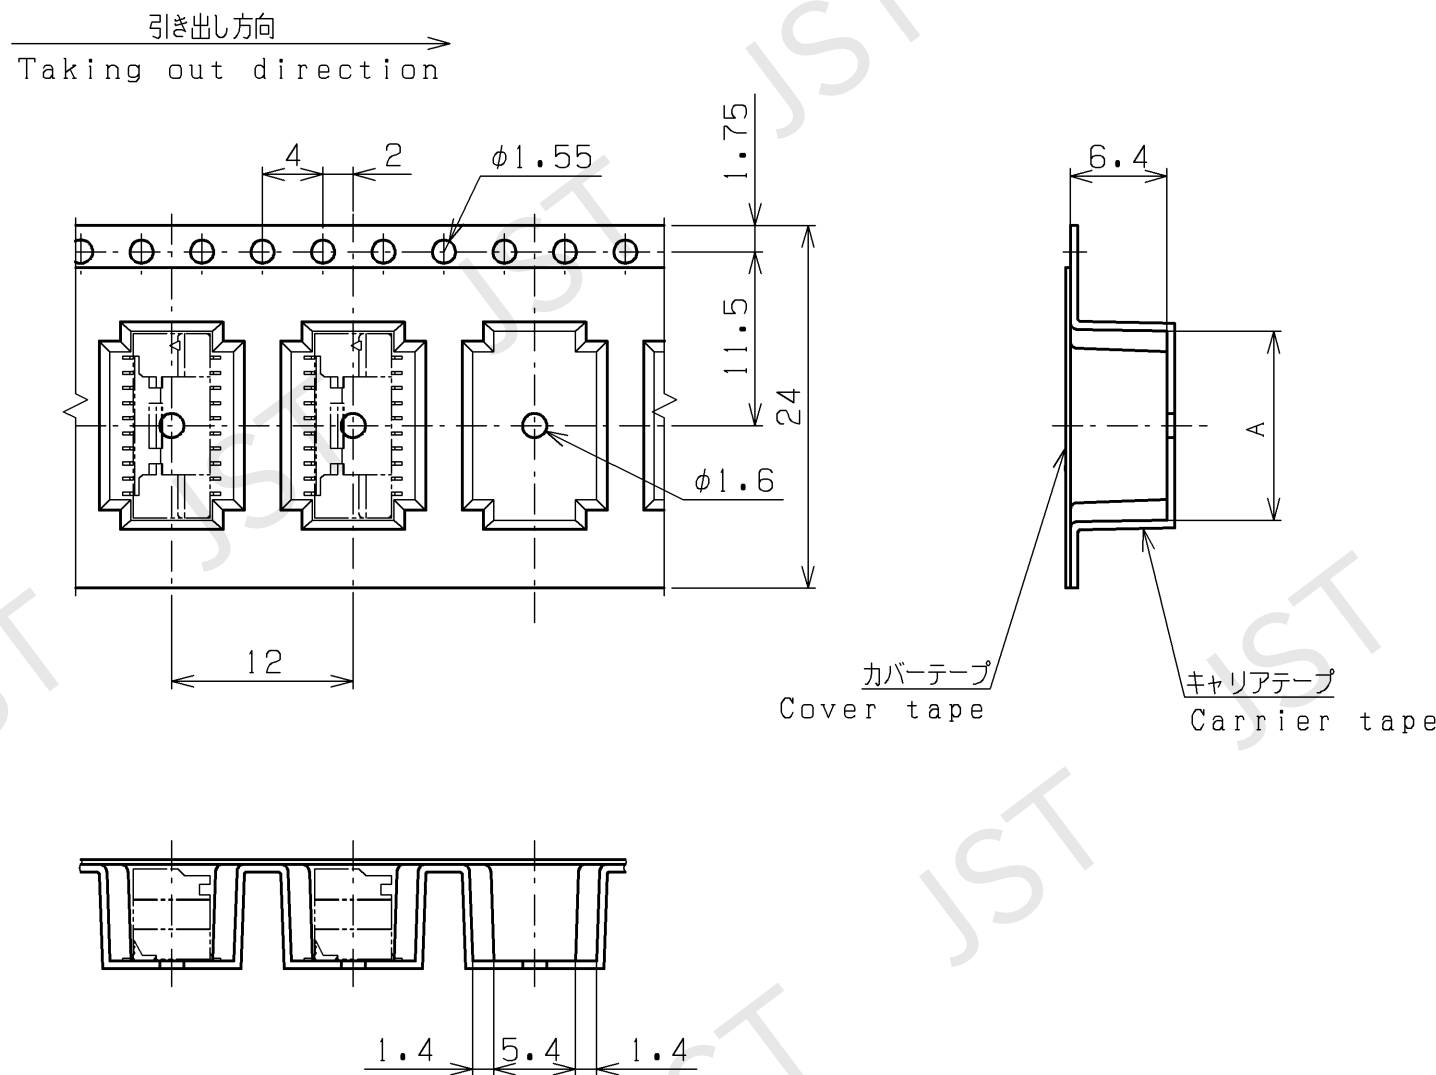



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E
F
G
H

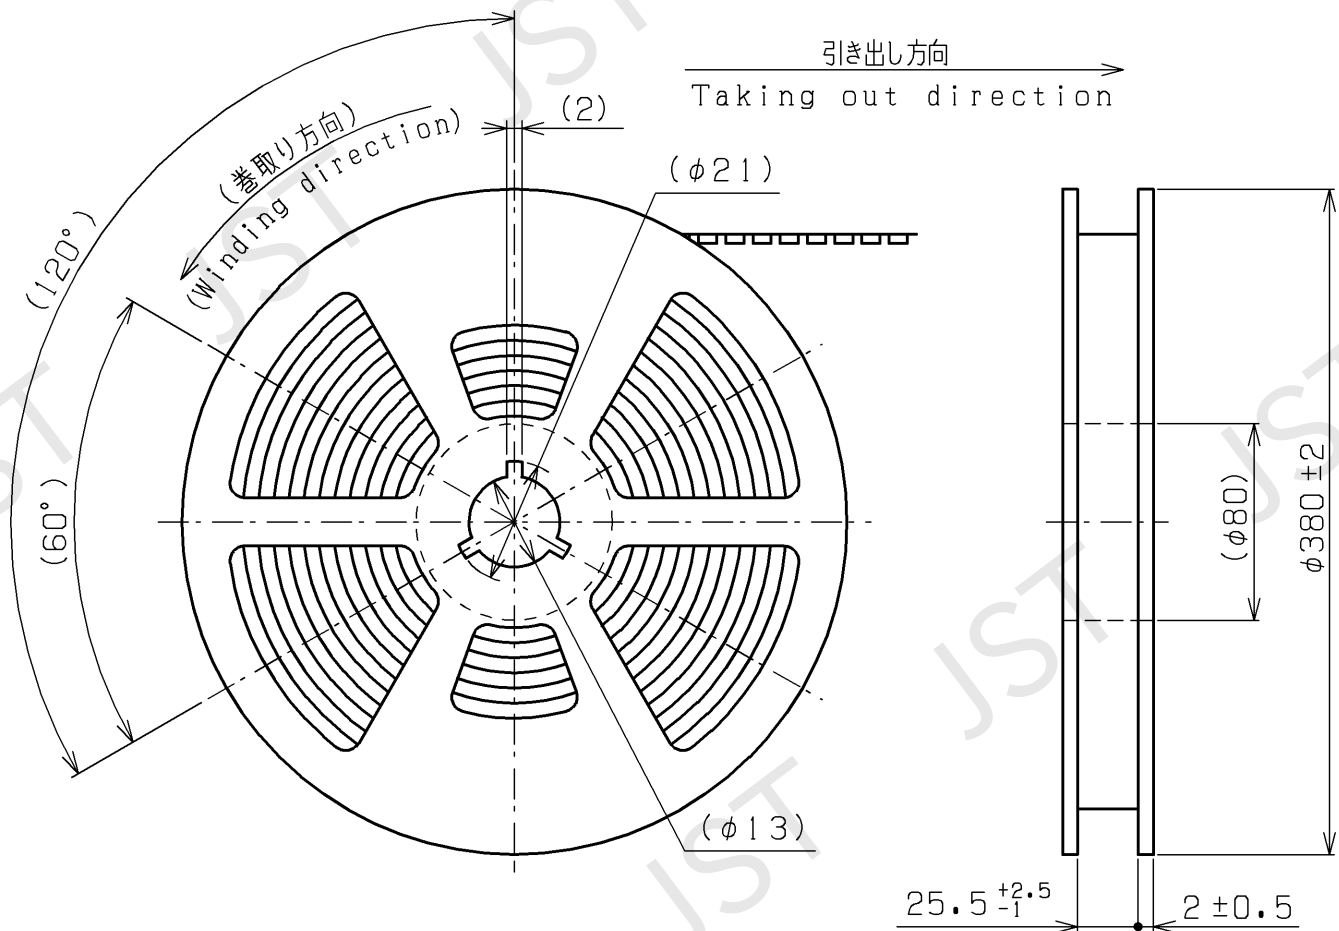


NOTE

1. コネクタ本体については単体の別図面を参照ください。
2. 梱包数量：1000個/リール。
3. リードテープ長さ

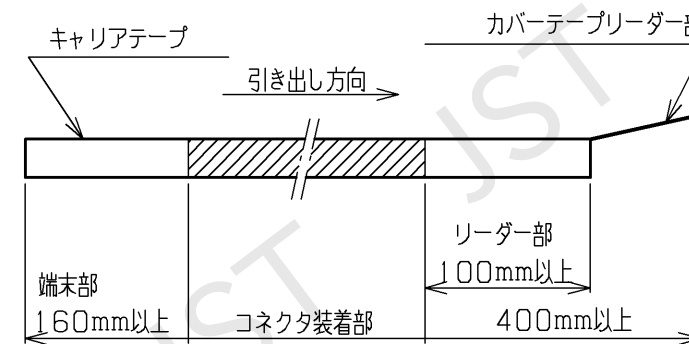

4. カバーテープの剥離強度：0.1~1N (剥離速度300mm/分)

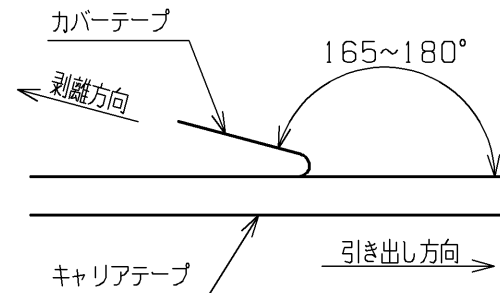

5. 材料：キャリアテープ：ポリスチレン (PS)


カバーテープ : ポリエステル (PET)
リール : フランジ部-ポリスチレン (PS)
コア部-ポリプロピレン (PP)
ポリスチレン (PS)

6. 指定外公差：±0.3


極数 Circuits	A寸法 A-Dimension
16	10.5
20	12.5
24	14.5
28	16.5

NOTE

1. Connector part: See the DWG. of NSHD Connector.
2. Quantity to be packaged: 1000 pcs/reel
3. Leading tape length.

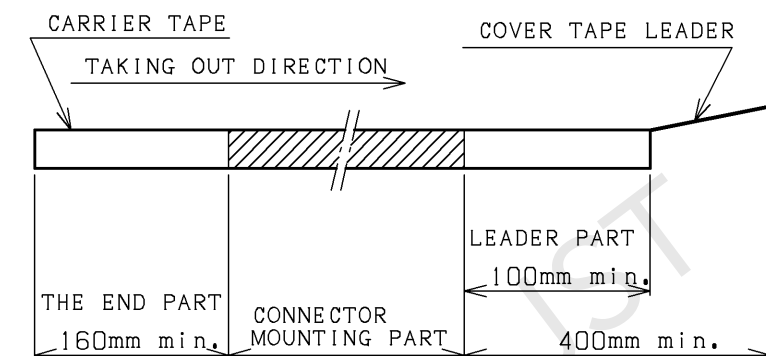

4. Cover tape peel strength: 0.1~1N (Peel speed: 300mm/minute)

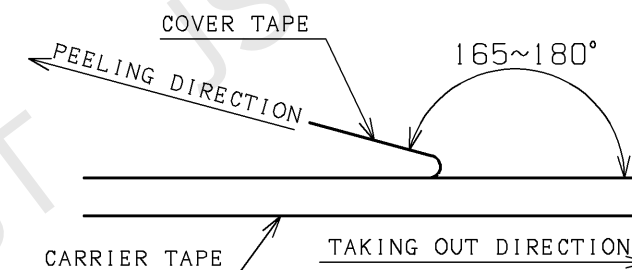

5. Material: Carrier tape; Polystyrene (PS)

Cover tape ; Polyester (PET)
Reel; Flange; Polystyrene (PS)
Core; Polypropylene (PP)
Polystyrene (PS)

6. Unless otherwise specified, tolerances are ±0.3

品番 No.		部品名 PART NAME		材質 MATERIAL		処理 SURFACE FINISH		備考 REMARKS	
サイズ SIZE		単位 UNIT		投影法 PROJECTION		作図年月日 DATE		納入先 CUSTOMER	
A2		METRIC		第一角法 1st Angle		MAR. 22, 2024		品名 SERIES NAME	
								NSHDコネクタ エンボスターピング品	
								NSHD CONNECTOR EMBOSSED-TAPING PRODUCT	
								形番 PART No.	
								SM () B-NSHDZS-TF	
								図番 DRAWING No.	
								KRD-52909-1	
								RO	

JST

日本圧着端子製造株式会社
J.S.T. MFG. CO., LTD.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

