


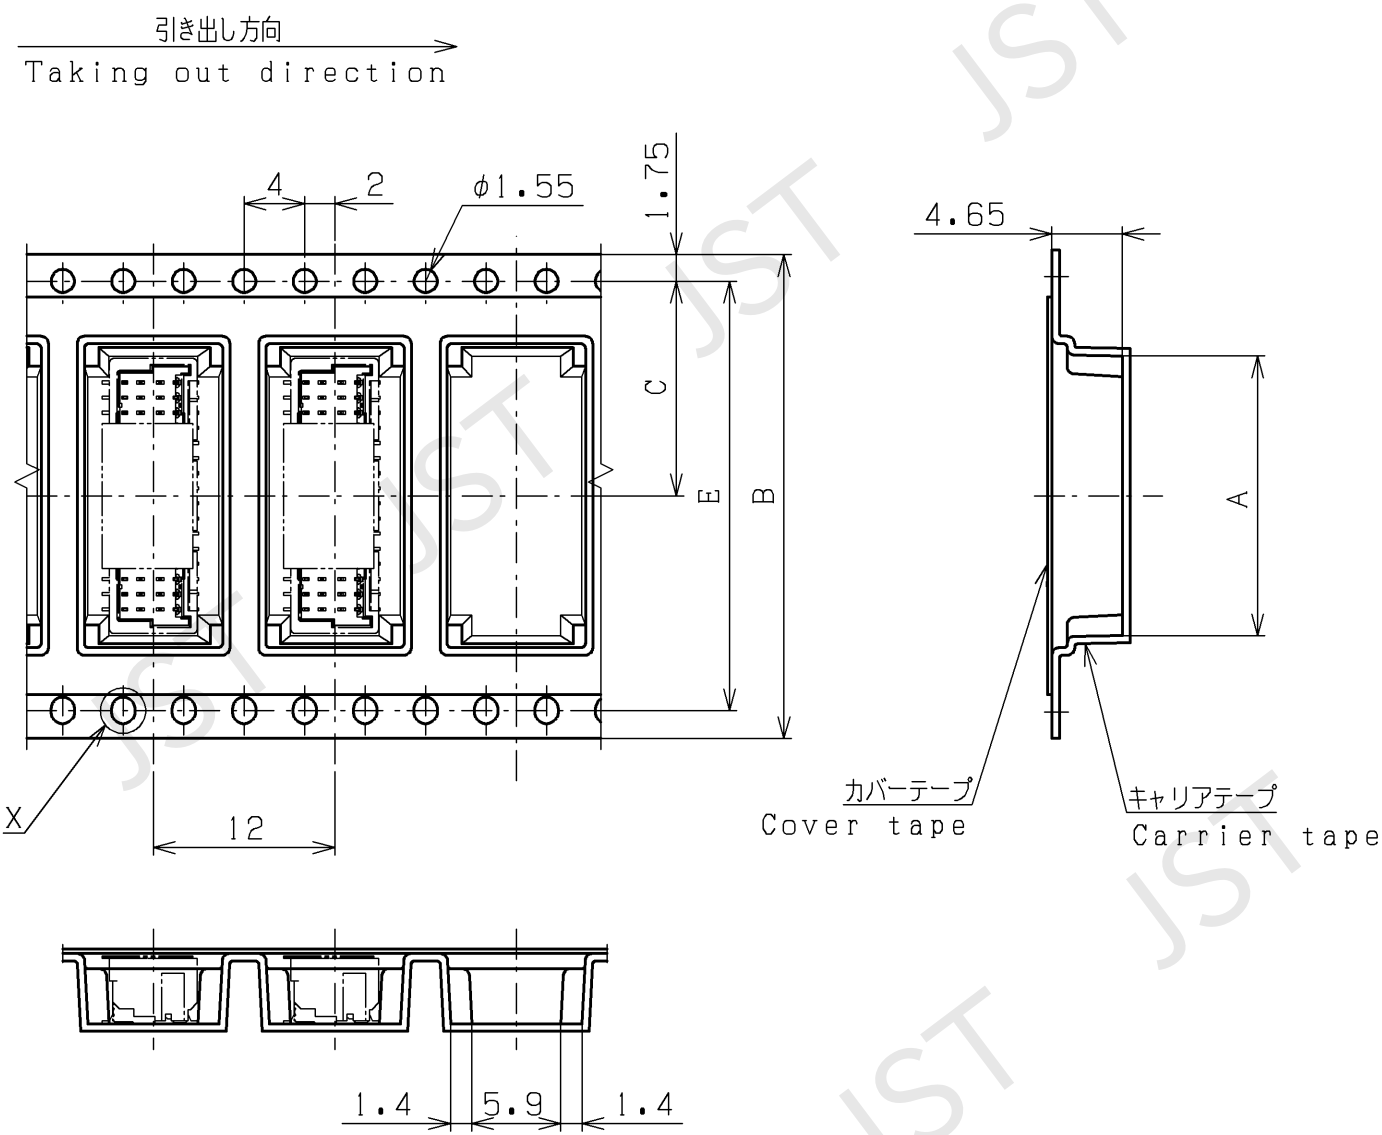


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

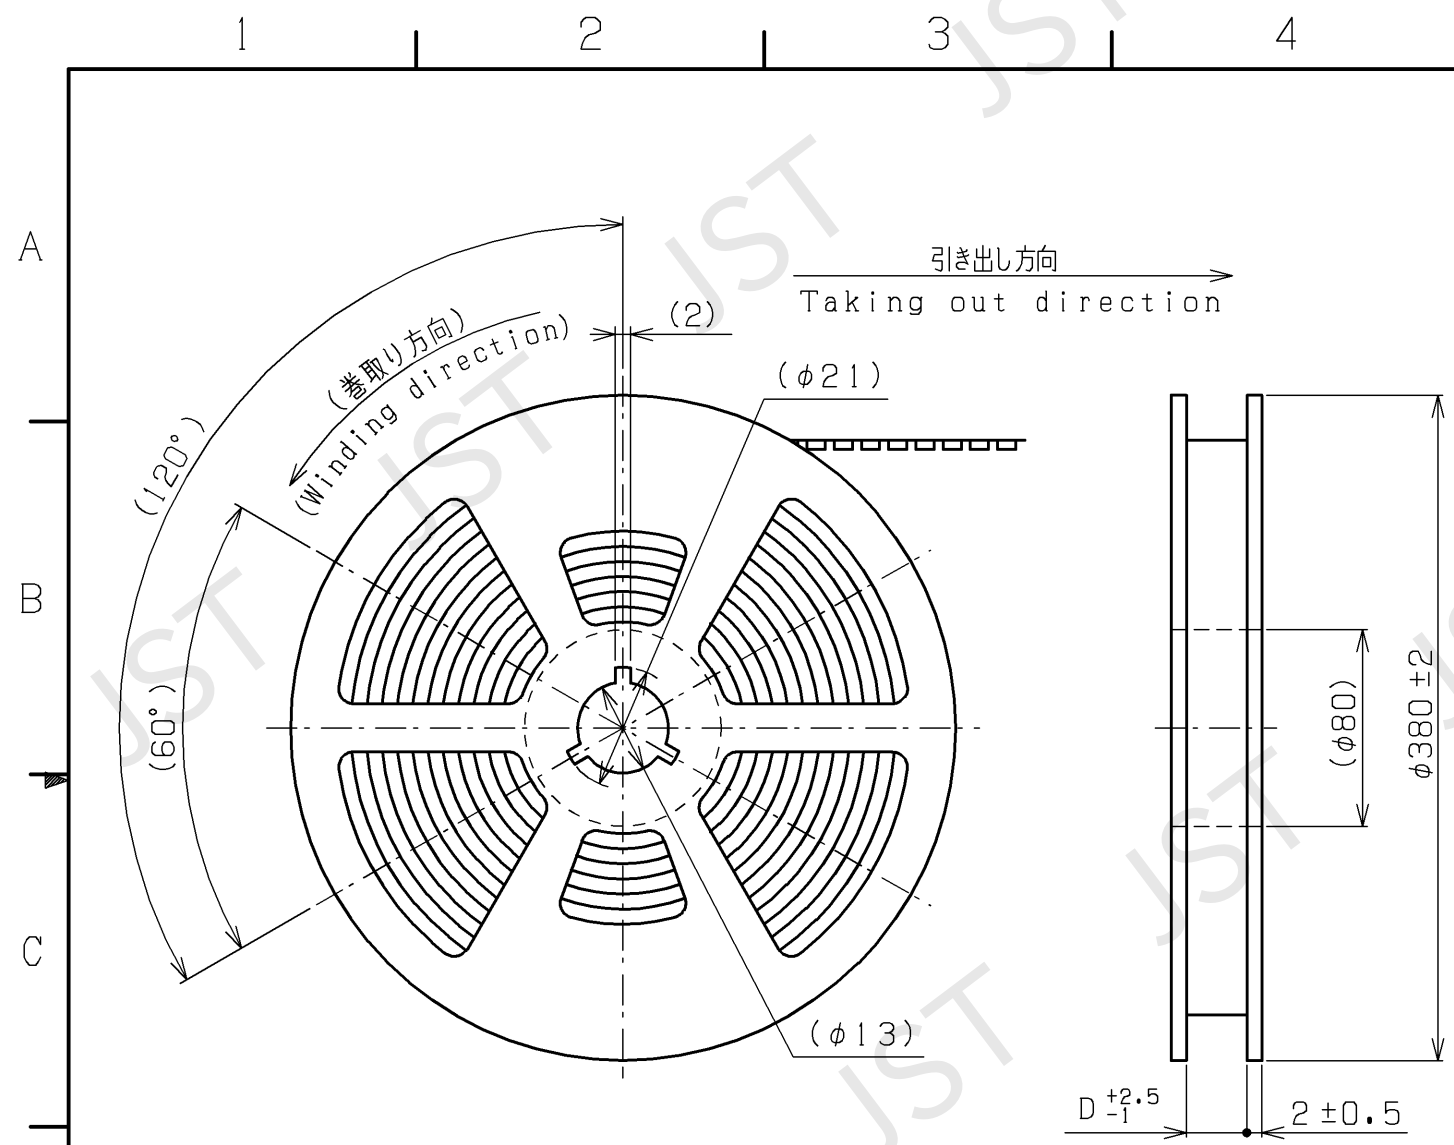


NOTE

- 1.コネクタ本体については単体の別図面を参照ください。
- 2.梱包数量:1600個/リール。
- 3.リードテープ長さ

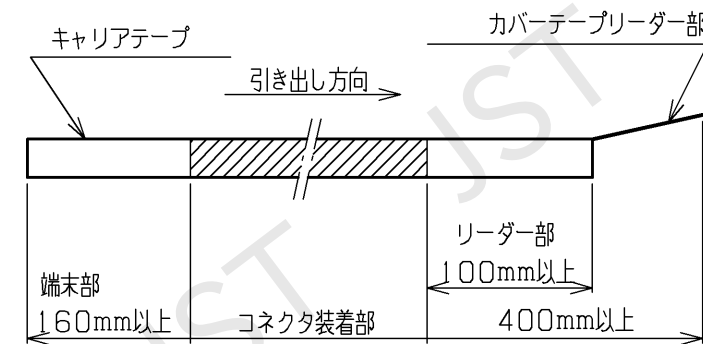

- 4.カバーテープの剥離強度:0.1~1N (剥離速度300mm/分)

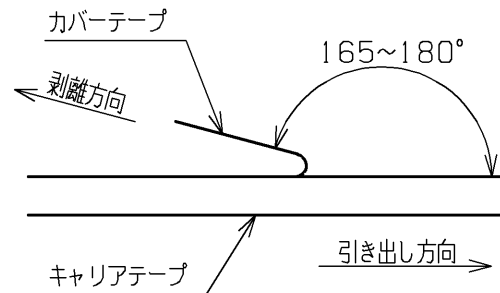

- 5.材料:キャリアテープ:ポリスチレン (PS)

カバーテープ :ポリエステル (PET)

吸着テープ :ポリイミド (PI)

リール :フランジ部 - ポリスチレン (PS)


コア部 - ポリプロピレン (PP)

ポリスチレン (PS)


- 6.指定外公差:±0.3

NOTE

- 1.Connector part:See the DWG. of NSHD Connector.
- 2.Quantity to be packaged:1600pcs/reel
- 3.Leading tape length.

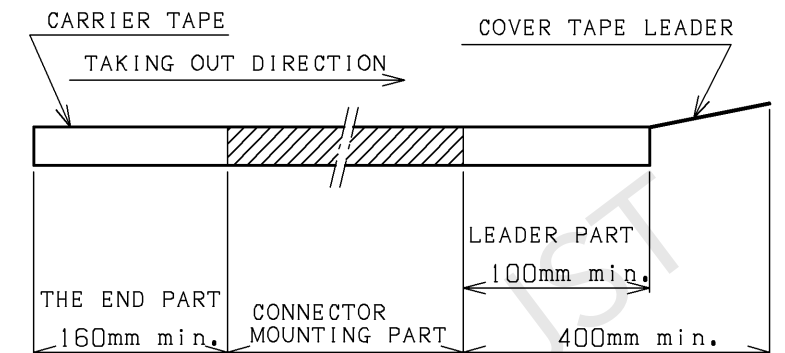

- 4.Cover tape peel strength:0.1~1N (Peel speed:300mm/minute)

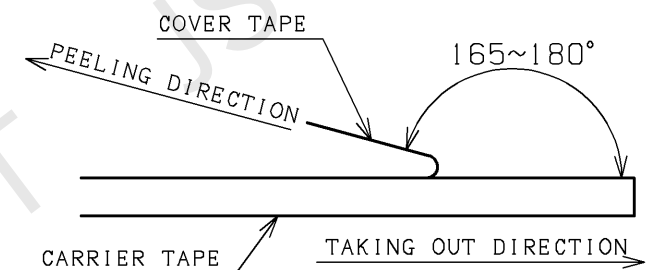

- 5.Material:Carrier tape;Polystyrene (PS)

Cover tape ;Polyester (PET)

Suction tape;Polyimide (PI)


Reel;Flange ;Polystyrene (PS)

Core ;Polypropylene (PP)

Polystyrene (PS)

- 6.Unless otherwise specified, tolerances are ±0.3

極数 Circuits	寸法/Dimensions					
	A	B	C	D	E	F
32	18.5	32	14.2	33.5	28.4	9.6
40	22.5	44	20.2	45.5	40.4	9.6

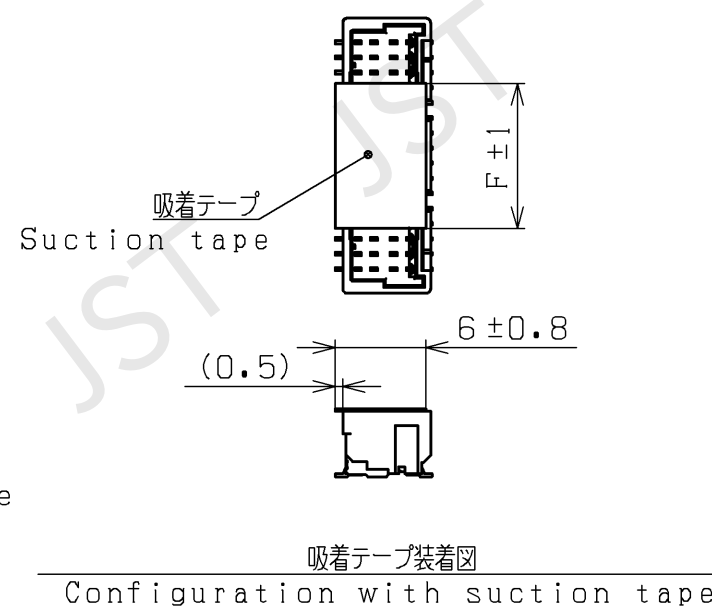

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC		MAR.22.2024	
		尺度 SCALE	品名 SERIES NAME	NSHDコネクタ エンボスターピング品
		2:1	形番 PART No.	BM () B-NSHDZS-1-TFT
			図番 DRAWING No.	KRD-52908-1
				RO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

