
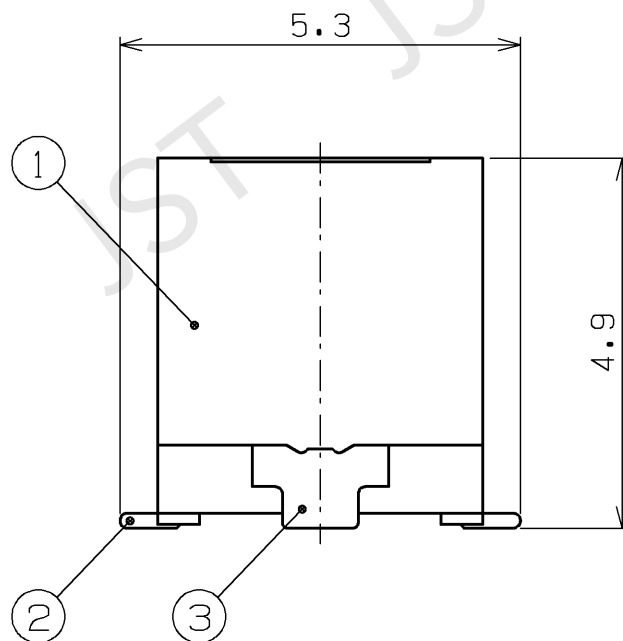


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

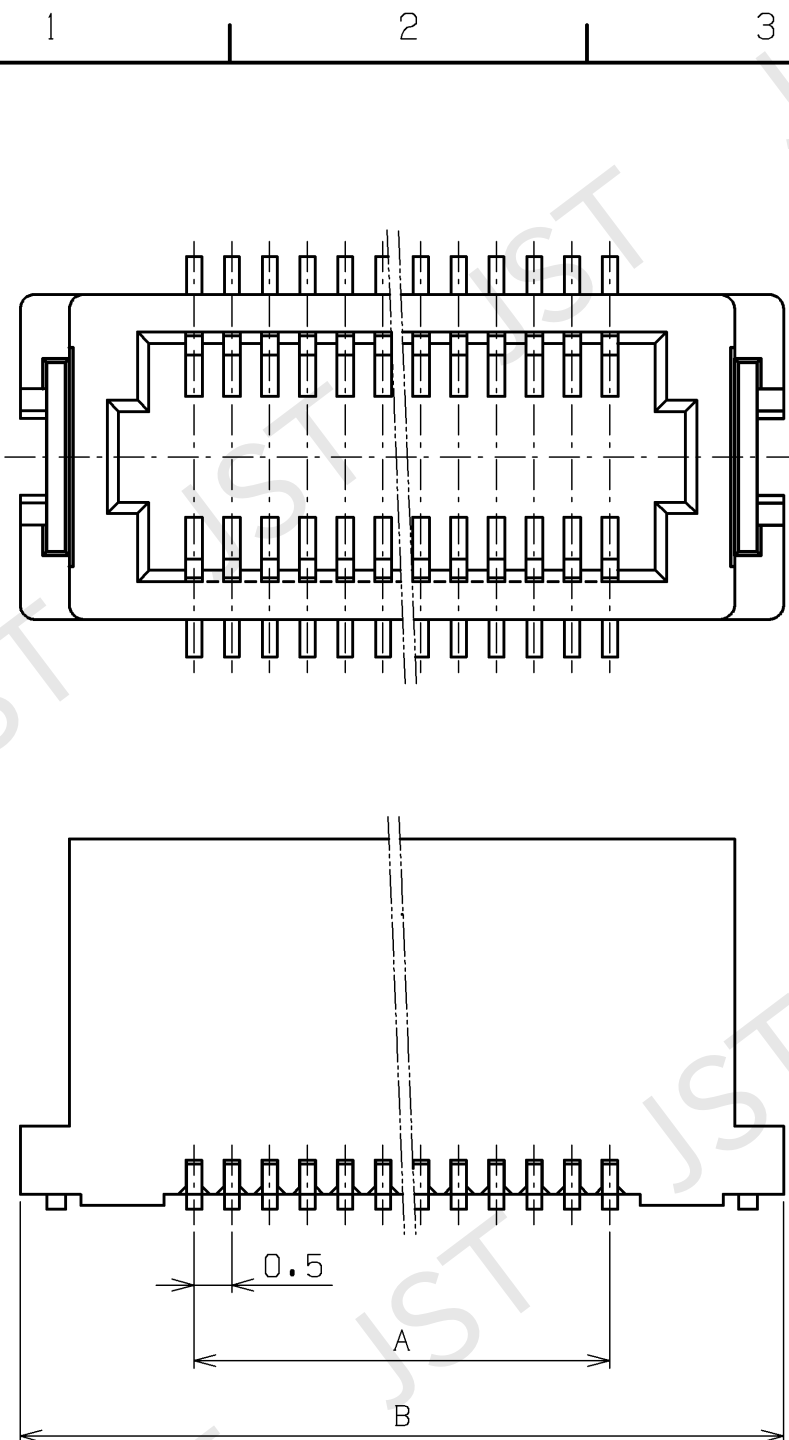


極数 Cir- cuits	寸法 Dimensions	
	A	B
50	12.0	16.6
60	14.5	19.1
70	17.0	21.6

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	
△			0

NOTE
1. 指定外公差: ± 0.3
2. 基板のパターンピッチの公差は累積しないこと。

NOTE
1. Unless otherwise specified,
tolerances are ± 0.3
2. Tolerance of pattern pitch on
PCB are not cumulative.

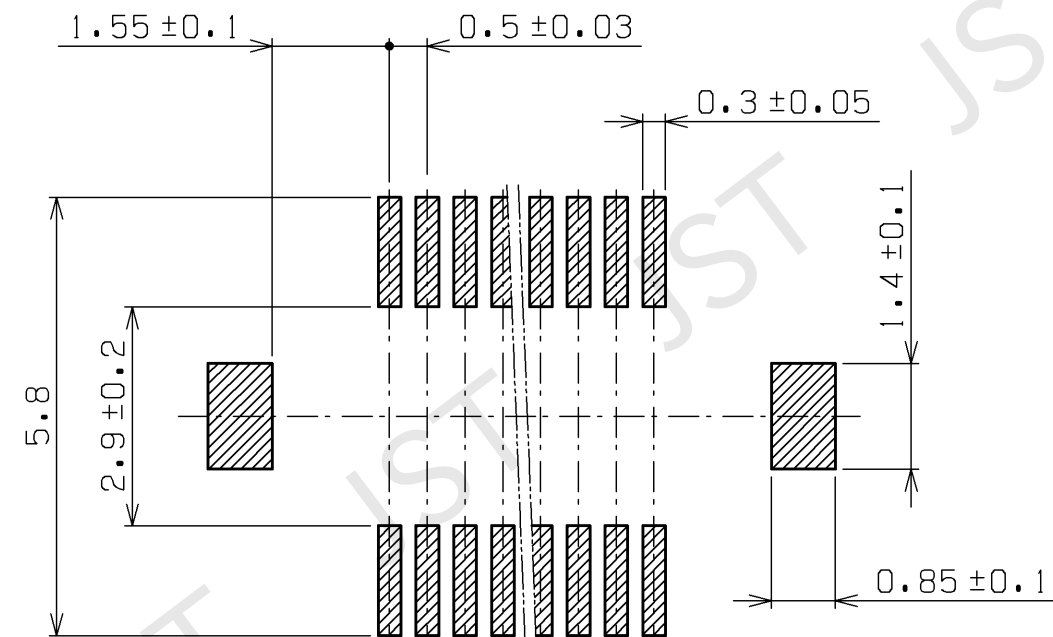

基板パターン推奨寸法
Recommendable P.C.Board layout


3	補強タブ REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
2	コンタクト CONTACT	銅合金 COPPER ALLOY	金めっき GOLD PLATED	
1	ベースハウジング BASE HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)		UL94V-0 ナチュラル NATURAL
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAY.24.2024	
日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.				品名 SERIES NAME
				JMD コネクタ トッププラグ スタック高さ:6.0mm JMD CONNECTOR TOP PLUG (STACK HEIGHT:6.0mm)
				形番 PART No.
				() P6.0-JMDSS-G-1 (LF) (SN)
				図番 DRAWING No.
				KRD-55528 R0

NOTE

1. Connector part: See the DWG. of header for JMD connector.


2. Quantity to be packaged: 1500 pcs/reel

3. Leading tape length.

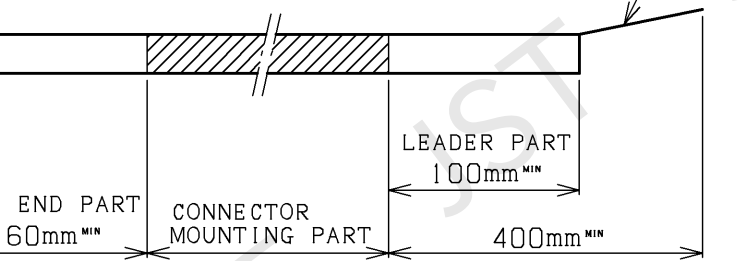

The diagram illustrates the layout of a carrier tape. It is divided into three main sections: 'THE END PART' with a width of 160mm, 'CONNECTOR MOUNTING PART' with a width of 400mm, and 'LEADER PART' with a width of 100mm. The 'COVER TAPE LEADER' is shown at the top right, and the 'TAKING OUT DIRECTION' is indicated by an arrow pointing right. A break symbol is shown in the middle of the tape.

4. Cover tape peel strength: 0.1~1N
(Peel speed: 300mm/minute)

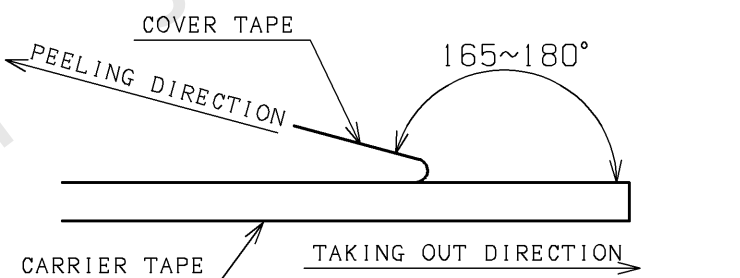

This diagram shows the cover tape being peeled from the carrier tape. The 'COVER TAPE' is being lifted at an angle of 165~180 degrees. The 'PEELING DIRECTION' is indicated by an arrow pointing left, and the 'TAKING OUT DIRECTION' is indicated by an arrow pointing right. The 'CARRIER TAPE' is shown at the bottom.

5. Material: Carrier tape; Polyester (PET)
Polystyrene (PS)
Cover tape ; Polyester (PET)
Reel; Flange; Polystyrene (PS)
Core; Polypropylene (PP)
Polystyrene (PS)

6. Unless otherwise specified,
tolerances are ± 0.3

[illegible]

極數 Circuits	寸法/Dimensions				
	B0	F	S	W	W1
50	16.95	11.5	-	24	25.5
60	19.45	14.2	28.4	32	33.5
70	21.95	14.2	28.4	32	33.5

品 番 No.		部 品 名 PART NAME		材 質 MATERIAL		処 理 SURFACE FINISH		備 考 REMARKS	
サイズ SIZE A2		単 位 UNIT METRIC		投 影 法 PROJECTION 		作 図 年 月 日 DATE MAY.27.2024		納 入 先 CUSTOMER	
						尺 度 SCALE 2:1		品 名 SERIES NAME JMDコネクタ トッププラグ スタック高さ:6.0mm用インボスタ JMD CONNECTOR TOP PLUG STACK HEIGHT 6.0mm EMBOSS TAPE	
						形 番 PART No. () P6.0-JMDS-G-1-TF (LF) (SN)			
						図 番 DRAWING No. KRD-55529		RO	



日本圧着端子製造株式会社

J.S.T. MFG.CO.,LTD.