



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION.
IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

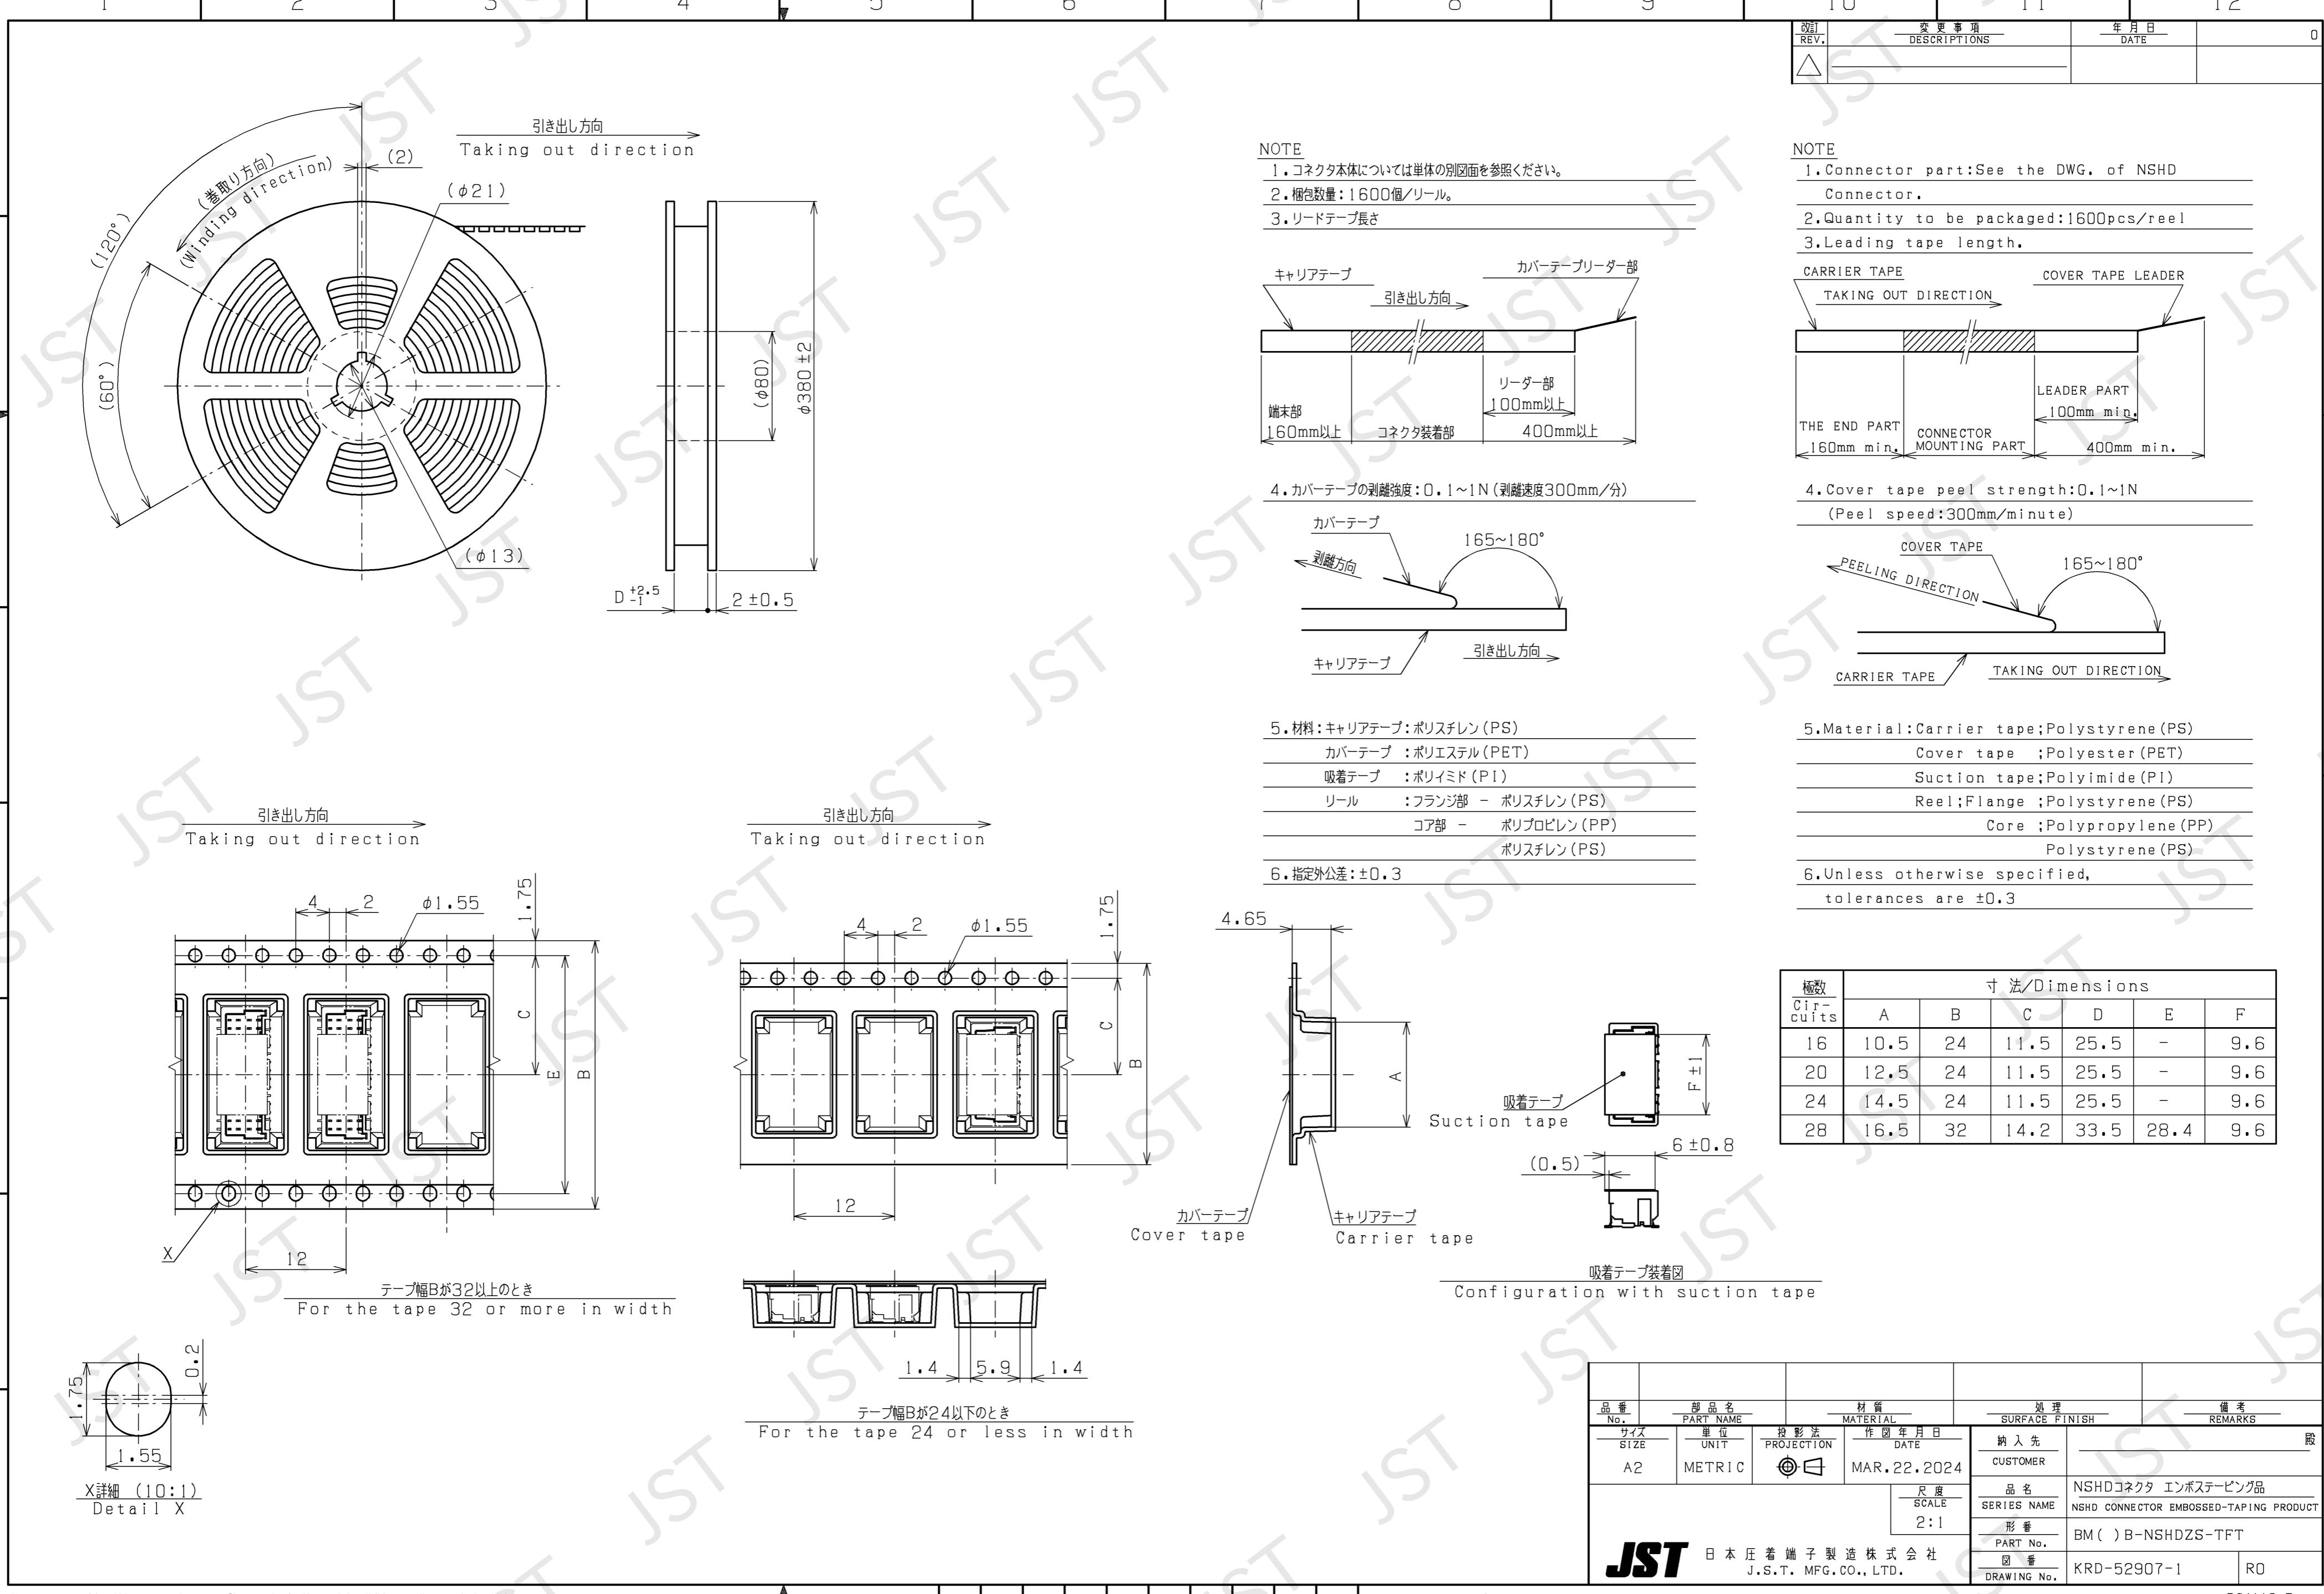


1 2 3 4 5 6 7 8 9 10 11 12

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE
△		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION.
IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

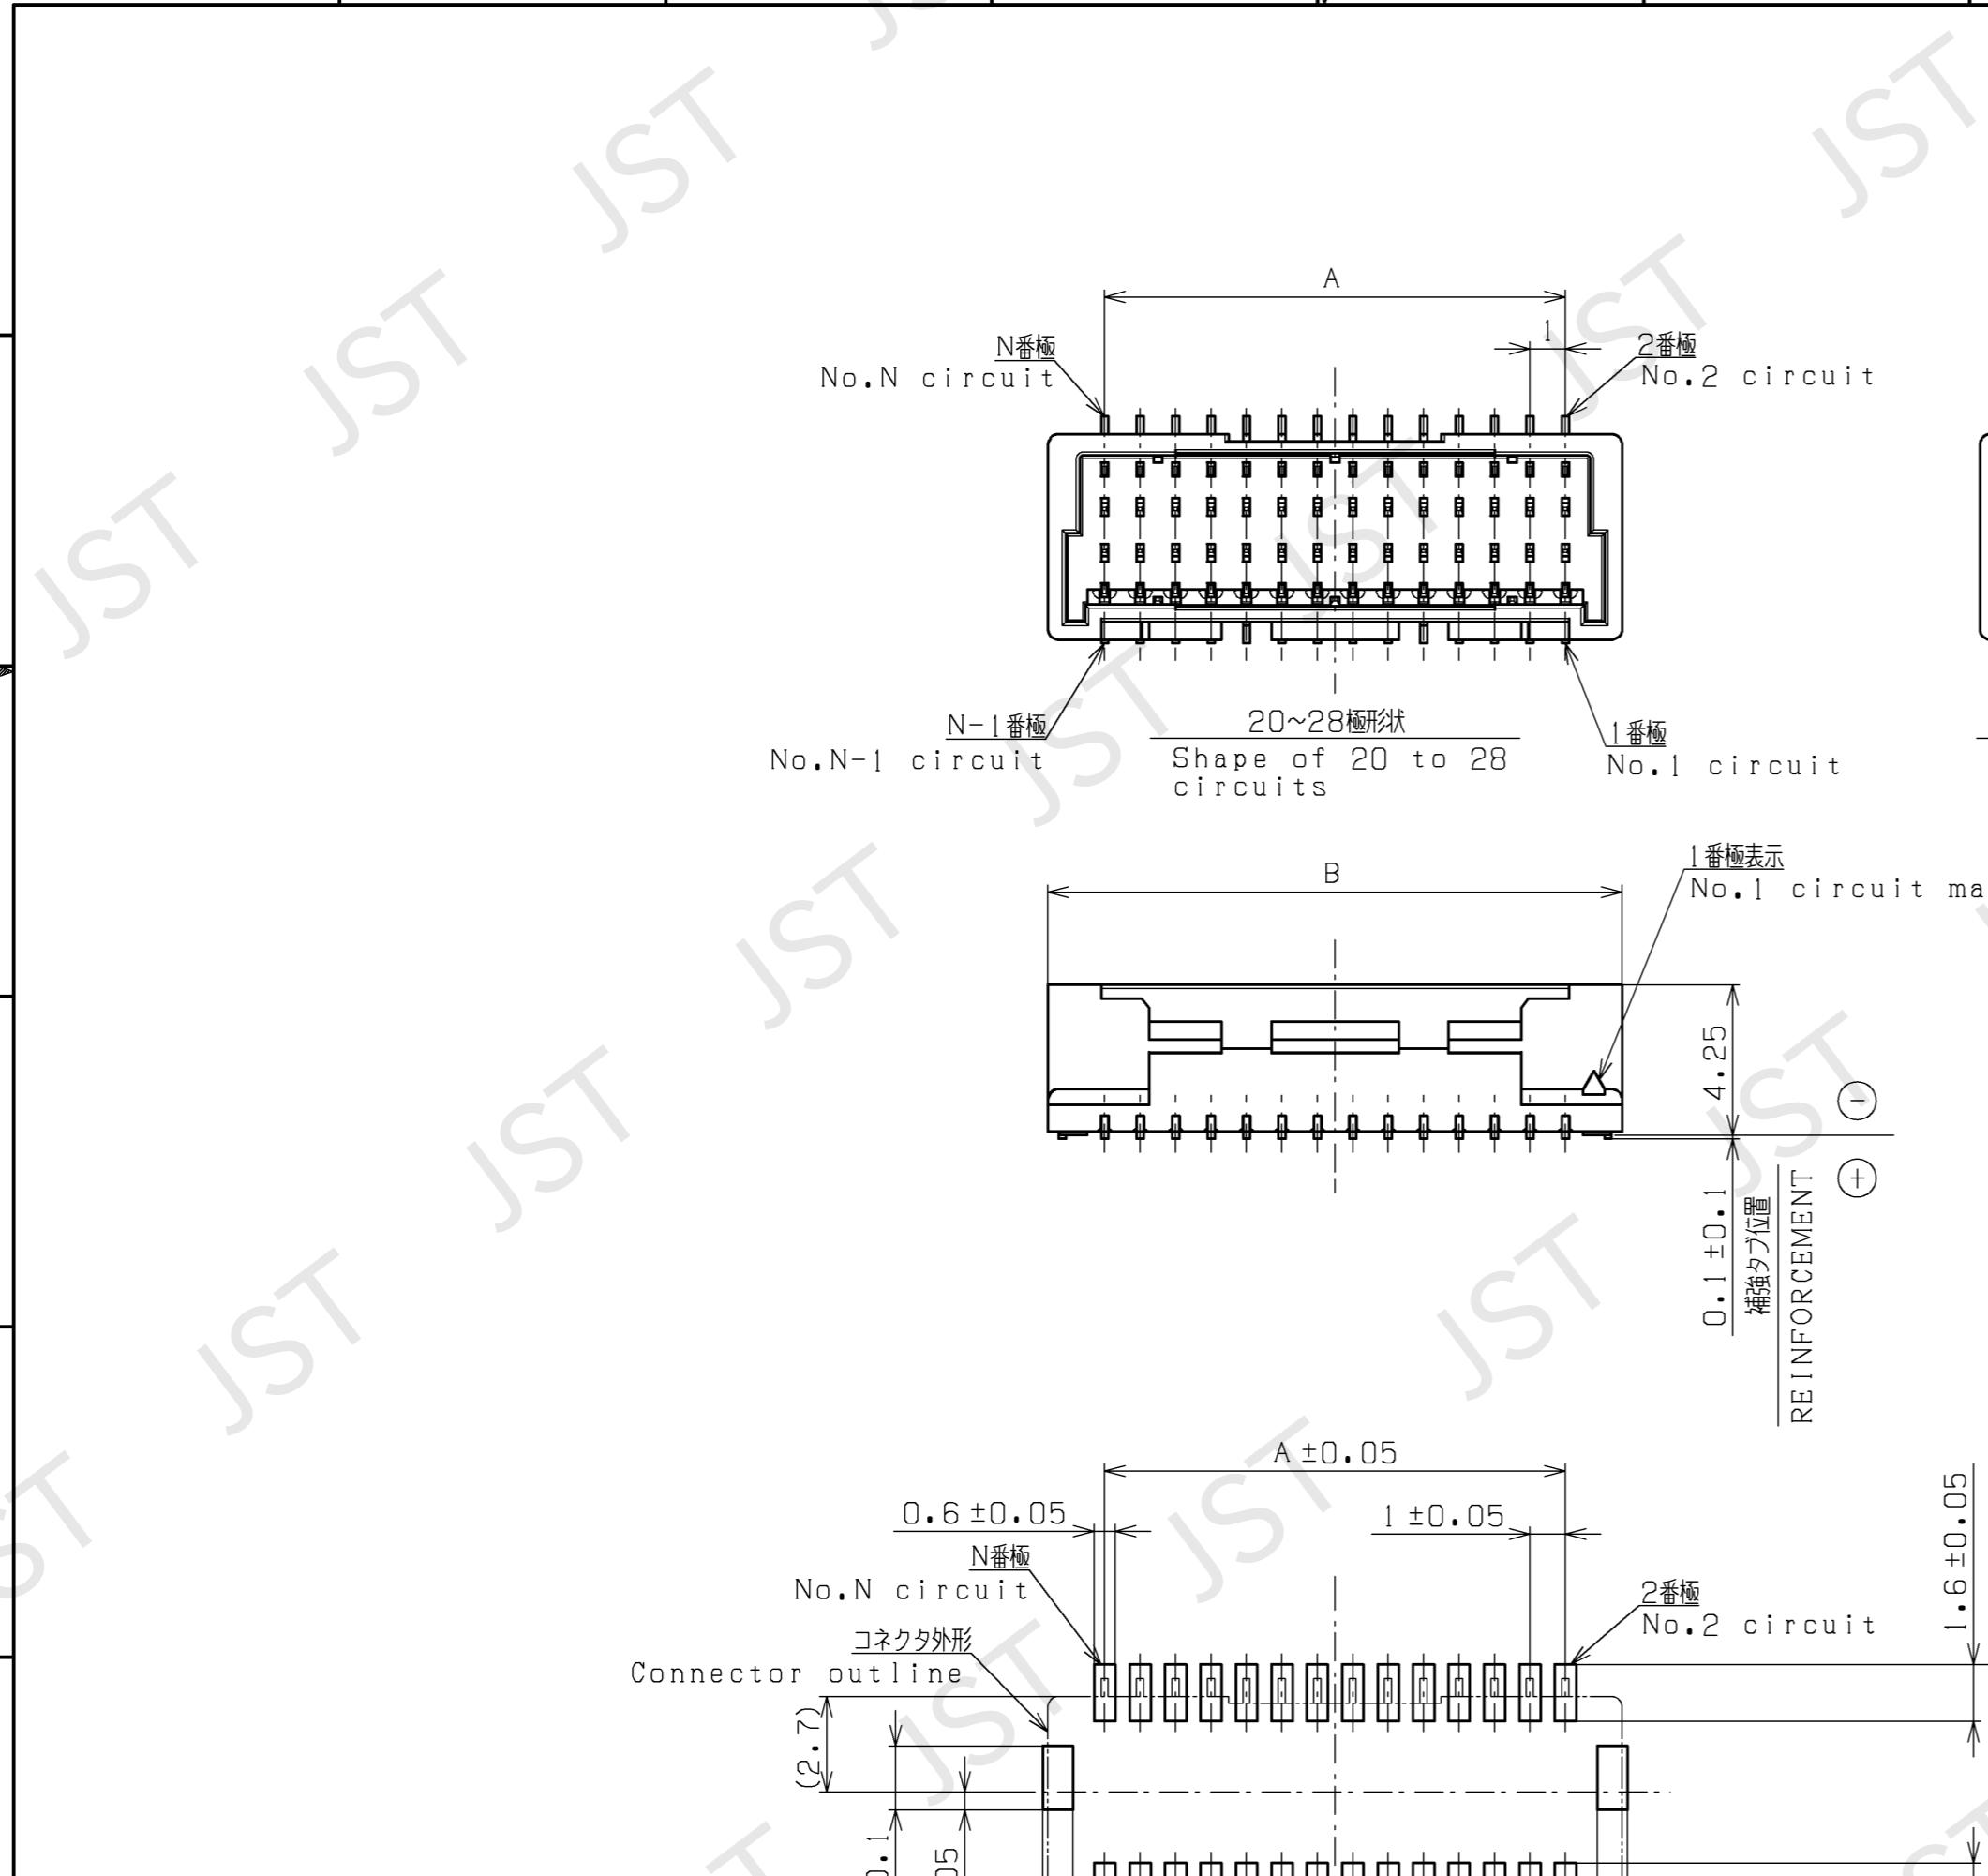

推奨パターンレイアウト (コネクタ装着側)
Recommendable pattern layout
(Connector mounted side)

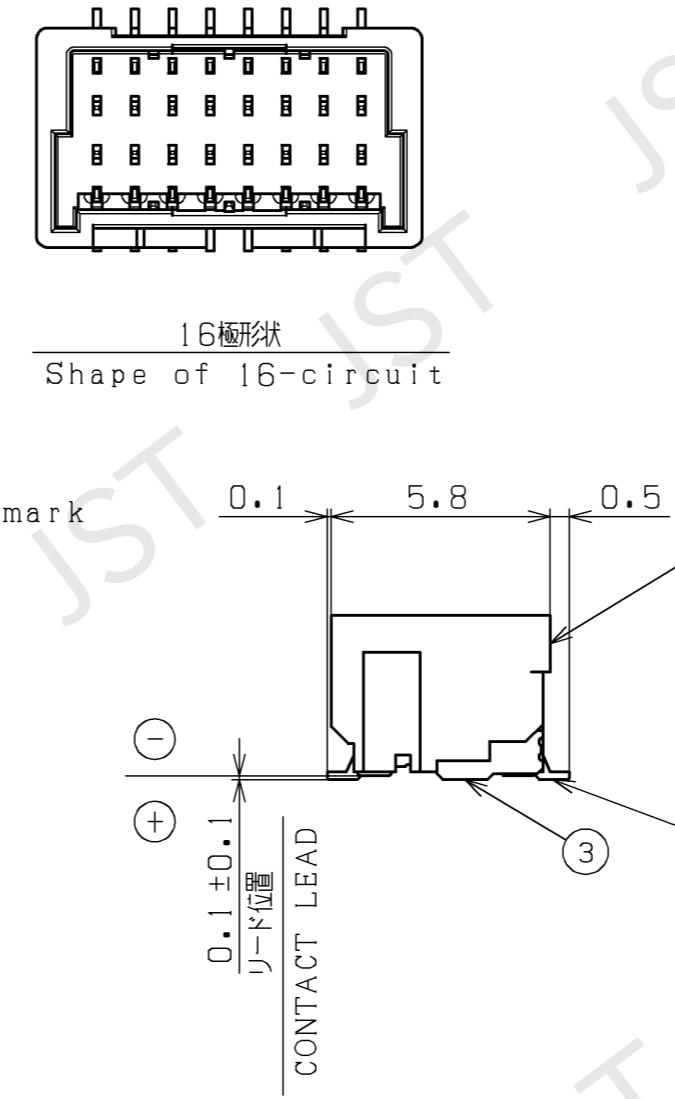

極数 Circuits	寸法/Dimensions		
	A	B	C
16	7.0	10.2	8.8
20	9.0	12.2	10.8
24	11.0	14.2	12.8
28	13.0	16.2	14.8

品番 No.	部品名 PART NAME	材質 MATERIAL	作図年月日 DATE		納入先 CUSTOMER	品名 SERIES NAME	形番 PART No.	図番 DRAWING No.	備考 REMARKS
			SIZE	UNIT					
3	補強タブ REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED						
2	ベースハウジング BASE HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)	UL94V-0, アイボリー IVORY						
1	ベースコンタクト BASE CONTACT	銅合金 COPPER ALLOY	すずめっき TIN PLATED						

JST

日本圧着端子製造株式会社
J.S.T. MFG. CO., LTD.

COPYRIGHT © 2024 J.S.T. MFG. CO., LTD.

EC4119-5

20240408TE390419