

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A

B


C

D

E

F


改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

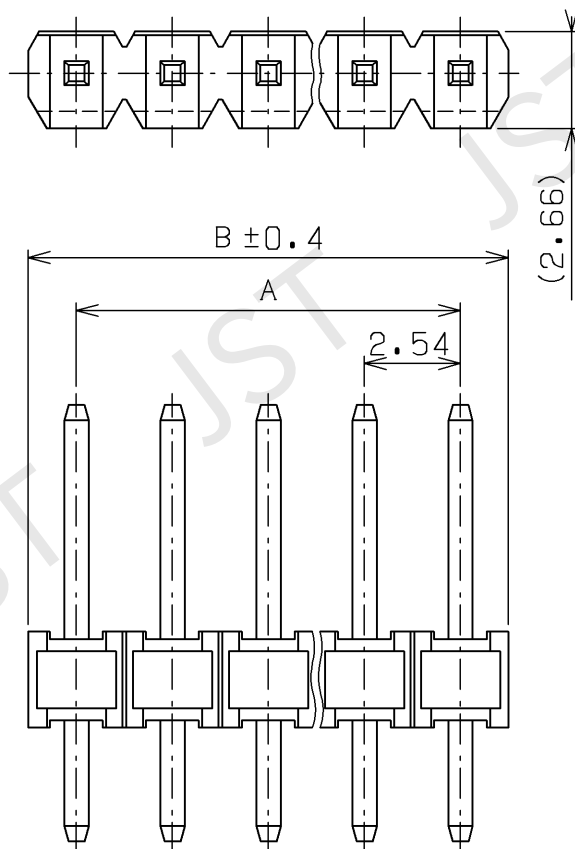

NOTE

1. 一般公差: ± 0.3

NOTE

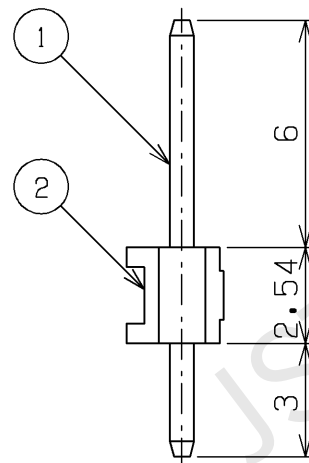1. Unless otherwise specified, tolerances are ± 0.3 .

10	22.86	25.40	20	48.26	50.80	30	73.66	76.20
9	20.32	22.86						
8	17.78	20.32						
7	15.24	17.78						
6	12.70	15.24	16	38.10	40.64			
5	10.16	12.70						
4	7.62	10.16	14	33.02	35.56			
3	5.08	7.62						
2	2.54	5.08	12	27.94	30.48			
1	0	2.54				21	50.80	53.34
極数 Circuits	A	B	極数 Circuits	A	B	極数 Circuits	A	B

2	ベース BASE HOUSING	PBT (GF強化) PBT (GF)		UL94V-0, 黒 BLACK
1	ポスト POST	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A4	METRIC		JUN. 4. 2024	
JST 日本圧着端子製造株式会社 J.S.T.MFG.CO., LTD.				品名 PART NAME
				RE コネクタ RE CONNECTOR
				形番 PART No.
				RE-H () 2TD-1190 (LF) (SN)
				図番 DRAWING No.
				KRD-34691-3
				RO

本図面はJST所有の情報であり、書面による許可なく無断で使用、改変、複製または公開する行為を禁止する。
日本語と英語の表現上齟齬又は紛議が生じた時は、日本語が優先する。

COPYRIGHT © 2024 J.S.T. MFG.CO., LTD. EC4121-5

20240607OE401396