


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

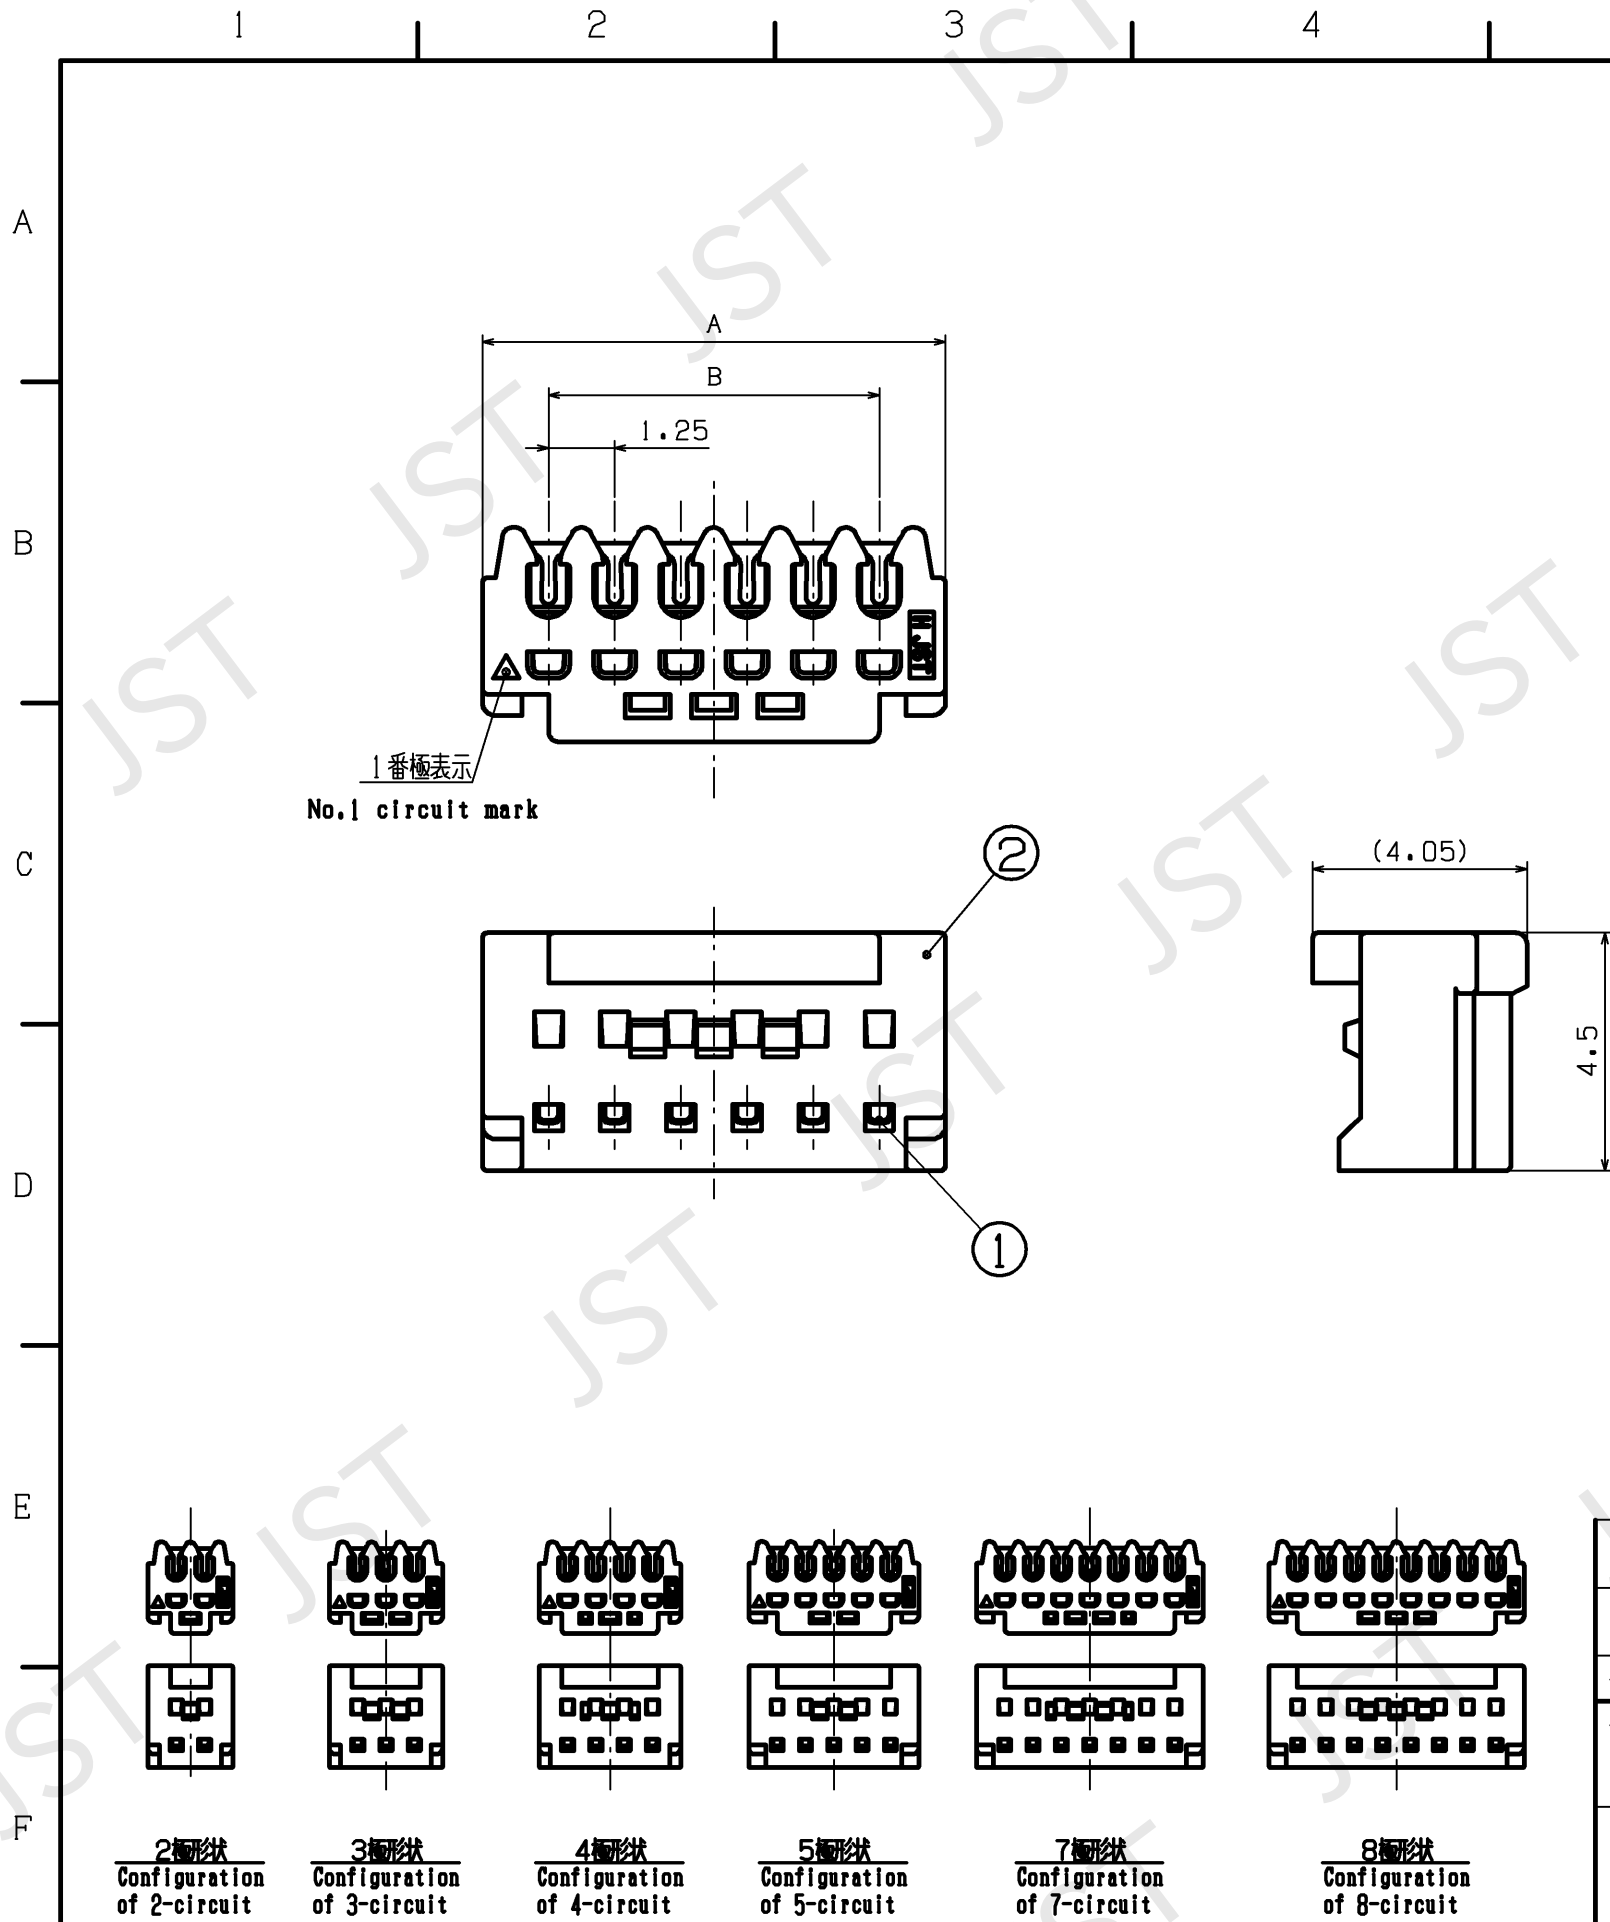

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

NOTE

1. 指定公差 $0 < L \leq 3$: ± 0.3
 $3 < L$: ± 0.4
2. 形番: () GX-6S
- 極数2ケタ表示 (例/2極:02) ↑ ナチュラル

NOTE

1. Unless otherwise specified, tolerances are: $0 < L \leq 3.0$: ± 0.3
 $3.0 < L$: ± 0.4
2. Part No.: () GX-6S
- Number of circuits in two-digit figure. (ex./2-circuit:02) ↑ Natural

極数 Circuits	A	B
02	3.75	
03	5.0	2.5
04	6.25	3.75
05	7.5	5.0
06	8.75	6.25
07	10.0	7.5
08	11.25	8.75

2	ハウジング HOUSING	PBT (GF強化) PBT (GF)		ナチュラル Natural	UL94V-0
1	コンタクト CONTACT	銅合金 COPPER ALLOY	すずめっき TIN PLATED		
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS	
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER	殿
A3	METRIC		MAY.24.2024	品名 SERIES NAME	GXコネクタ ソケット (2極~8極) GX CONNECTOR SOCKET (for 2to8-circuit)
日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.				形番 PART No.	() GX-6S
				図番 DRAWING No.	KRD-54375-1
					R0