
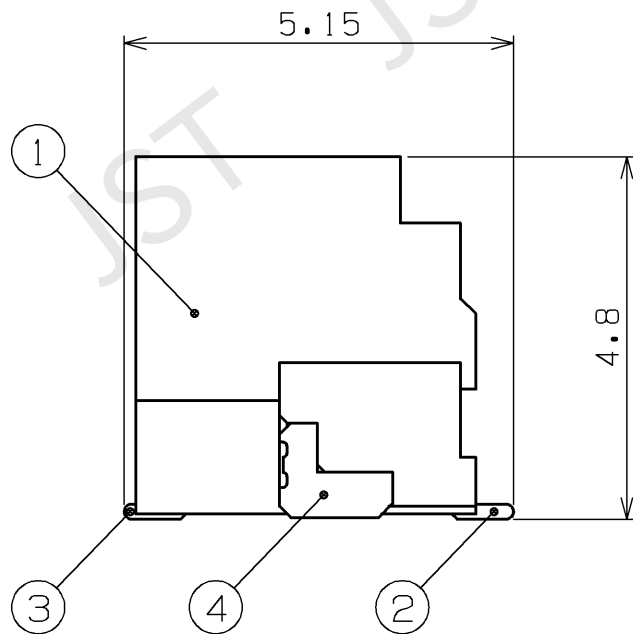


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

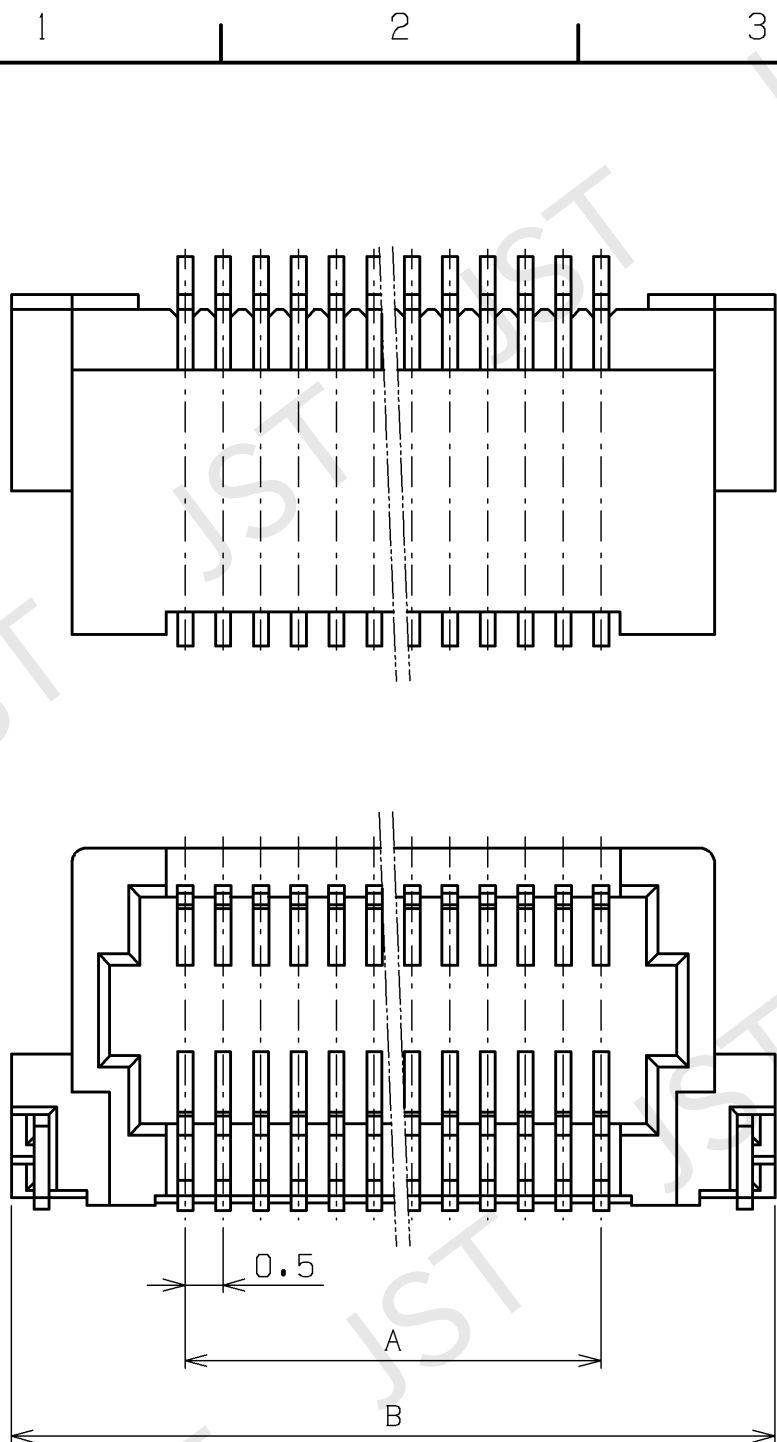


極数 Circuits	寸法 Dimensions	
	A	B
20	4.5	9.1
30	7.0	11.6
40	9.5	14.1
50	12.0	16.6
60	14.5	19.1
70	17.0	21.6
80	19.5	24.1
100	24.5	29.1

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			

- NOTE
- 1. 指定外公差: ± 0.3
 - 2. 基板のパターンピッチの公差は累積しないこと。


- NOTE
- 1. Unless otherwise specified, tolerances are ± 0.3
 - 2. Tolerance of pattern pitch on PCB are not cumulative.

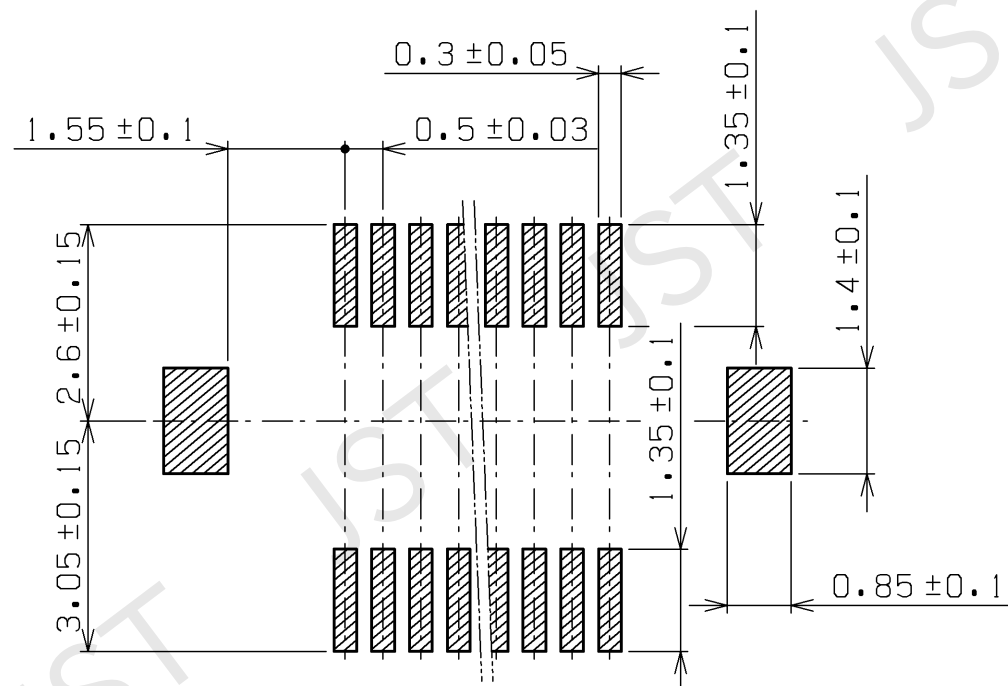

基板パターン推奨寸法
Recommendable P.C.Board layout


4	補強タブ REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
3	コンタクト B CONTACT B	銅合金 COPPER ALLOY	金めっき GOLD PLATED	
2	コンタクト A CONTACT A	銅合金 COPPER ALLOY	金めっき GOLD PLATED	
1	ベースハウジング BASE HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)		UL94V-0 ナチュラル NATURAL
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		MAY.24.2024	品名 SERIES NAME
日本圧着端子製造株式会社 J.S.T. MFG.CO.,LTD.				JMD コネクタ サイドプラグ
				図番 DRAWING No.
				KRD-33876-3
尺度 SCALE				形番 PART No.
10:1				() PS-JMDSS-G-1 (LF) (SN)
				図番 DRAWING No.
				R0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

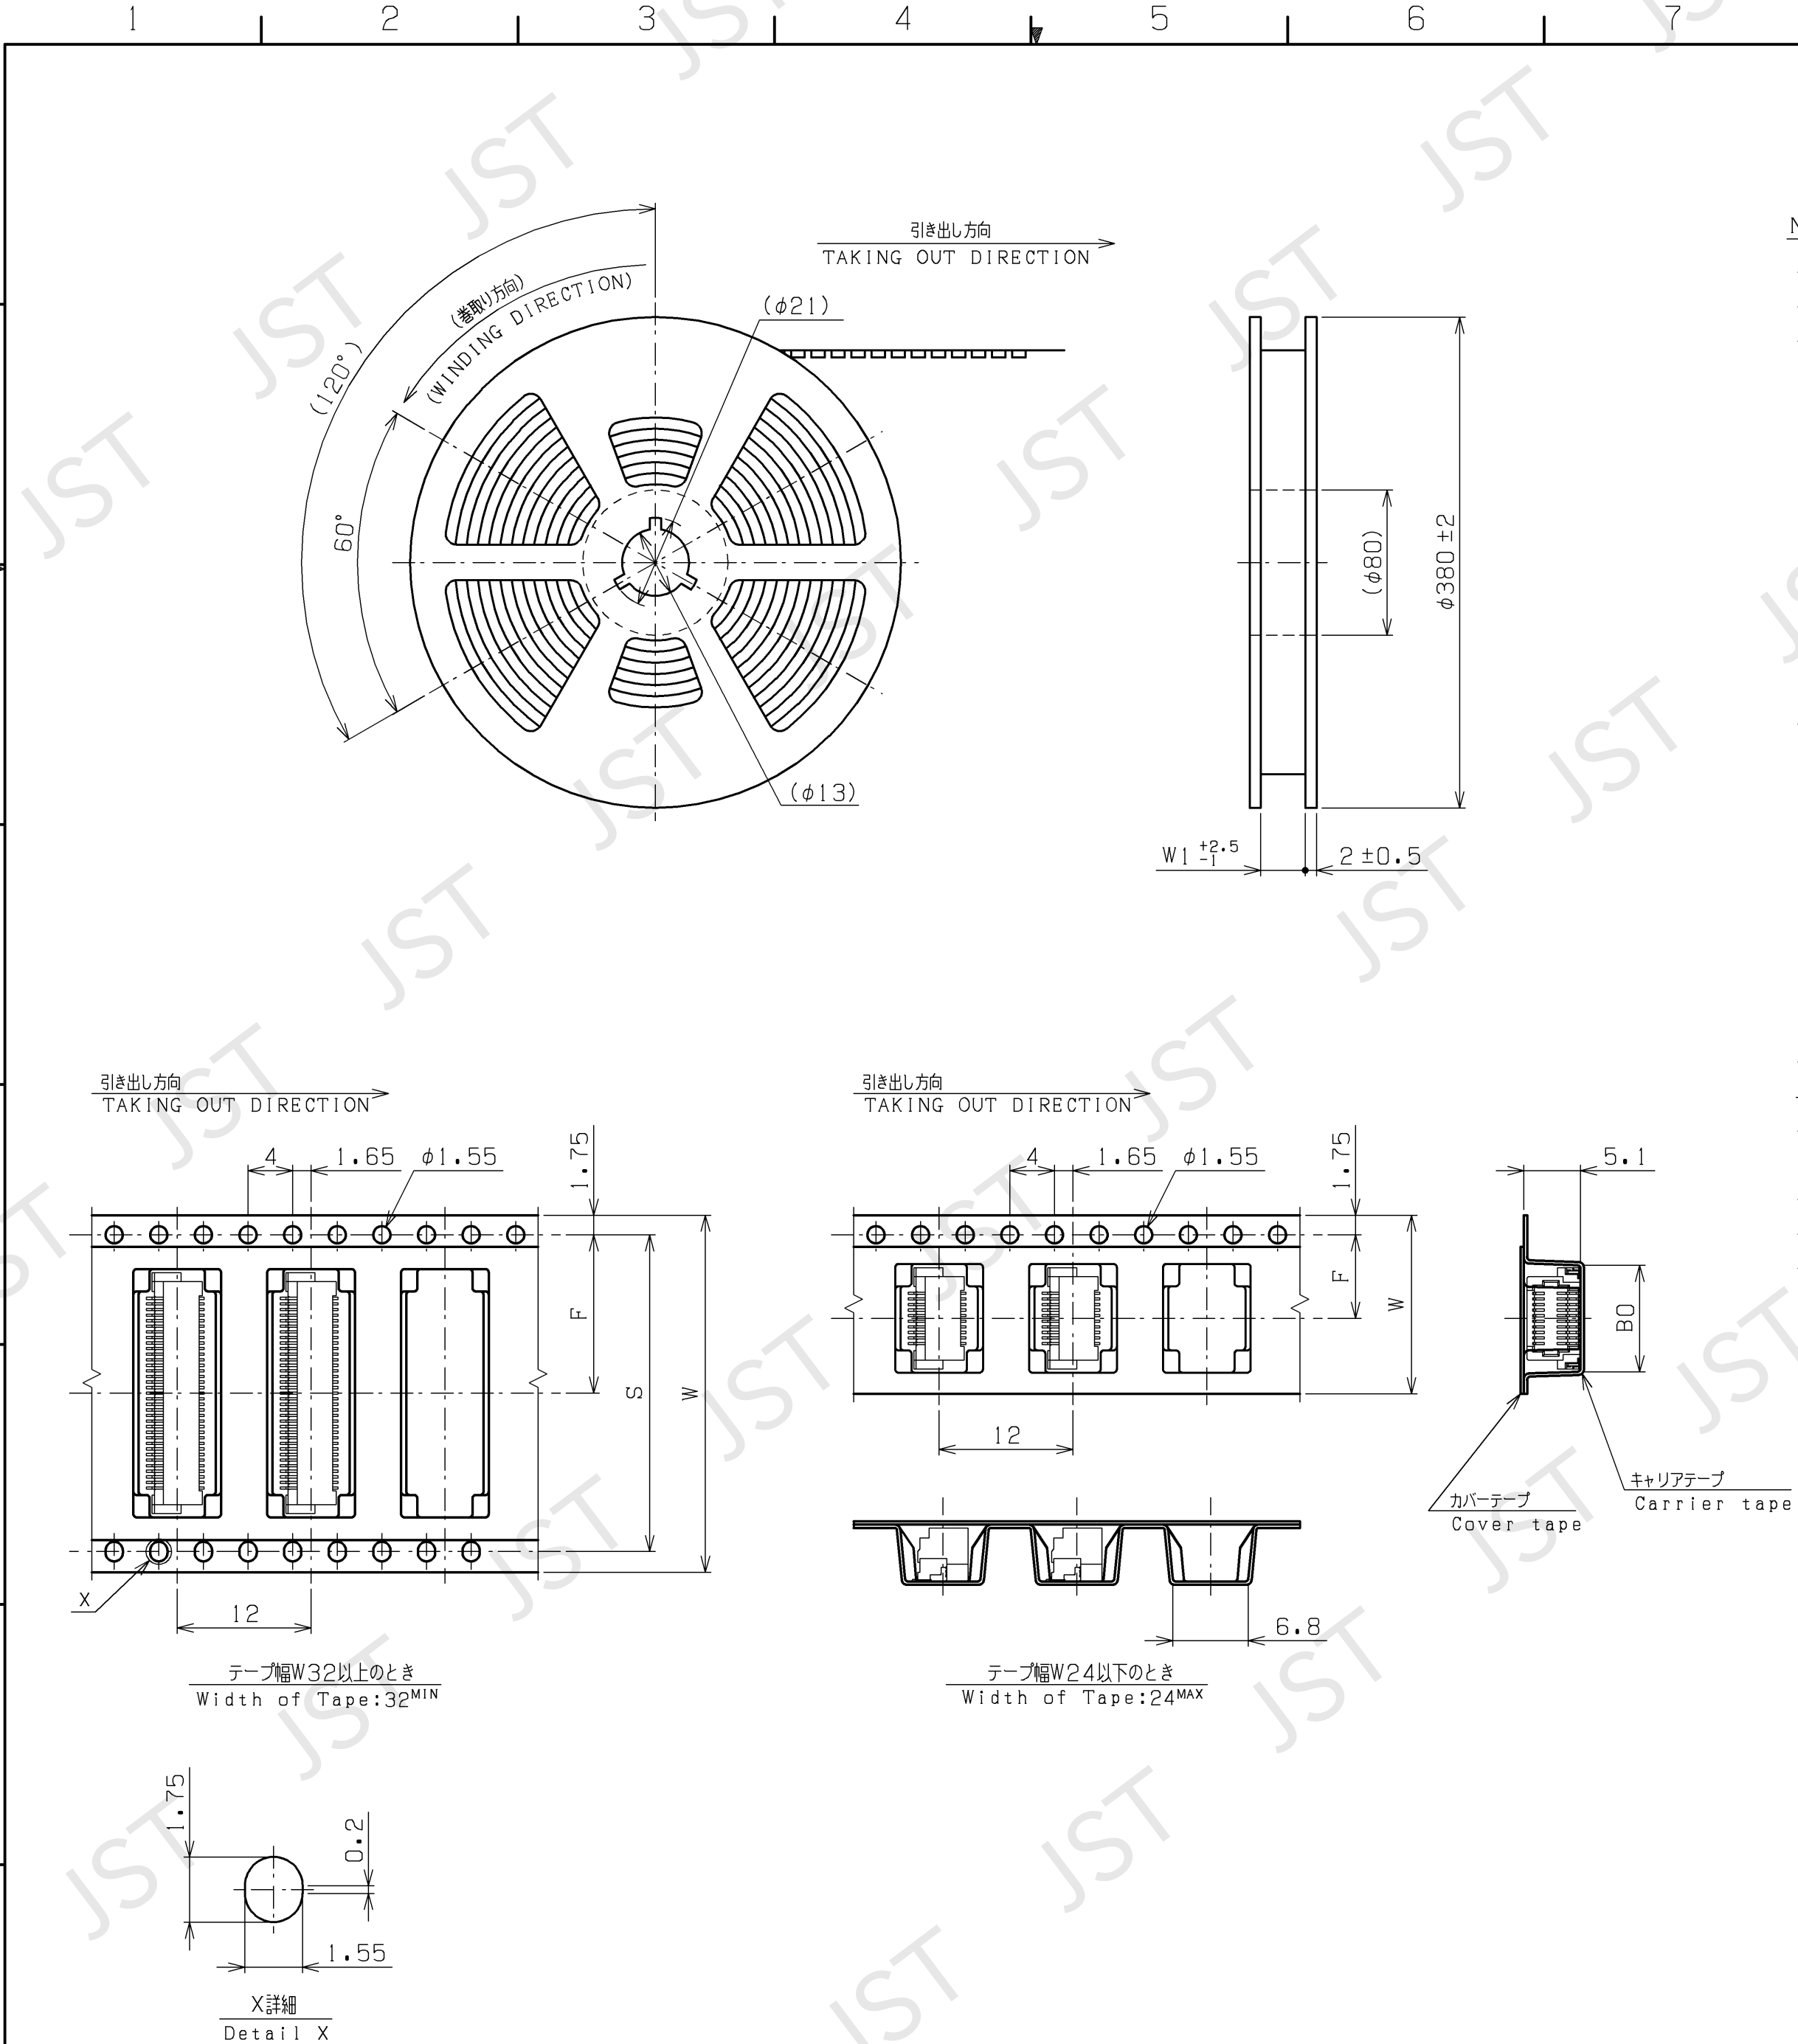


NOTE

1. コネクタ本体については単体の別図面を参照ください。
2. 梱包数量：1500個/リール。
3. リードテープ長さ

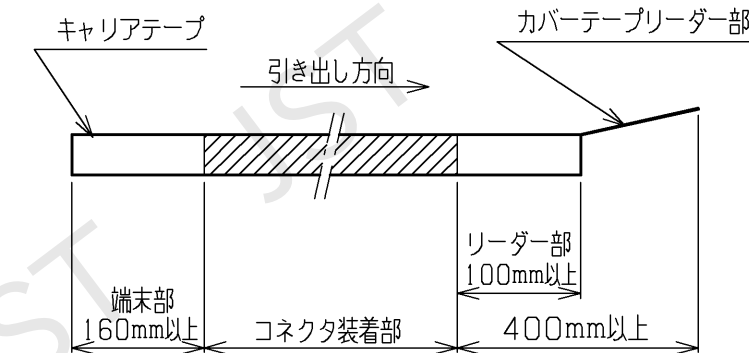

4. カバーテープの剥離強度：0.1~1N (剥離速度300mm/分)

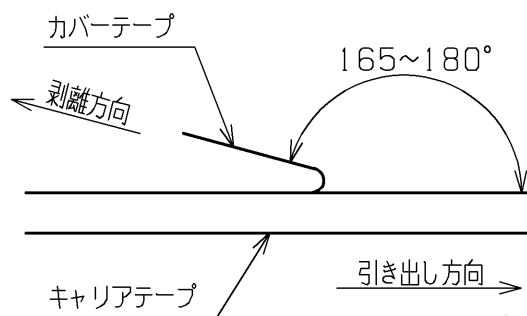

5. 材料：キャリアテープ：ポリエステル (PET)

ポリスチレン (PS)

カバーテープ：ポリエステル (PET)

リール：フランジ部-ポリスチレン (PS)


コア部-ポリプロピレン (PP)

ポリスチレン (PS)


6. 指定公差：±0.3

NOTE

1. Connector part: See the DWG. of header for JMD connector.
2. Quantity to be packaged: 1500 pcs/reel
3. Leading tape length.

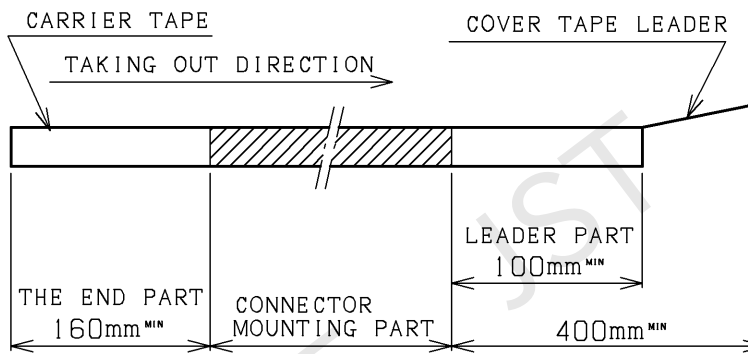

4. Cover tape peel strength: 0.1~1N (Peel speed: 300mm/minute)

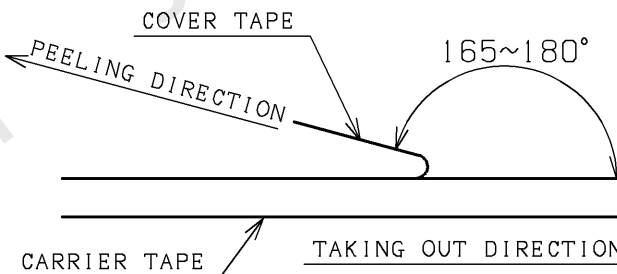

5. Material: Carrier tape; Polyester (PET)

Polystyrene (PS)

Cover tape; Polyester (PET)

Reel; Flange; Polystyrene (PS)

Core; Polypropylene (PP)

Polystyrene (PS)

6. Unless otherwise specified, tolerances are ±0.3

極数 Circuits	寸法/Dimensions				
	B0	F	S	W	W1
20	9.45	7.5	-	16	17.5
30	11.95	11.5	-	24	25.5
40	14.45	11.5	-	24	25.5
50	16.95	11.5	-	24	25.5
60	19.45	14.2	28.4	32	33.5
70	21.95	14.2	28.4	32	33.5
80	24.45	20.2	40.4	44	45.5
100	29.45	20.2	40.4	44	45.5

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC		MAY. 27, 2024	
JST 日本圧着端子製造株式会社 J.S.T. MFG. CO., LTD.		尺度 SCALE	品名 SERIES NAME	JMDコネクタ サイドプラグ用エンボステープ JMD CONNECTOR EMBOSS TAPE FOR SIDE PLUG
		2:1	形番 PART No.	() PS-JMDSS-G-1-TF (LF) (SN)
		図番 DRAWING No.	KRD-33772-2	RO