


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

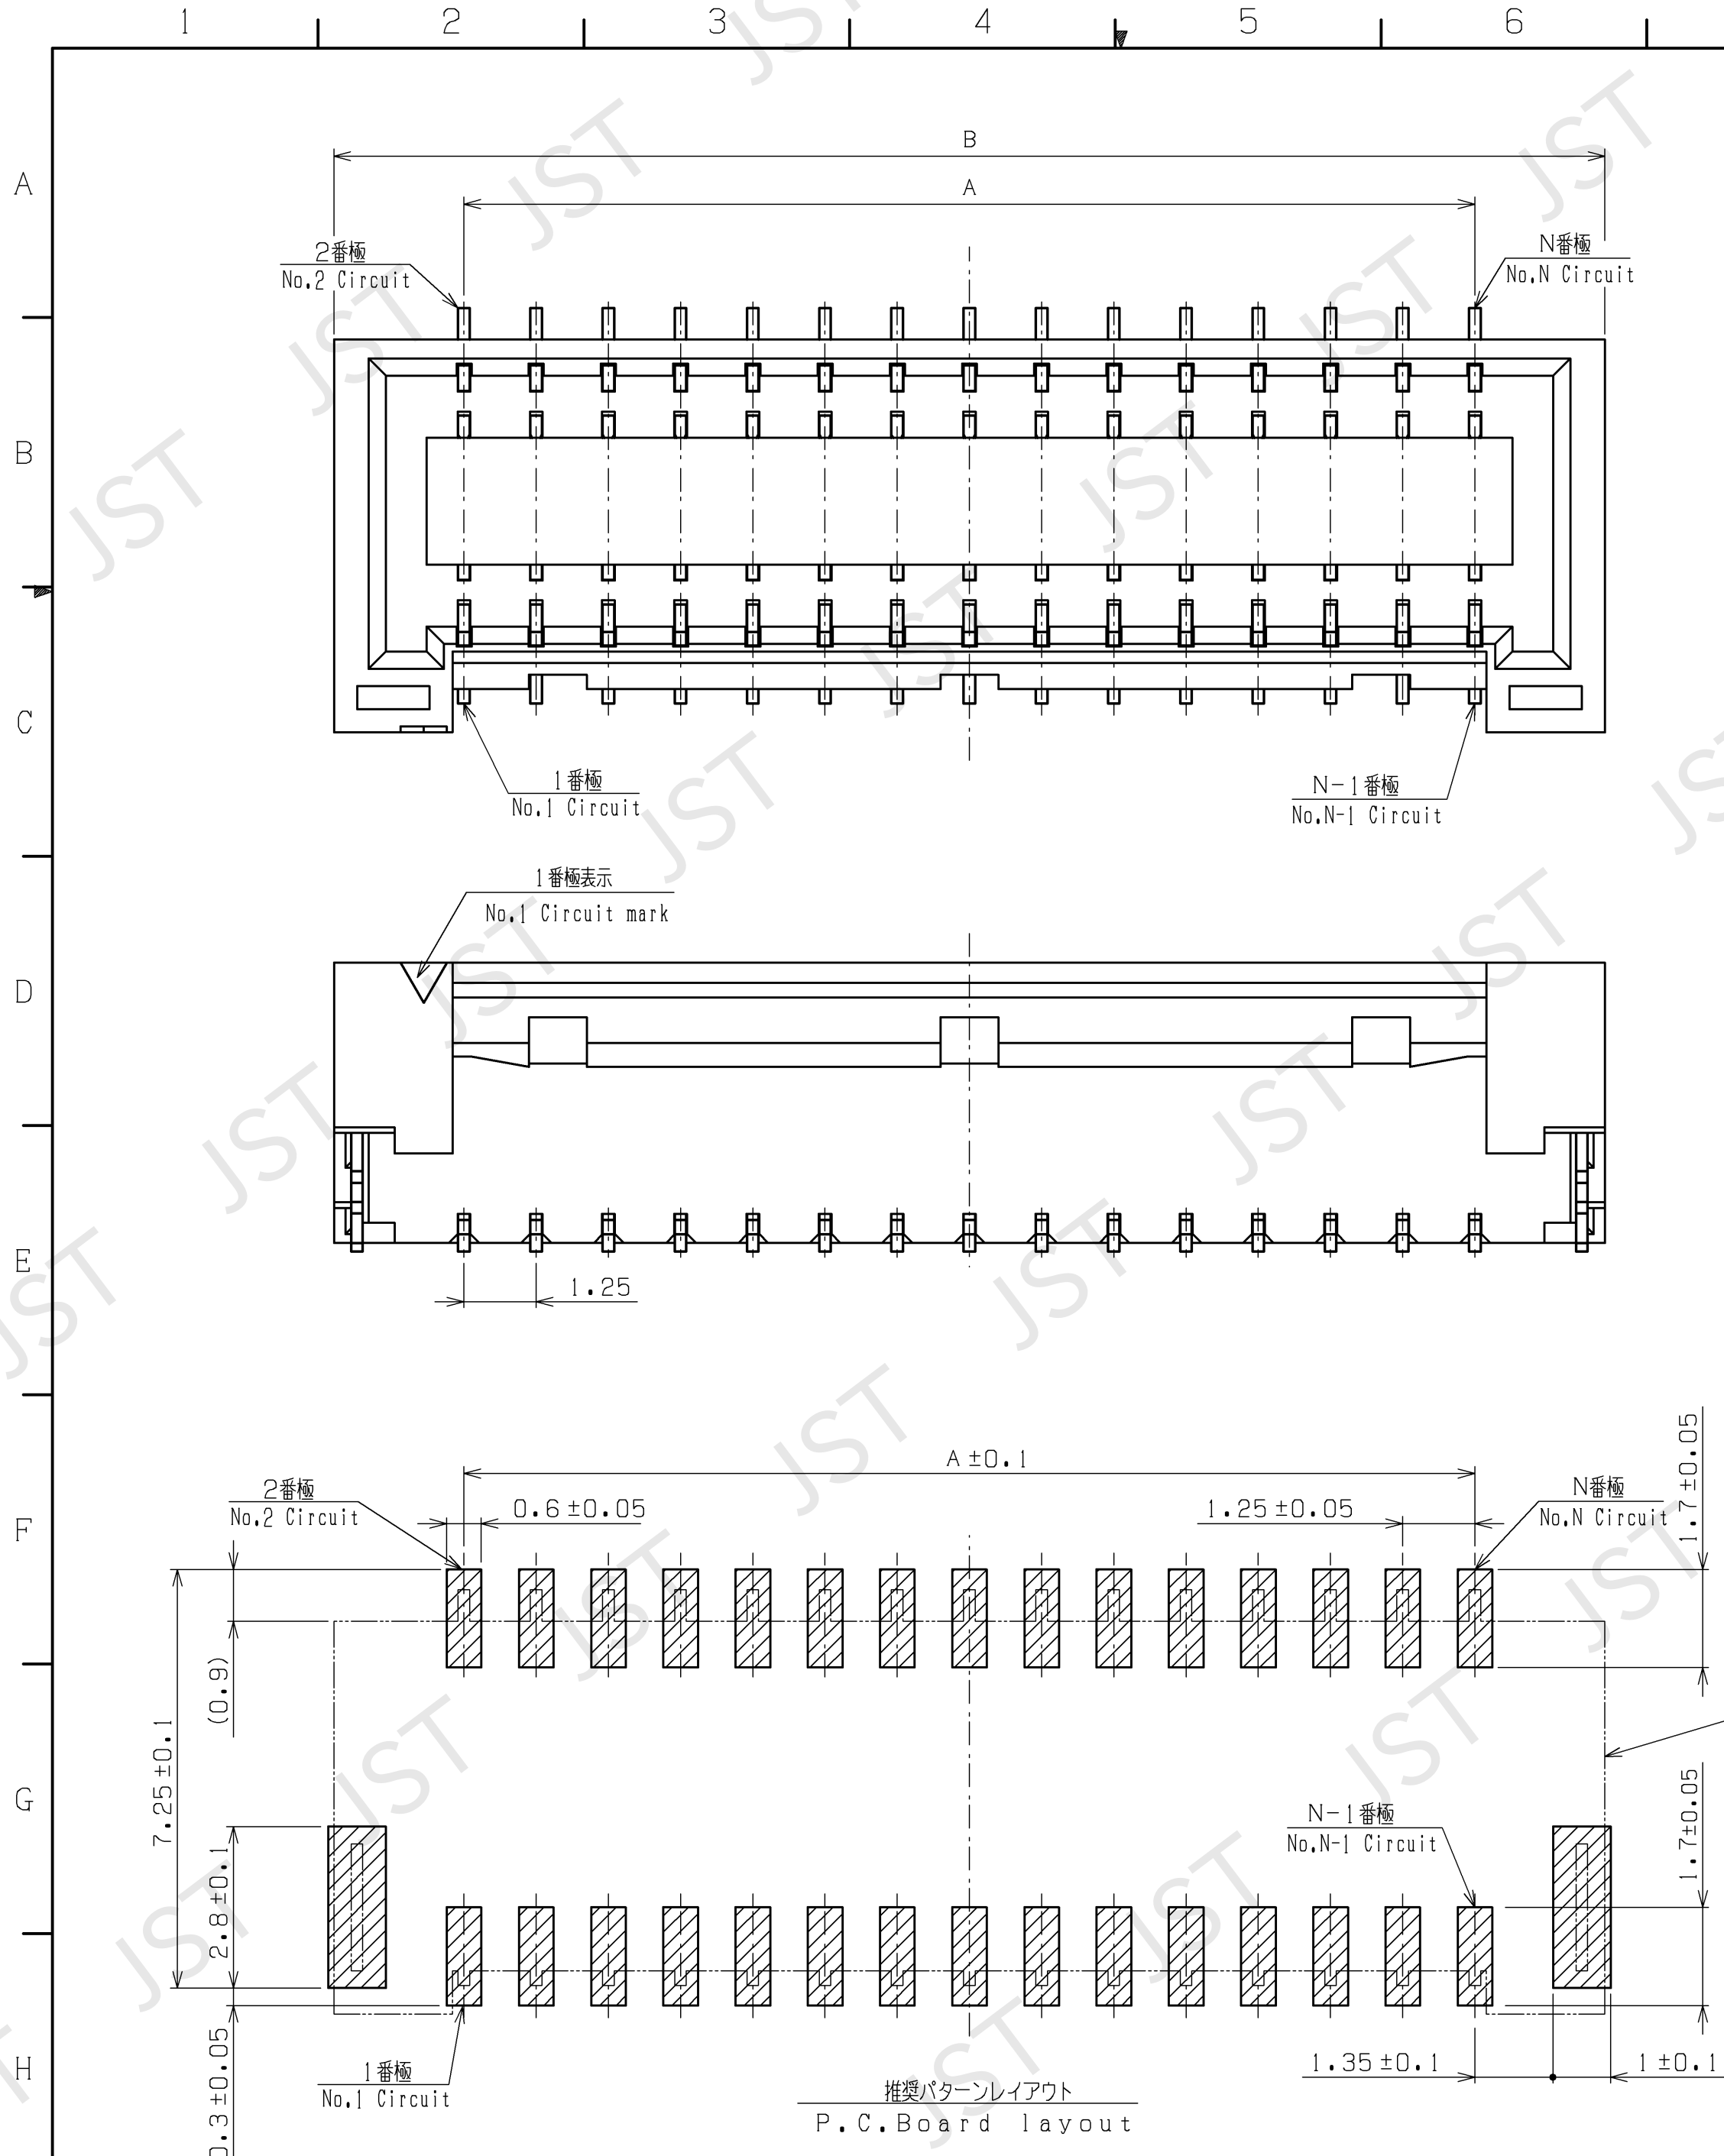

極数 Cir- cuits	寸法/Dimension		極数 Cir- cuits	寸法/Dimension	
	A	B		A	B
16	8.75	13.25	30	17.50	22.00
18	10.00	14.50	32	18.75	23.25
20	11.25	15.75			
22	12.50	17.00	36	21.25	25.75
24	13.75	18.25	38	22.50	27.00
26	15.00	19.50	40	23.75	28.25
28	16.25	20.75			

NOTE



1. 指定公差 : ±0.3

2. 基板パターン寸法は、公差が累積しないこと。

NOTE

1. Unless otherwise specified, tolerances are ±0.3

2. Tolerance of pattern pitch on PCB are not cumulative.

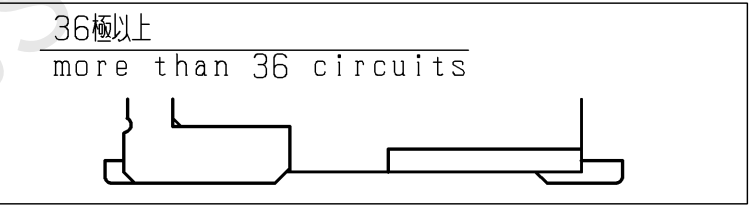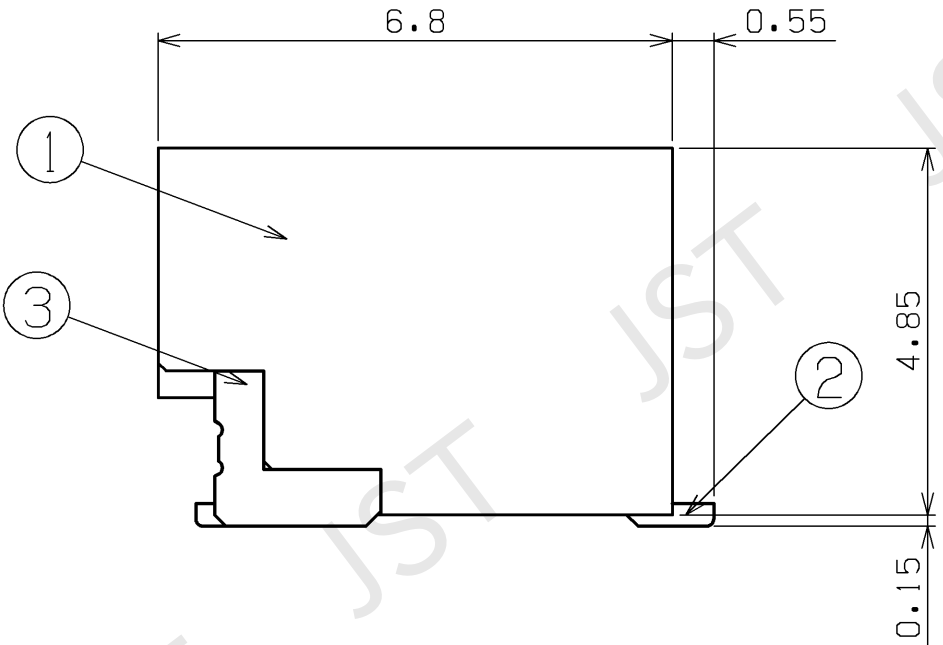


コネクタ外形
OUTLINE OF CONNECTOR



3	補強タブ REINFORCEMENT	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
2	コンタクト CONTACT	銅合金 COPPER ALLOY	金めっき GOLD PLATED	
1	ハウジング HOUSING	PA (耐熱性) PA (HEAT RESISTANCE)		ナチュラル NATURAL UL94V-0
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC	10:1	JUN. 04, 2024	
		尺度 SCALE	品名 SERIES NAME	
		10:1	GHDコネクタ トップベース (16~40極) GHD CONNECTOR TOP BASE (16~40PIN)	
			形番 PART No.	
			BM () B-GHDS-G (LF) (SN)	
			図番 DRAWING No.	
			KRD-45228-3	RO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E
F
G
H

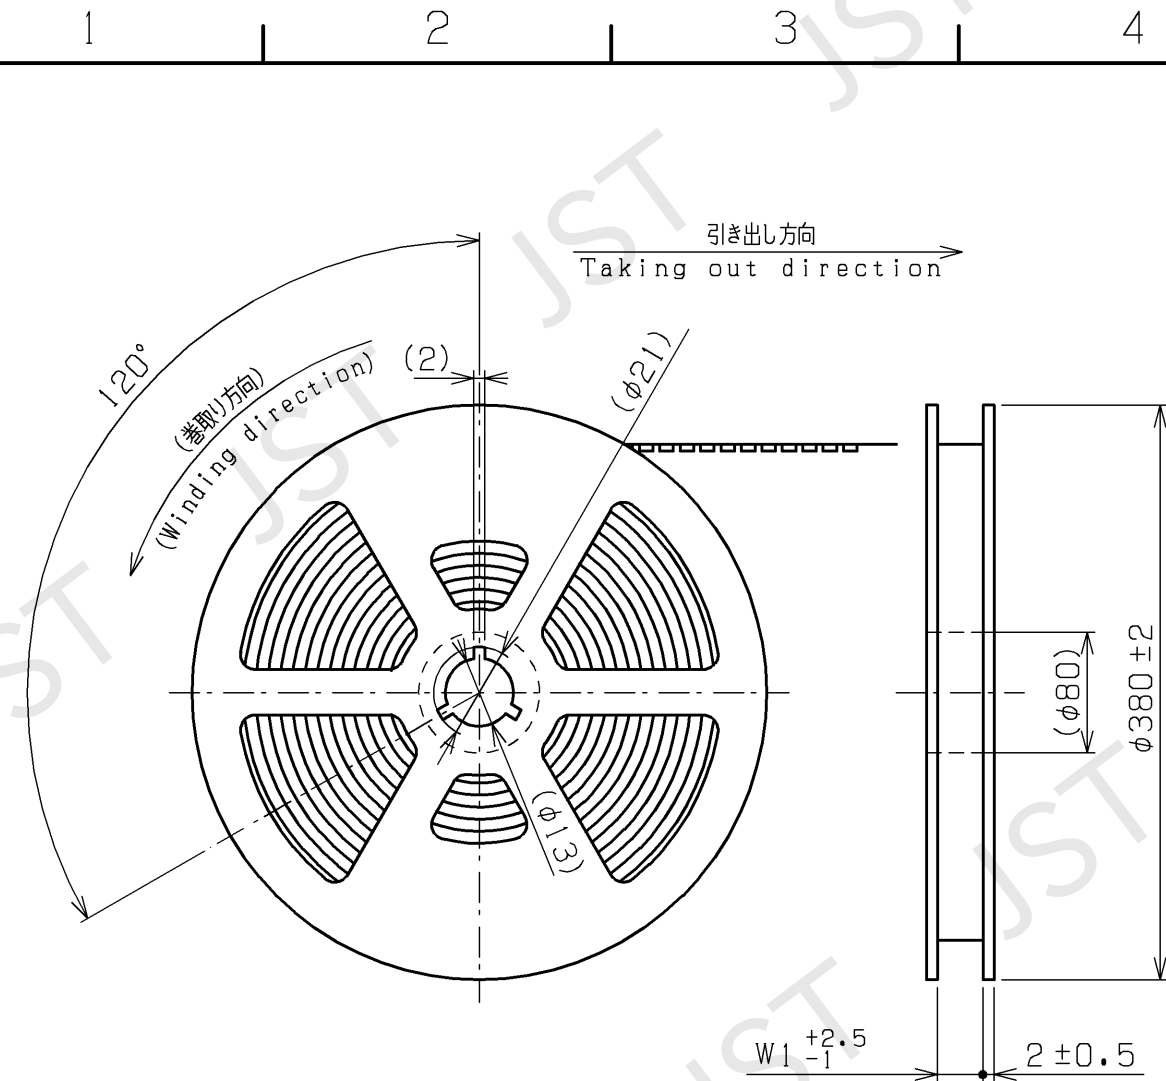


極数 Circuits	寸法/Dimensions				
	B0	F	S	W	W1
10	9.85	11.5	-	24.0	25.5
12	11.10	11.5	-	24.0	25.5
14	12.35	11.5	-	24.0	25.5
16	13.60	11.5	-	24.0	25.5
18	14.85	11.5	-	24.0	25.5
20	16.10	11.5	-	24.0	25.5
22	17.35	14.2	28.4	32.0	33.5
24	18.60	14.2	28.4	32.0	33.5
26	19.85	14.2	28.4	32.0	33.5
28	21.10	14.2	28.4	32.0	33.5
30	22.35	20.2	40.4	44.0	45.5
32	23.60	20.2	40.4	44.0	45.5
36	26.10	20.2	40.4	44.0	45.5
38	27.35	20.2	40.4	44.0	45.5
40	28.60	20.2	40.4	44.0	45.5

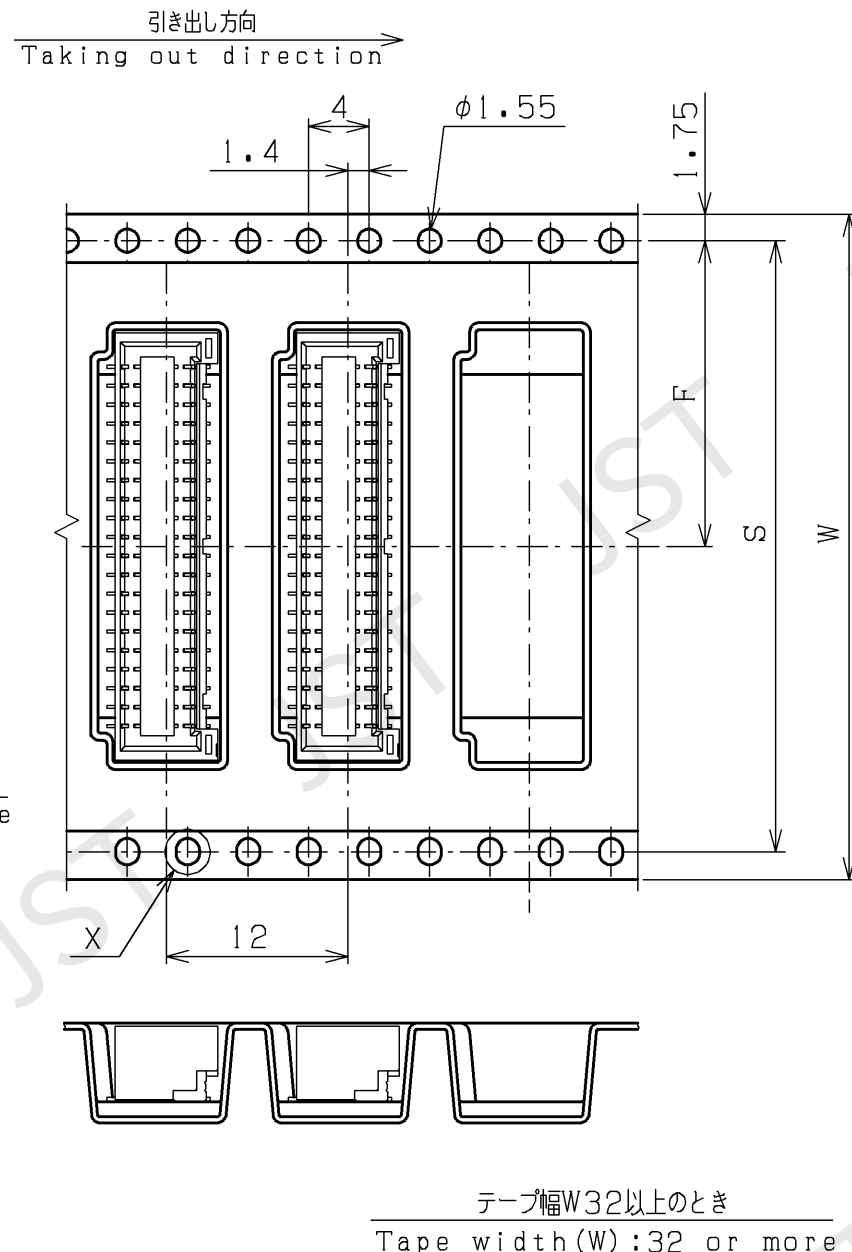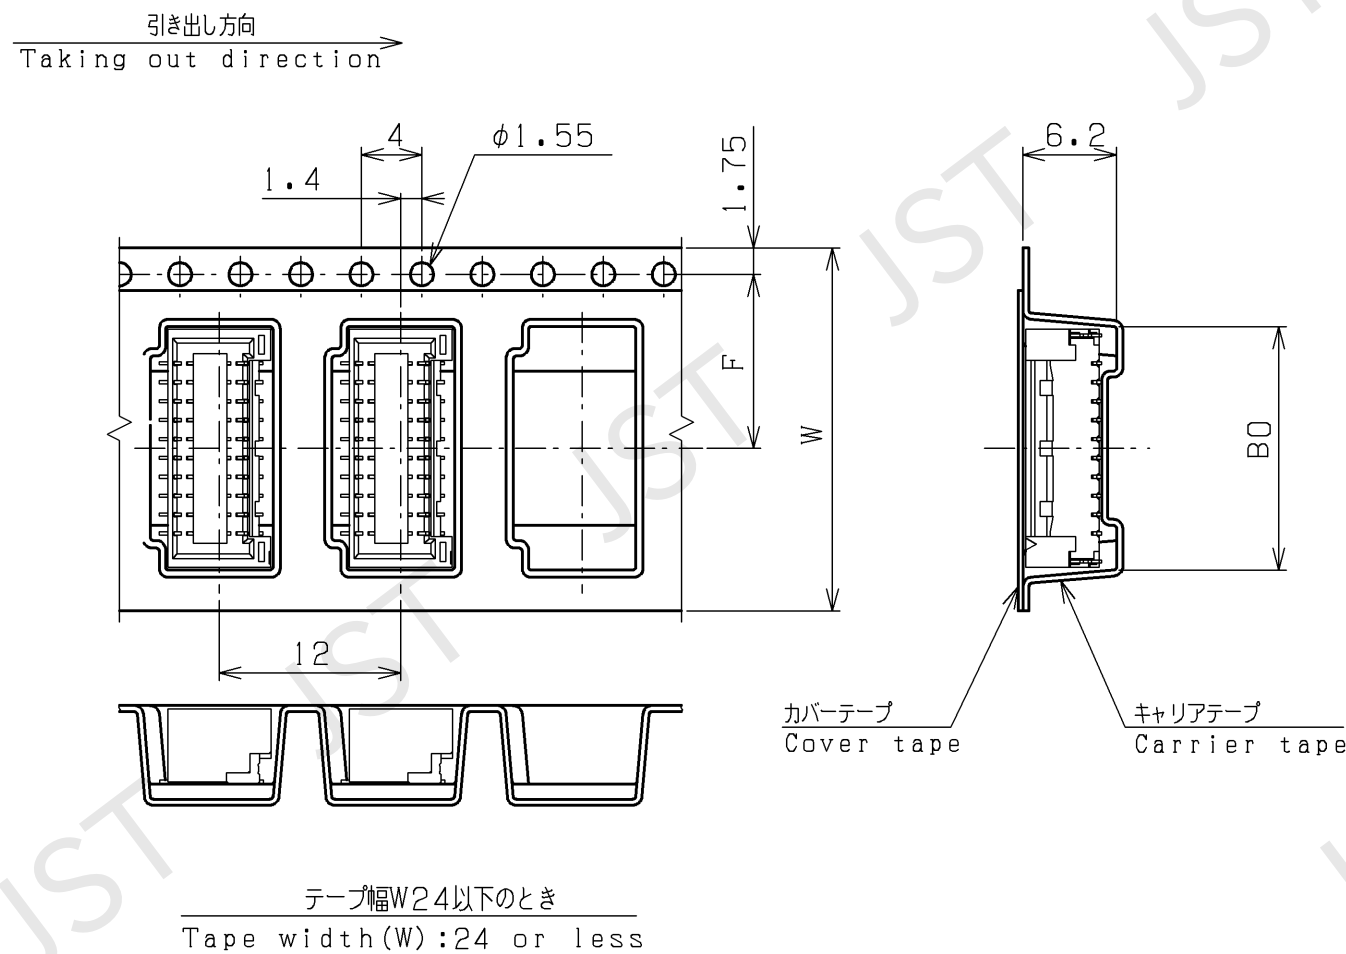


NOTE

1. コネクタ本体については単体の別図面を参照ください。
2. 極包数量：1250個/リール。
3. リードテープ長さ

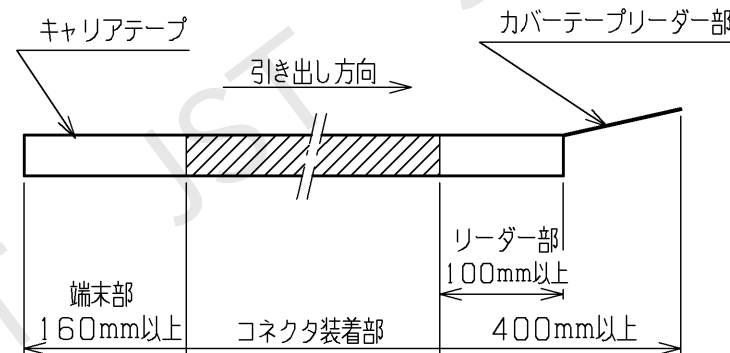

4. カバーテープの剥離強度：0.1～1N

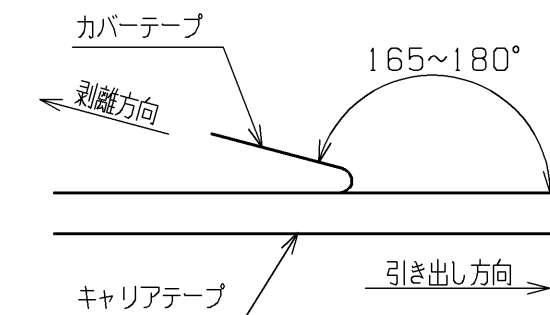

5. 材料：キャリアテープ：ポリエステル (PET)

：ポリスチレン (PS)

カバーテープ：ポリエステル (PET)

リール：フランジ部：ポリスチレン (PS)


：コア部：ポリプロピレン (PP)

ポリスチレン (PS)


6. 指定公差：±0.3

NOTE

1. Connector part: See the DWG. of GHD connector.
2. Quantity to be packaged: 1250 pcs/reel
3. Leading tape length.

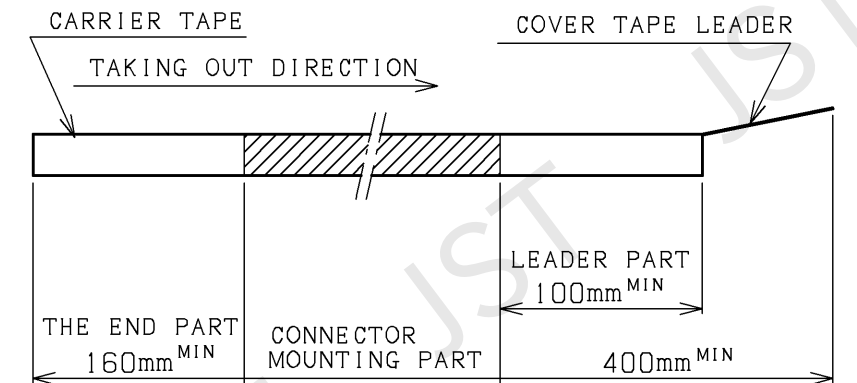

4. Cover tape peel strength: 0.1～1N

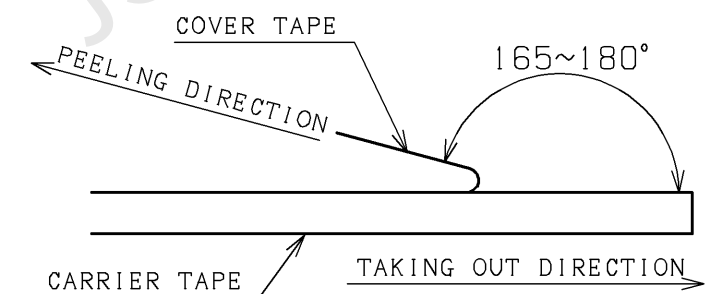

5. Material: Carrier tape: Polyester (PET)

：Polystyrene (PS)


Cover tape：Polyester (PET)

Reel; Flange：Polystyrene (PS)

Core：Polypropylene (PP)

：Polystyrene (PS)

6. Unless otherwise specified, tolerances are ±0.3

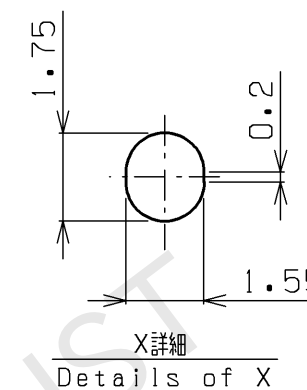

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC		JUN. 04, 2024	品名 SERIES NAME
				GHDコネクタ トップベース用インボステープ
				GHD CONNECTOR EMBOSS TAPE FOR TOP BASE
				形番 PART No.
日本圧着端子製造株式会社 J.S.T. MFG. CO., LTD.				BM () B-GHDS-G-TF (LF) (SN)
図番 DRAWING No.				KRD-45229-2 RO