



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

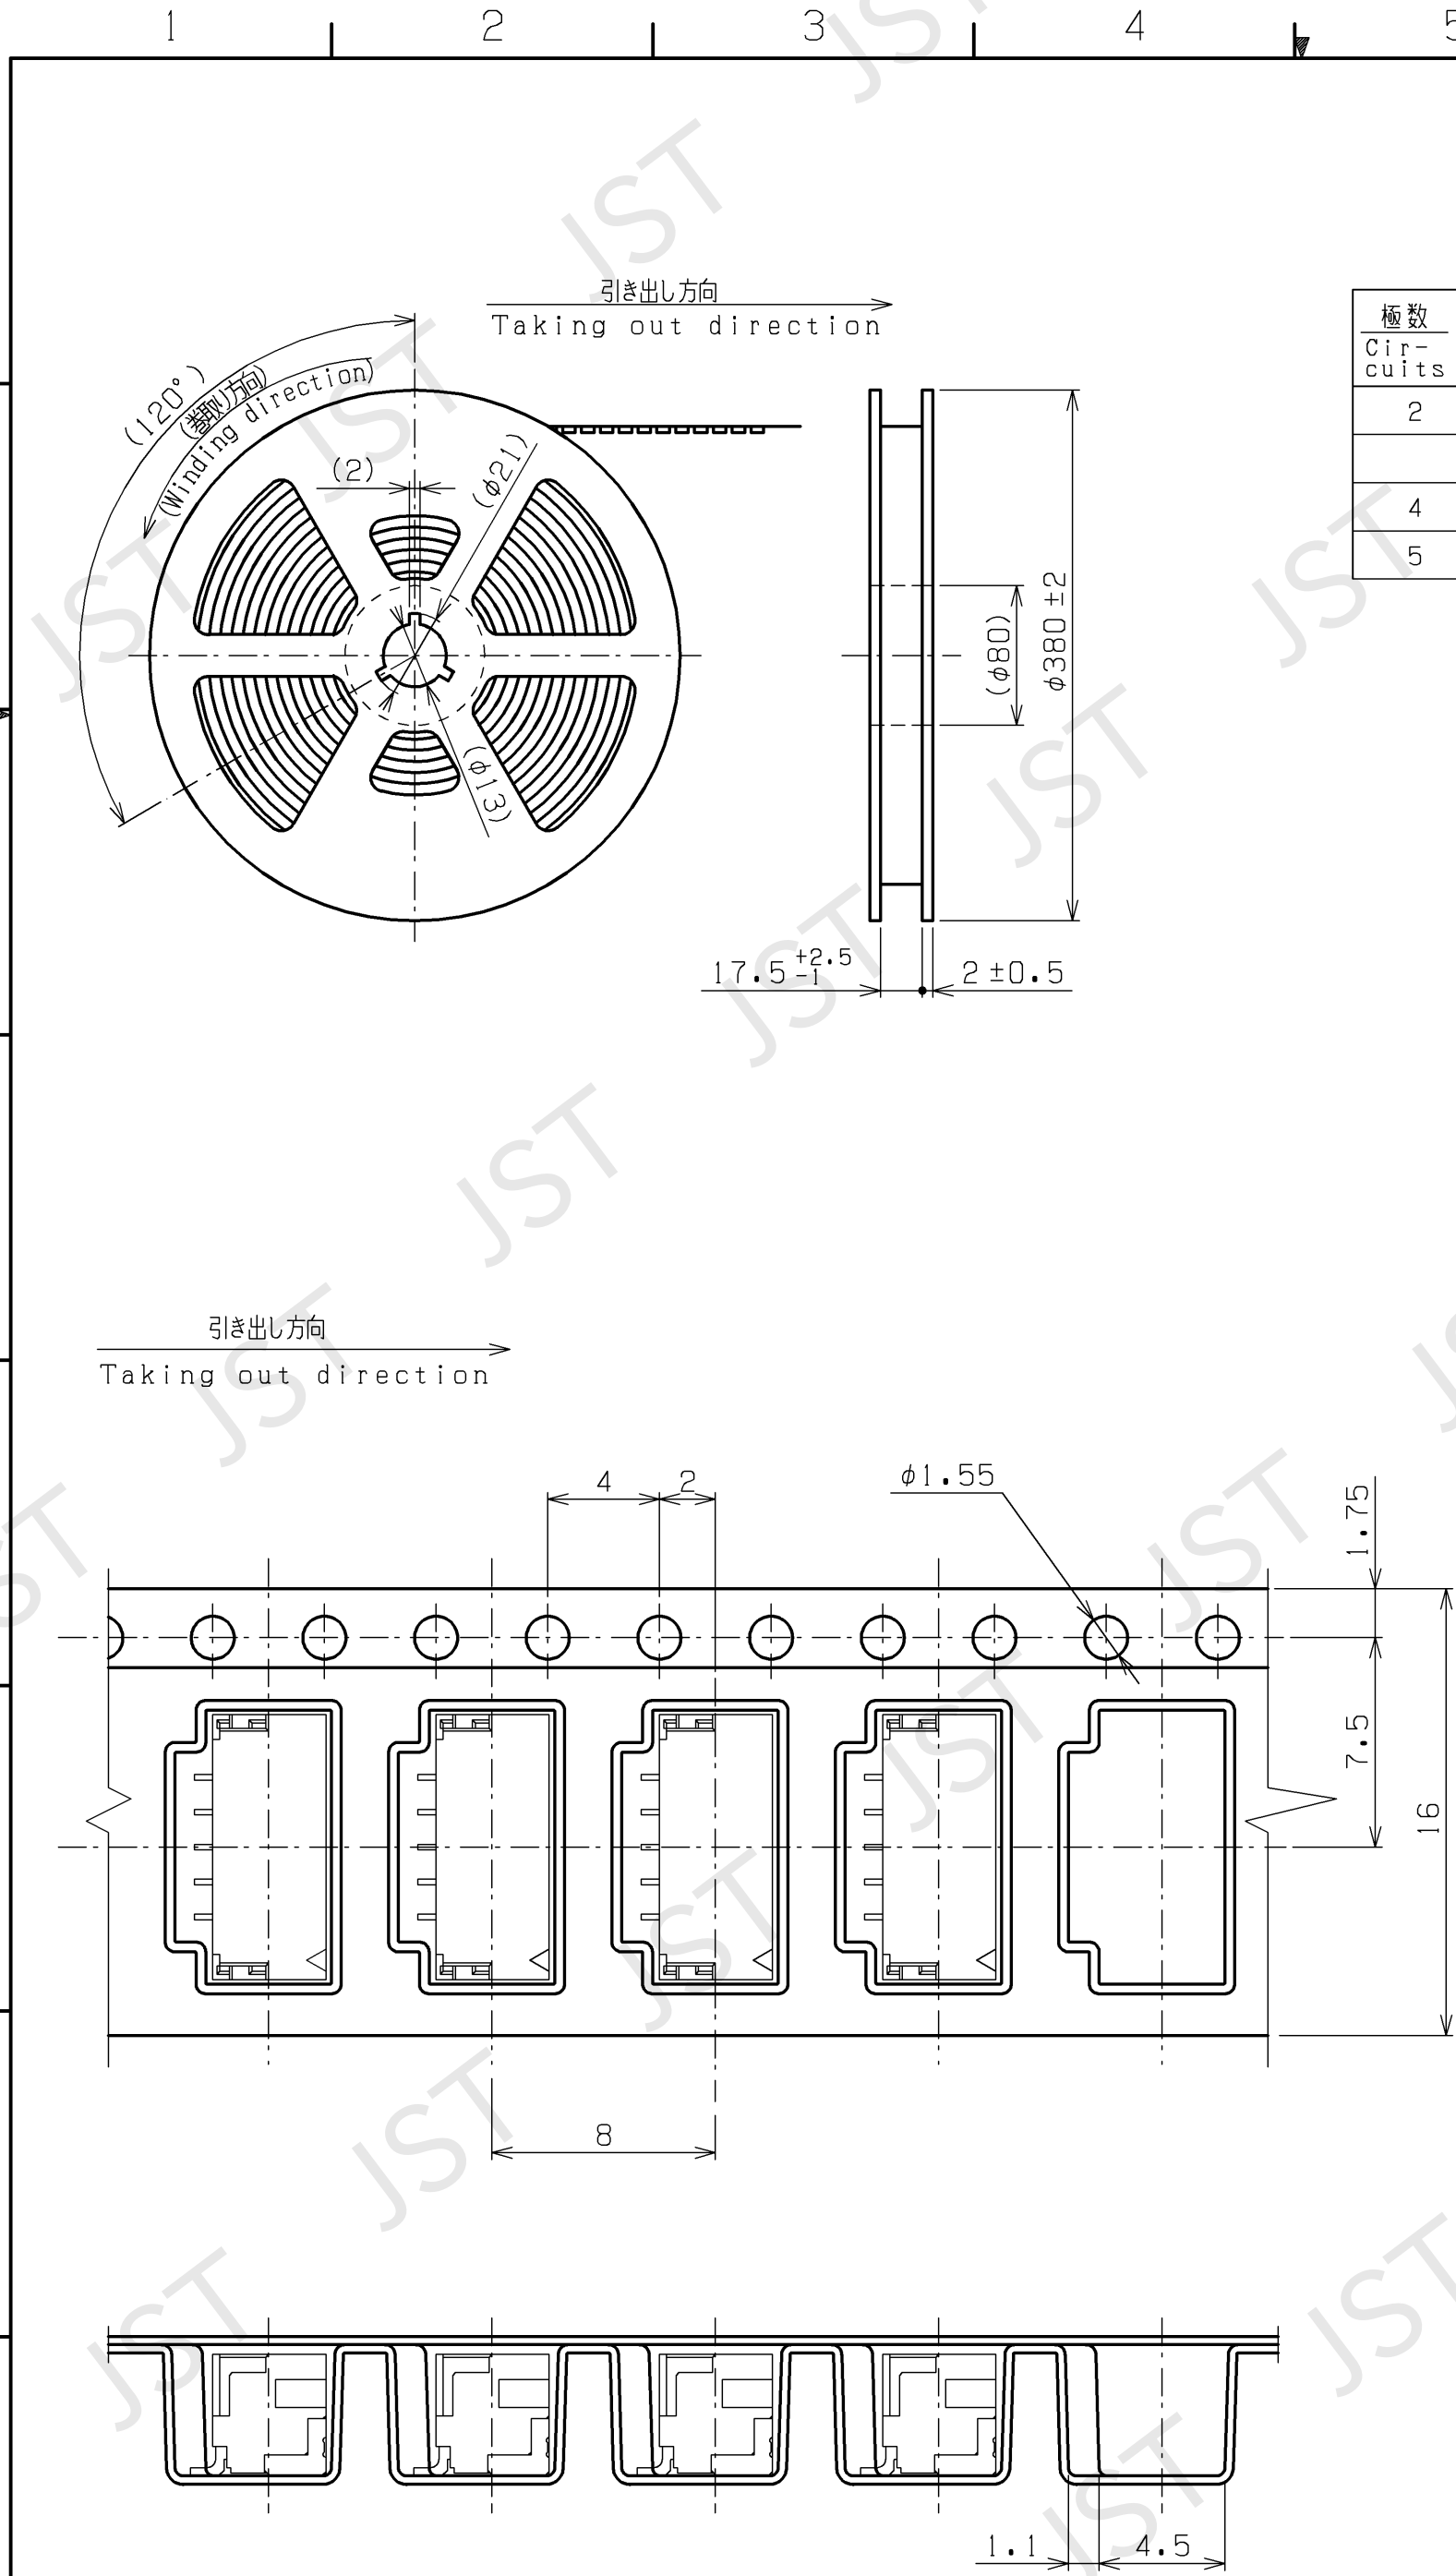


極数 Circuits	寸法/Dimensions
2	6.0
4	8.5
5	9.8

NOTE

- 1. コネクタ本体については、単体の別図面を参照ください。
- 2. 梱包数量：2500個/リール。
- 3. リードテープ長さ

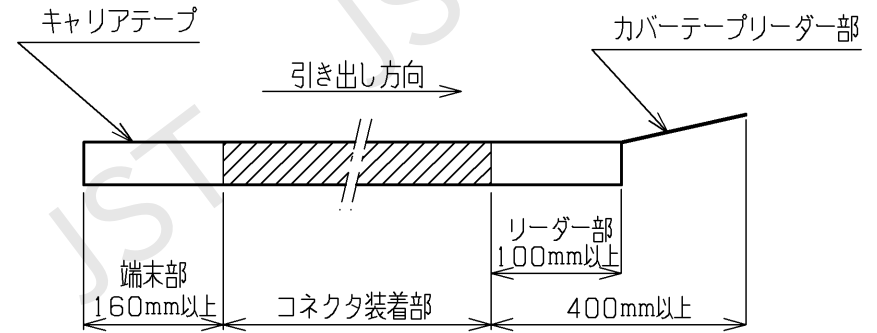


4. カバーテープの剥離強度：0.1~1N (剥離速度300mm/分)

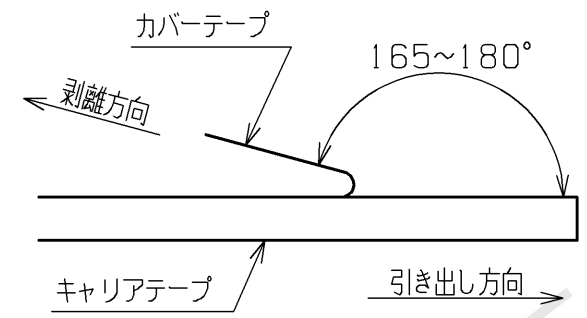


- 5. 材料：キャリアテープ：ポリエステル (PET)
：ポリスチレン (PS)
カバーテープ：ポリエステル (PET)
リール：フランジ部：ポリスチレン (PS)
：コア部：ポリプロピレン (PP)
：ポリスチレン (PS)
- 6. 指定公差： ± 0.3

NOTE

- 1. Connector part: See the DWG. of header for GH connector.
- 2. Quantity to be packaged: 2500pcs/reel
- 3. Leading tape length.

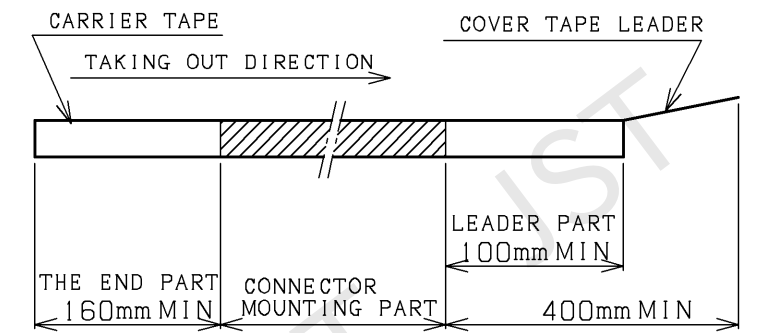

4. Cover tape peel strength: 0.1~1N (Peel speed: 300mm/minute)

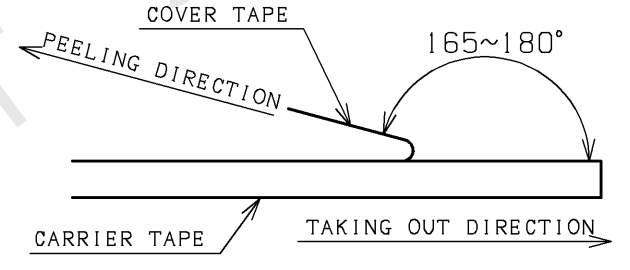

- 5. Material: Carrier tape; Polyester (PET)
; Polystyrene (PS)
Cover tape ; Polyester (PET)
Reel; Flange ; Polystyrene (PS)
Core ; Polypropylene (PP)
Polystyrene (PS)
- 6. Unless otherwise specified, tolerances are ± 0.3

品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A2	METRIC		MAR. 13, 2024	品名 SERIES NAME
JST 日本圧着端子製造株式会社 J.S.T. MFG. CO., LTD.				品名 SERIES NAME
図番 DRAWING No.				形番 PART No.
KRD-55355				SM () B-GHHD-B-TB (LF) (SN)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

