

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR ADAPTED, COPIED, OR PUBLISHED WITHOUT WRITTEN PERMISSION. IN THE EVENT THAT THERE ARISE ANY DOUBTS OR CONTROVERSIES BETWEEN JAPANESE AND ENGLISH EXPRESSION, THE JAPANESE TEXT SHALL PREVAIL.

A
B
C
D
E

1 2 3 4 5 6 7 8

改訂 REV.	変更事項 DESCRIPTIONS	年月日 DATE	0
△			



NOTE

1. 指定公差: ± 0.3
2. 基板の穴ピッチの公差は累積しないこと。

NOTE


1. Unless otherwise specified, tolerances are ± 0.3
2. Tolerance of hole pitch on PCB are not cumulative.

極数 Cir- cuits	A	B
3	5.0	9.9
4	7.5	12.4
5	10.0	14.9
6	12.5	17.4
7	15.0	19.9
8	17.5	22.4
9	20.0	24.9
10	22.5	27.4
11	25.0	29.9
12	27.5	32.4
13	30.0	34.9
14	32.5	37.4
15	35.0	39.9
16	37.5	42.4

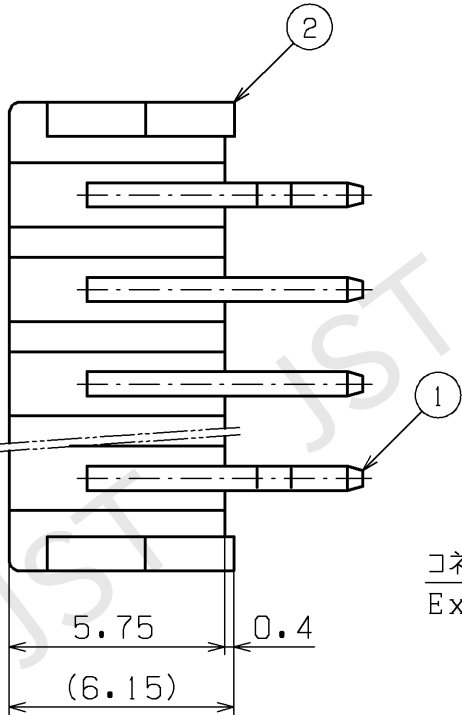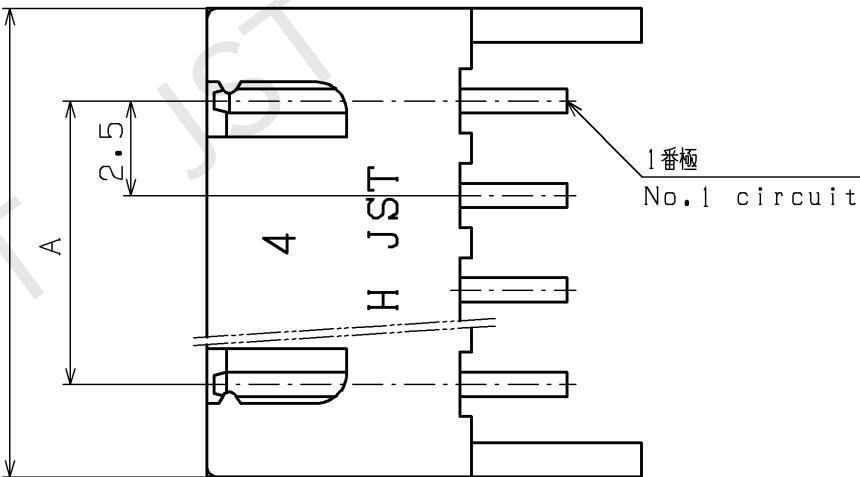


コネクタ外形

External shape
of connector

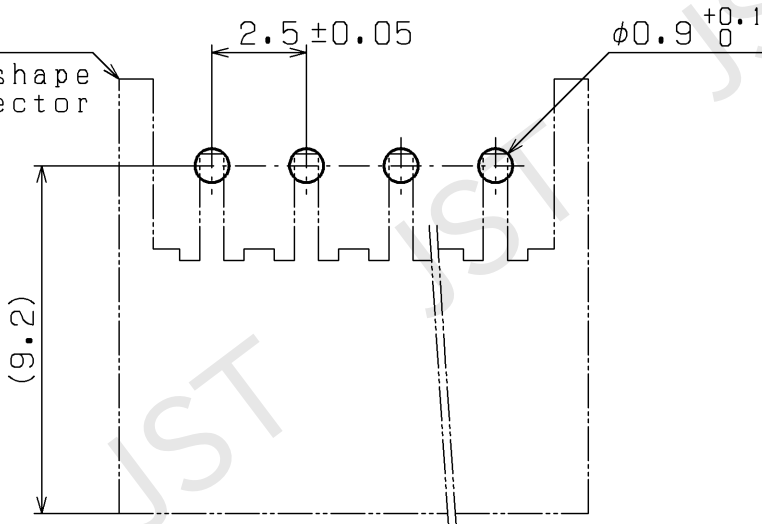

推奨基板穴寸法

Recommendable P.C.Board hole layout

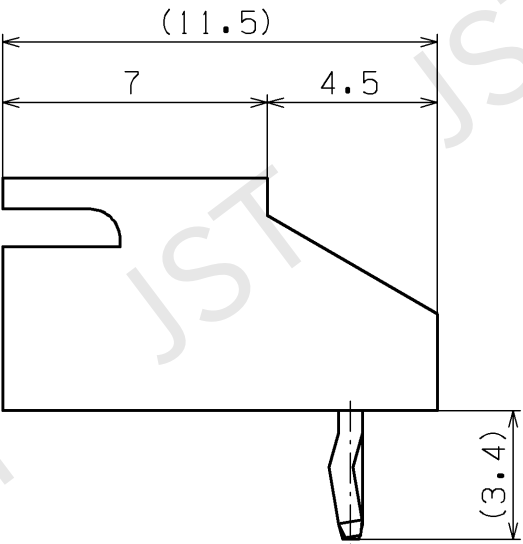

2	ベースハウジング BASE HOUSING	PA		UL94V-0, ナチュラル NATURAL
1	ポスト POST	銅合金 COPPER ALLOY	すずめっき TIN PLATED	
品番 No.	部品名 PART NAME	材質 MATERIAL	処理 SURFACE FINISH	備考 REMARKS
サイズ SIZE	単位 UNIT	投影法 PROJECTION	作図年月日 DATE	納入先 CUSTOMER
A3	METRIC		FEB.15.2024	
日本圧着端子製造株式会社 J.S.T.MFG.CO., LTD.				品名 SERIES NAME
				XH コネクタ XH CONNECTOR
				形番 PART No.
				S () B-XH-A (LF) (SN)
				図番 DRAWING No.
				KRD-34613-3
				R0