
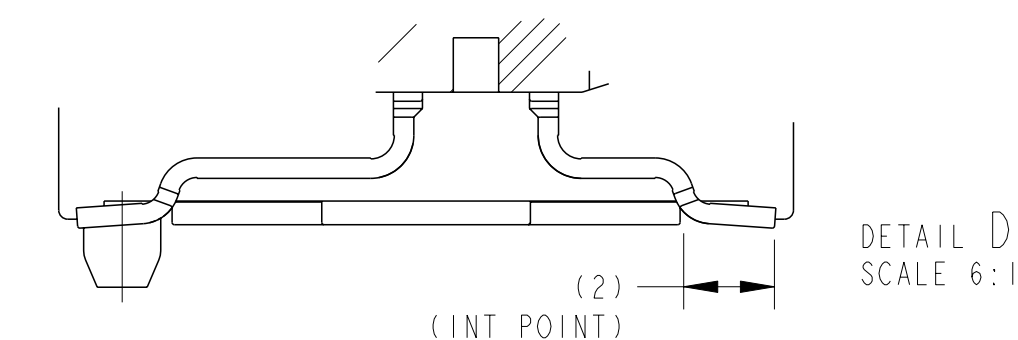
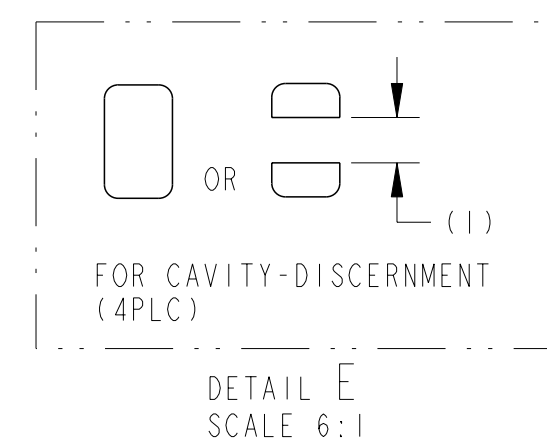


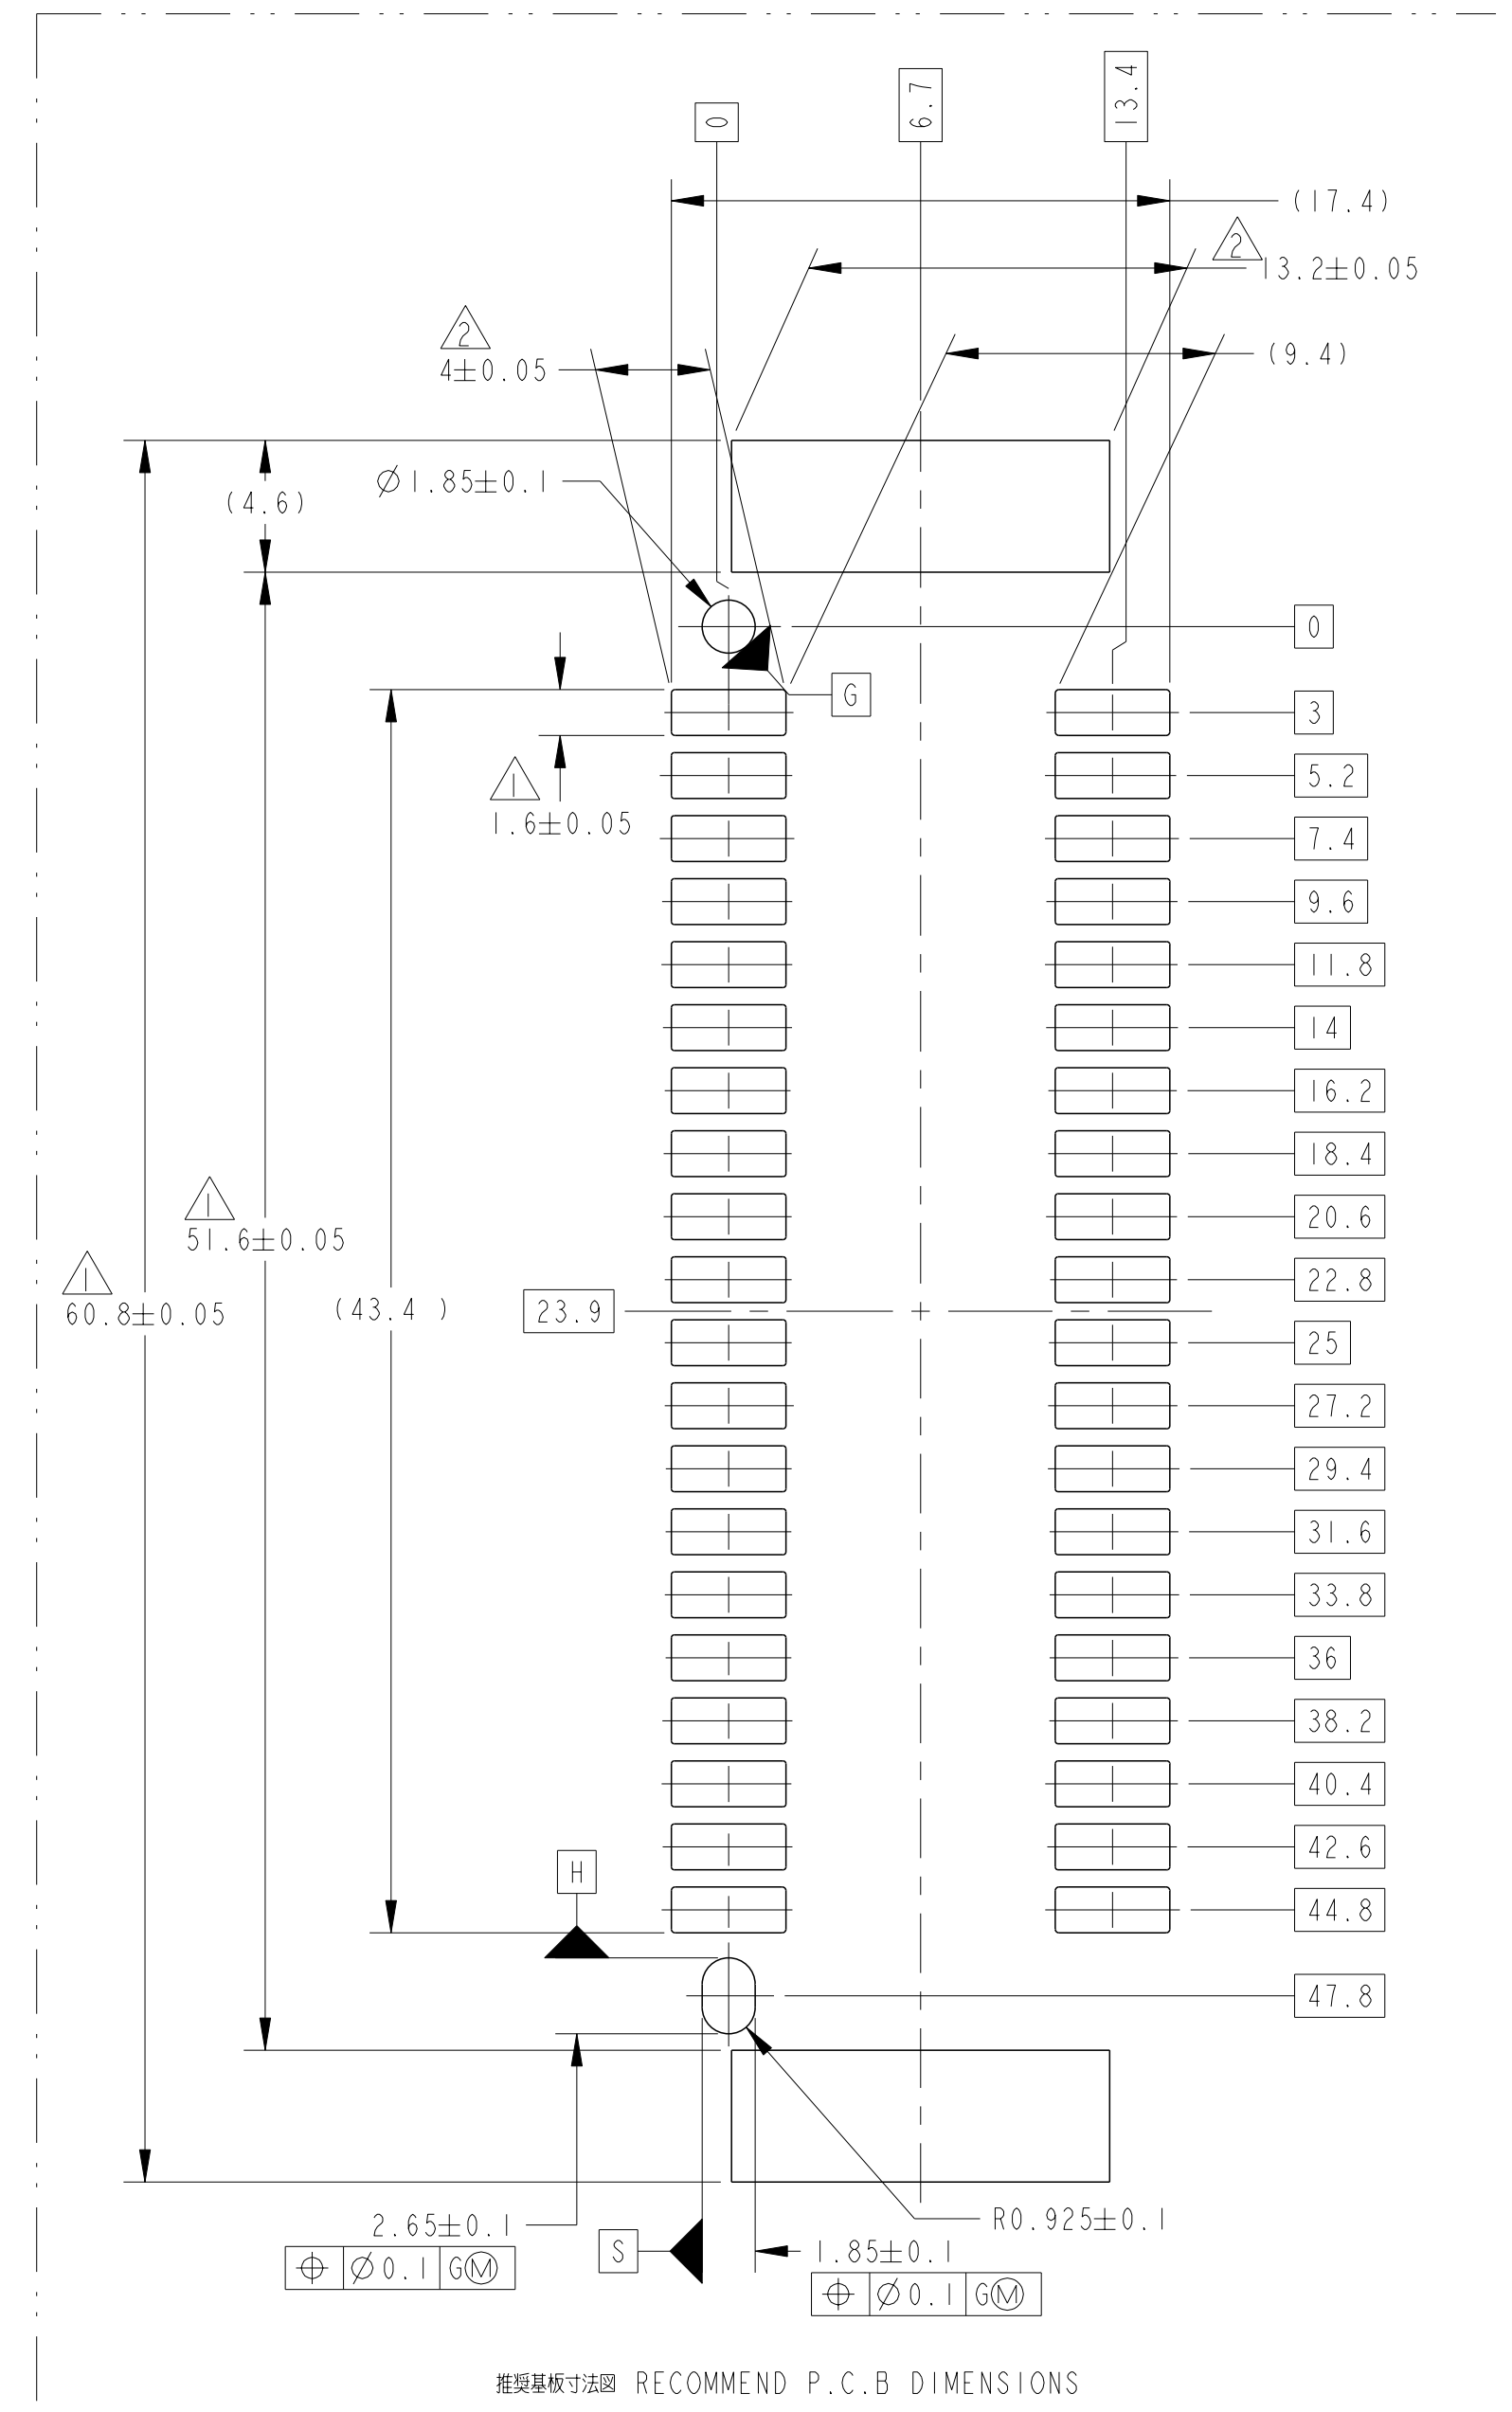

POS. 極数	TYPE	P/N
40	0.64 CRIMP	1318389
40	0.64 III CRIMP	1674312

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. S. IWATANI 21MAR2018 CHK. S. IWATANI 21MAR2018 APP'D. T. KIMURA 21MAR2018		 TE Connectivity	
DIMENSIONS: UNIT: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = 0.3 0-P.L.C. = 0.1 1-P.L.C. = 0.1 2-P.L.C. = 0.001 4-P.L.C. = 0.001 ANGLES = 10-00-01 FINISH 光沢		NAME SIZE 0.64 SMD CONNECTOR 40 POSITION CAP ASSEMBLY V-TYPE	
		PRODUCT SPEC 0.64 SMD 0.64 SMD APPLICATION SPEC 0.64 SMD 0.64 SMD		SIZE CAGE CODE DRAWING NO. A1 00779 C=2321996	
MATERIAL FINISH CONTACT : BRASS		WEIGHT SEE TABLE		RESTRICTED TO	
SEE TABLE		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV. A	