

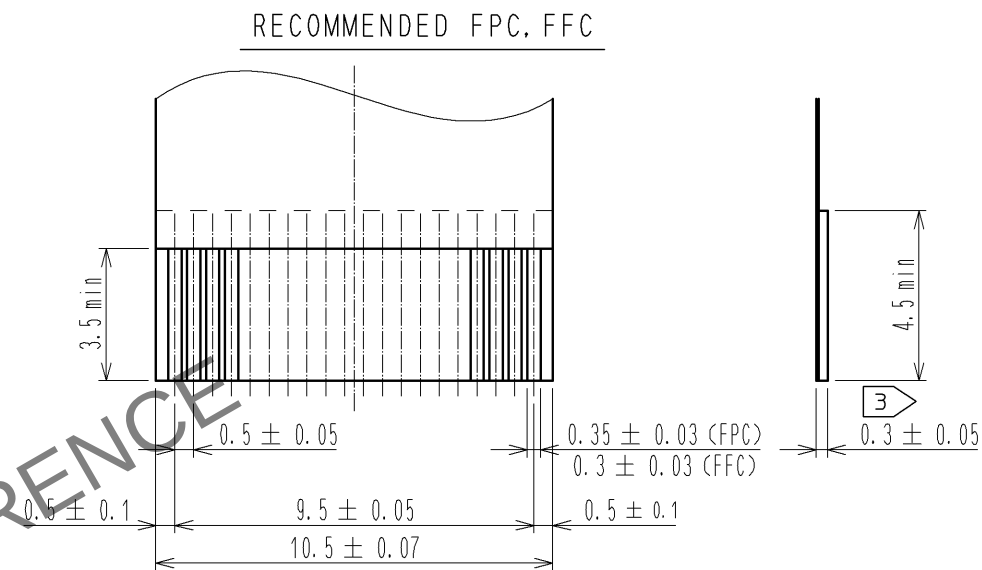
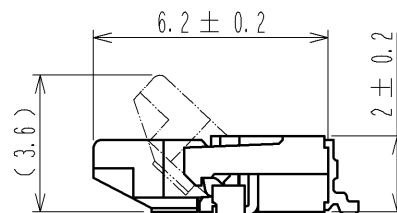


Oct.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

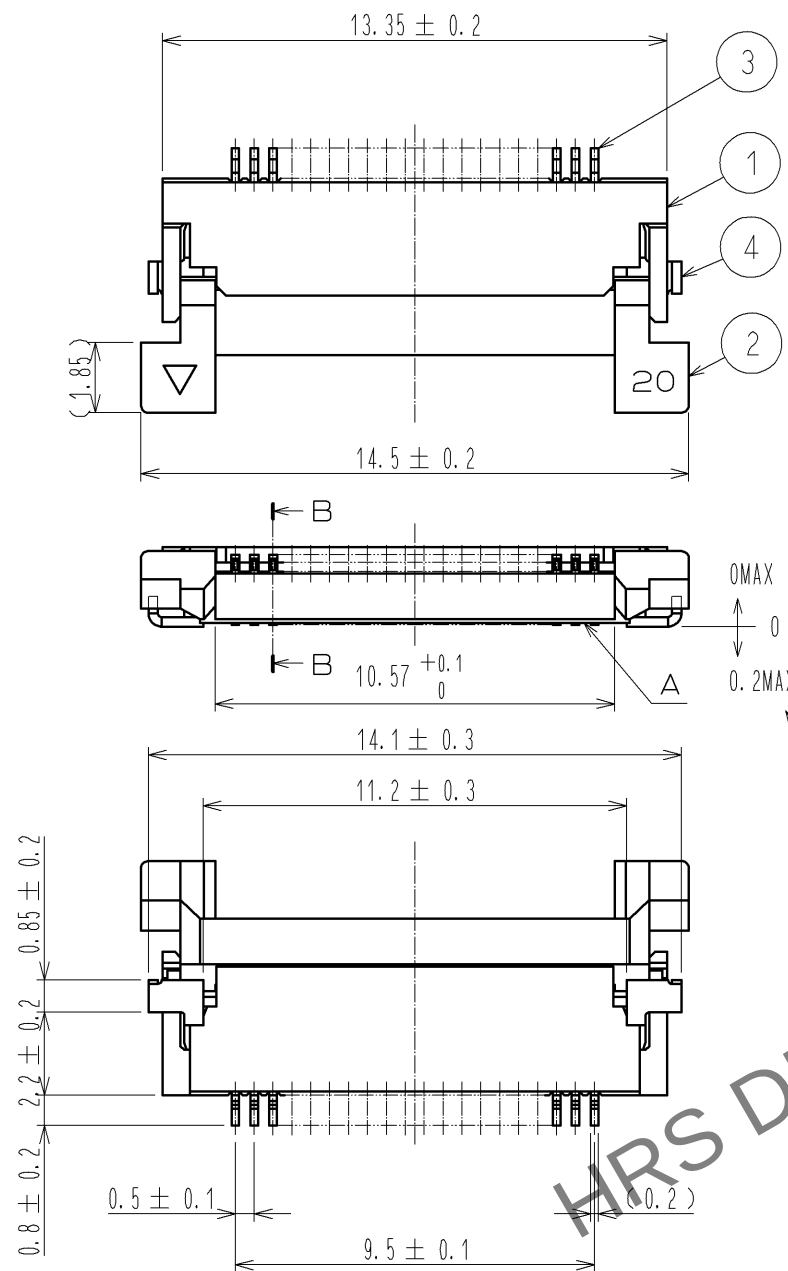




RECOMMENDED LAND PATTERN, METAL MASK

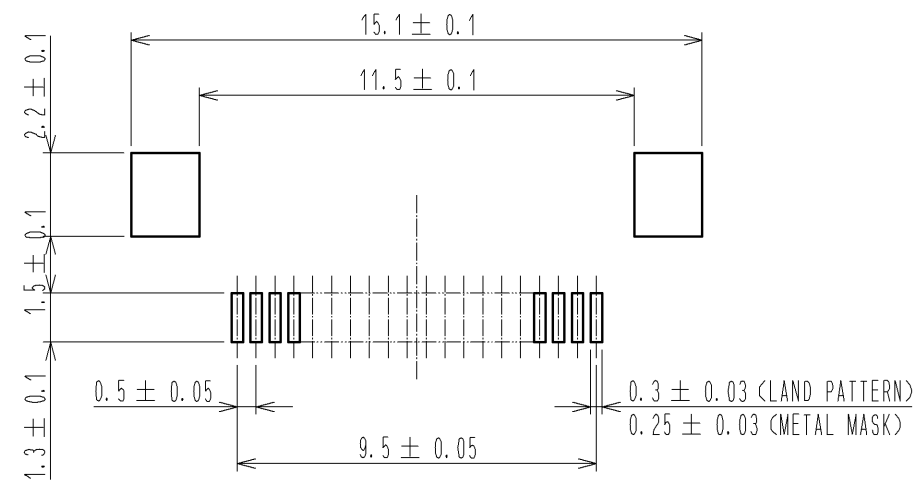

RECOMMENDED METAL MASK THICKNESS t=0.15

- NOTE
- 1 REFERENCE IS A.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.	7	POLYSTYRENE	
2	PPS	(DEEP BROWN) UL94V-0	6	POLYESTER	
1	POLYAMIDE	(BEIGE) UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-002766	
DESIGNED MK. YASUMI		CHECKED HS. SAKAMOTO		DATE 09. 11. 17	
APPROVED : RI. TAKAYASU		06. 02. 14		DRAWING NO. EDC3-150554-02	
CHECED : TN. KUWATA		06. 02. 13		PART NO. FH12A-20S-0. 5SH(55)	
DESIGNED : HS. SAKAMOTO		06. 02. 13		CODE NO. CL586-0554-0-55	
DRAWN : MK. YASUMI		06. 02. 13			

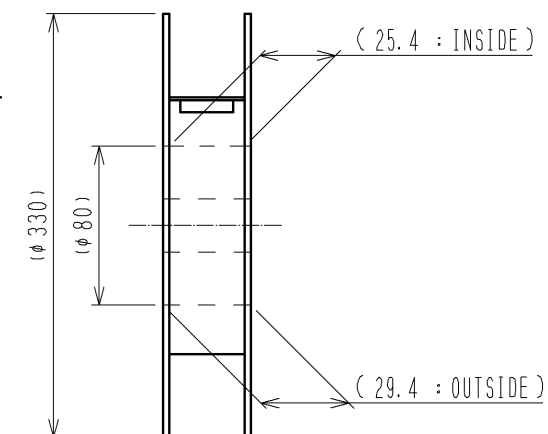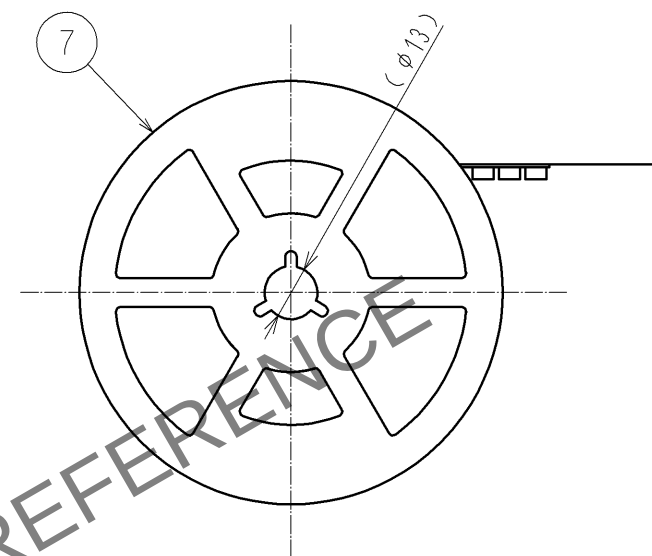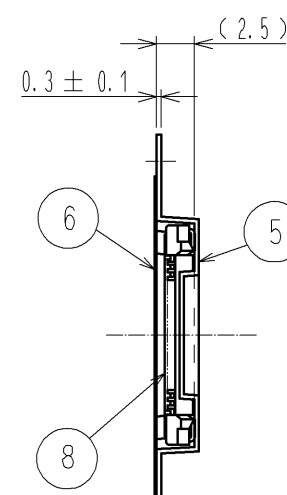

HRS	DRAWING NO. EDC3-150554-02	
	PART NO. FH12A-20S-0.5SH(55)	
	CODE NO. CL586-0554-0-55	① 2