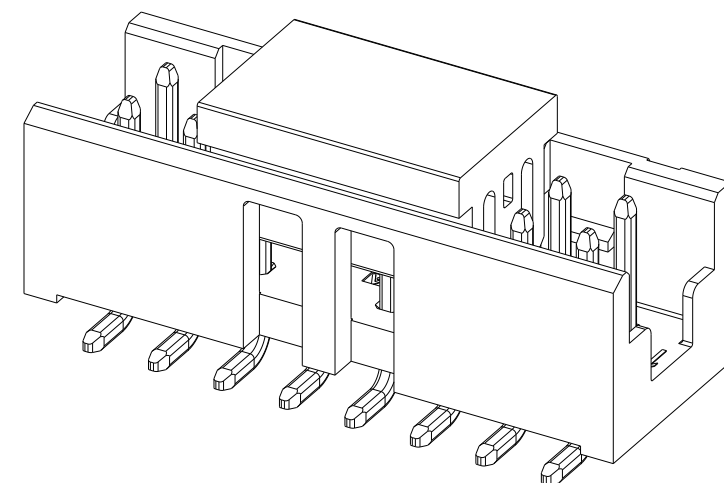


D

1- -6 AS SHOWN

NOTES:

FINISH:

7. PACKAGING: A. TAPE & REEL WITH (W /) CAP.
B. TUBE WITH (W /) CAP.

- 8 FOR TUBE PACKAGING W/CAP:
NO PICK AND PLACE CAP FOR -4 POS. HEADER POSITION STARTS FROM -6 POS.

- COPLANARITY VAIRES WITH CONNECTOR POSITION
 4-20 POS: 0.08mm
 22-40 POS: 0.10mm
 42-50 POS: 0.15mm

- 11 PLATING THICKNESS MEASUREMENT POINT REFERENCE FOR SELECTIVE GOLD PLATING AREA

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11FEB2016 RAKSHITH R NAYAK CHK 6MAR2016 KARTHIK J K APVD 6MAR2016 PRASHANTH S		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.1 2 PLC ±0.05 3 PLC ± 4 PLC ± ANGLES ±2°		NAME AMPMODU 2mm SHROUDED HEADER DUAL ROW,VERTICAL,SMD -			
		PRODUCT SPEC 108-64040 APPLICATION SPEC 114-64040		SIZE A2		GAGE CODE 00779	
MATERIAL SEE NOTES -		FINISH SEE NOTES -		DRAWING NO C=2823367		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 8:1		SHEET 1 of 3	
						REV A1	

© 2023 TE Connectivity. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

SMART PART NUMBER

2MM - HSD - D - VS - 00 - - -

PRODUCT SERIES

2MM

AMPMODU 2mm series

GENDER / TYPE

HSD

Shrouded headers for detent latch

NUMBER OF ROWS

D

Double row

NUMBER OF PINS PER ROW

XX

02 through 16,20,22,25
(enter two digits)

ORIENTATION & TERMINATION

VS

Vertical surface mount

PACKAGING

TBP

Tube with cap

TRP

Tape and reel with cap

PLATING

T	Tin
F	0.1µm selective Gold (Gold flash)
M	0.38µm selective Gold
H	0.76µm selective Gold

TAIL LENGTH

00

N/A for surface mount

SMART PN EXAMPLES :

1. AMPMODU 2MM, SHROUDED HEADER STD VERSION, DOUBLE ROW , 03 POSITION PER ROW , SURFACE MOUNT, TAIL LENGTH NOT APPLICABLE, TIN PLATING, TUBE WITH CAP
2MM-HSD-D03-VS-00-T-TBP

2. AMPMODU 2MM, SHROUDED HEADER STD VERSION, DOUBLE ROW , 16 POSITION PER ROW , SURFACE MOUNT, TAIL LENGTH NOT APPLICABLE, 0.76µm SELECTIVE GOLD PLATING, TAPE AND REEL WITH CAP
2MM-HSD-D25-VS-00-H-TRP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

SEE NOTES

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.1

2 PLC ±0.05

3 PLC ±

4 PLC ±

ANGLES ±°

FINISH

SEE NOTES

-

DWN 11FEB2016
RAKSHITH R NAYAK

CHK 6MAR2016
KARTHIK J K

APVD 6MAR2016
PRASHANTH S

PRODUCT SPEC
108-64040

APPLICATION SPEC
114-64040

WEIGHT

CUSTOMER DRAWING

TE

TE Connectivity

NAME

AMPMODU 2mm SHROUDED HEADER
DUAL ROW,VERTICAL,SMD

-

SIZE

A2

CAGE CODE

100779

DRAWING NO

©=2823367

RESTRICTED TO

-

SCALE

1:1

SHEET

2

OF

3

REV

A1

1471-9 (3/13)

