
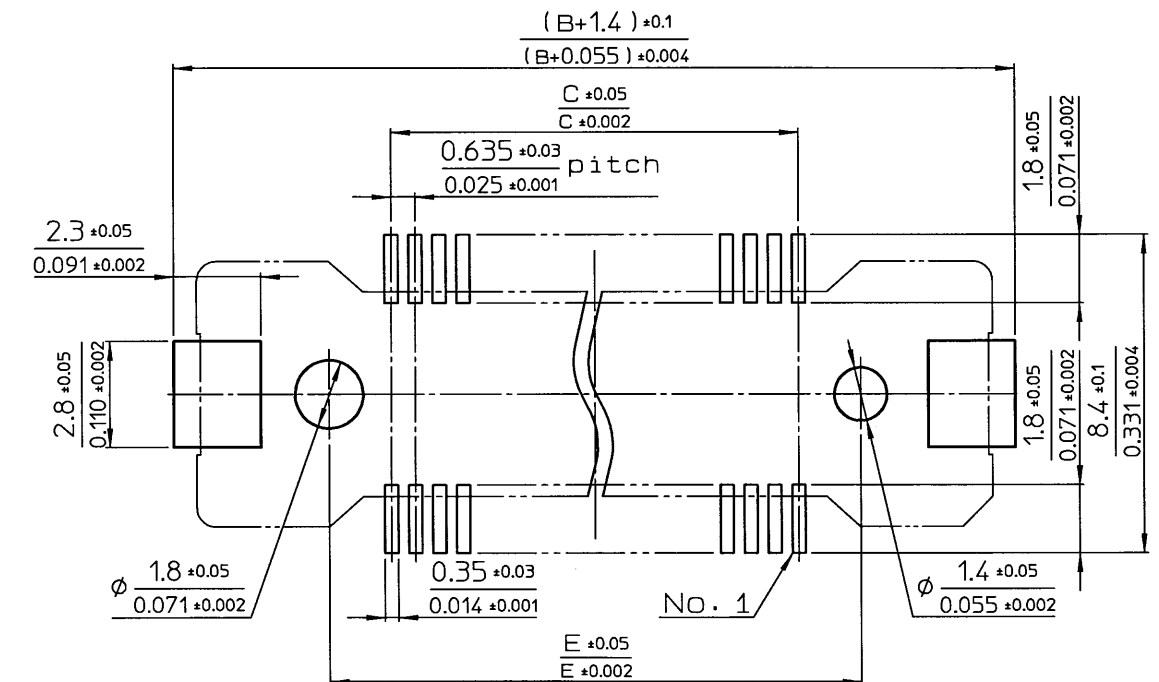

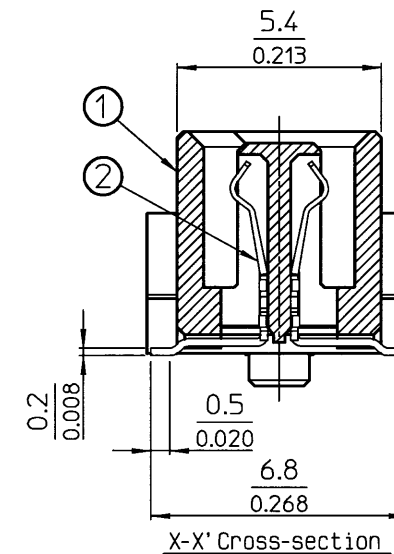
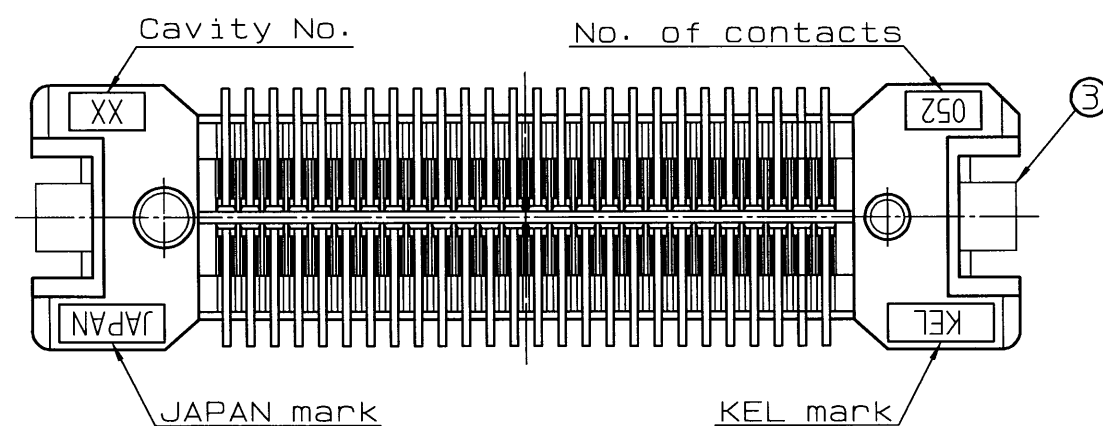
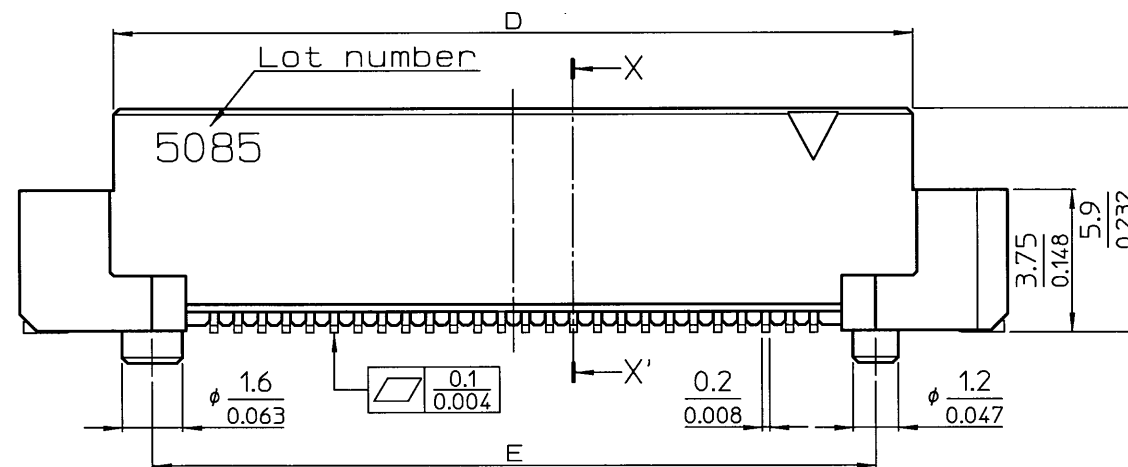


P39860

No.

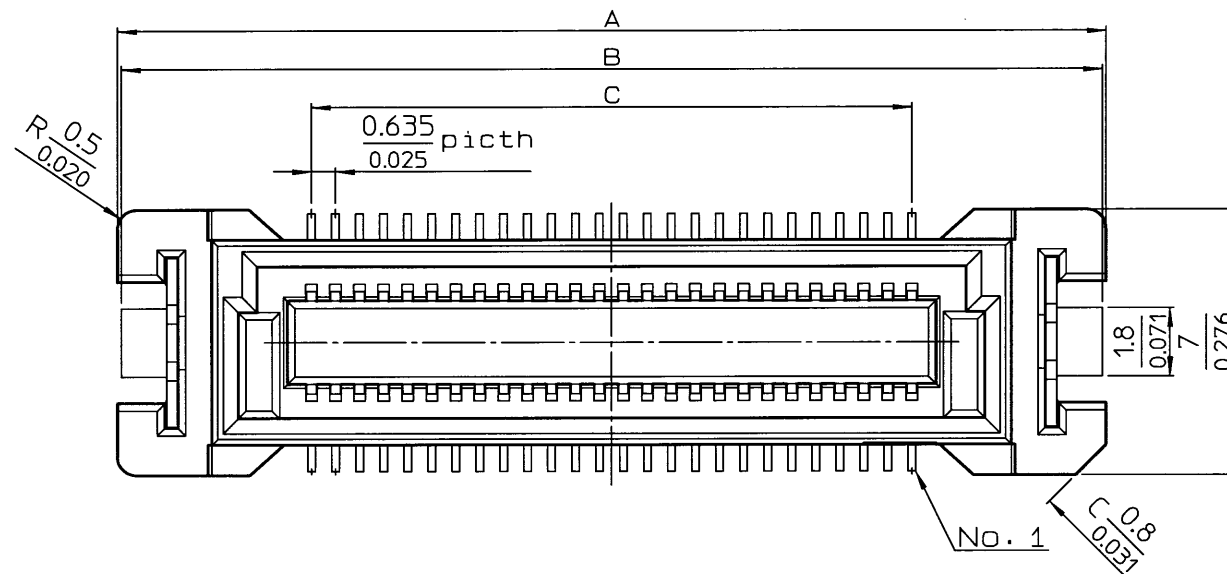

△

△ △

Notes

- 1) Dimensions are in millimeter.
- 2) Inch equivalents are in parenthesis or below the metric dimension.
- 3) Unless otherwise specified, tolerance shall be:
Less than 10 ± 0.2 (Less than 0.394 ± 0.0079)
10 ~ 50 ± 0.25 (0.394 ~ 1.969 ± 0.0098)
50 or more ± 0.3 (1.969 or more ± 0.0118)
- 4) Contact finish.
Under plating Nickel
Contact area Au 0.05 μ m or more
Tails Au 0.03 μ m or more
- 5) SMT Retention Clip Finish.
Under plating Nickel
Gold plating 0.03 μ m or more
- 6) The product represented here is 52 contacts' version.
- 7) A reference drawing of P.W.B.

△ x			
△ x1 Sep.10.2014	n. Sugita	T. Ohta	Deleted a connector with 80 pin contacts.
△ x1 Aug.10.2008	A. Shimada	K. Ishida	Added a connector with 80 pin contacts.
△ x2 Apr.22.2008	A. Shimada	T. Morikami	Added a connector with 60 pin contacts. A wrong character revision.
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY N. Sugita Jun.7.2005	DATE CHECKED BY N. Saito Jun.7.2005	DATE APPROVED BY A. Shimada Jun.7.2005
MATERIAL	TITLE		
FINISH	8611-□□□S		
KEL CORPORATION			REVISION
DRAWING No. P39860			1

3	△ SMT Retention clip	2	Copper alloy	SEE NOTE5
2	Contact	No. of contacts	Copper alloy	SEE NOTE4
1	Insulator	1	LCP Glass-filled, UL94V-0, Black	—
No.	Component	Quantity	Material	Finish