

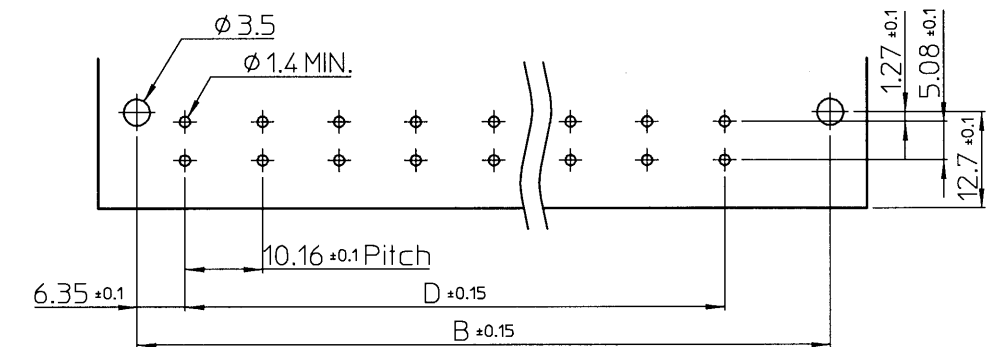


E	D	C	B	A	Number of Contacts 極数
48.5	50.8	72.39	71.12	81.08	12
89.14	91.44	113.03	111.76	121.72	20

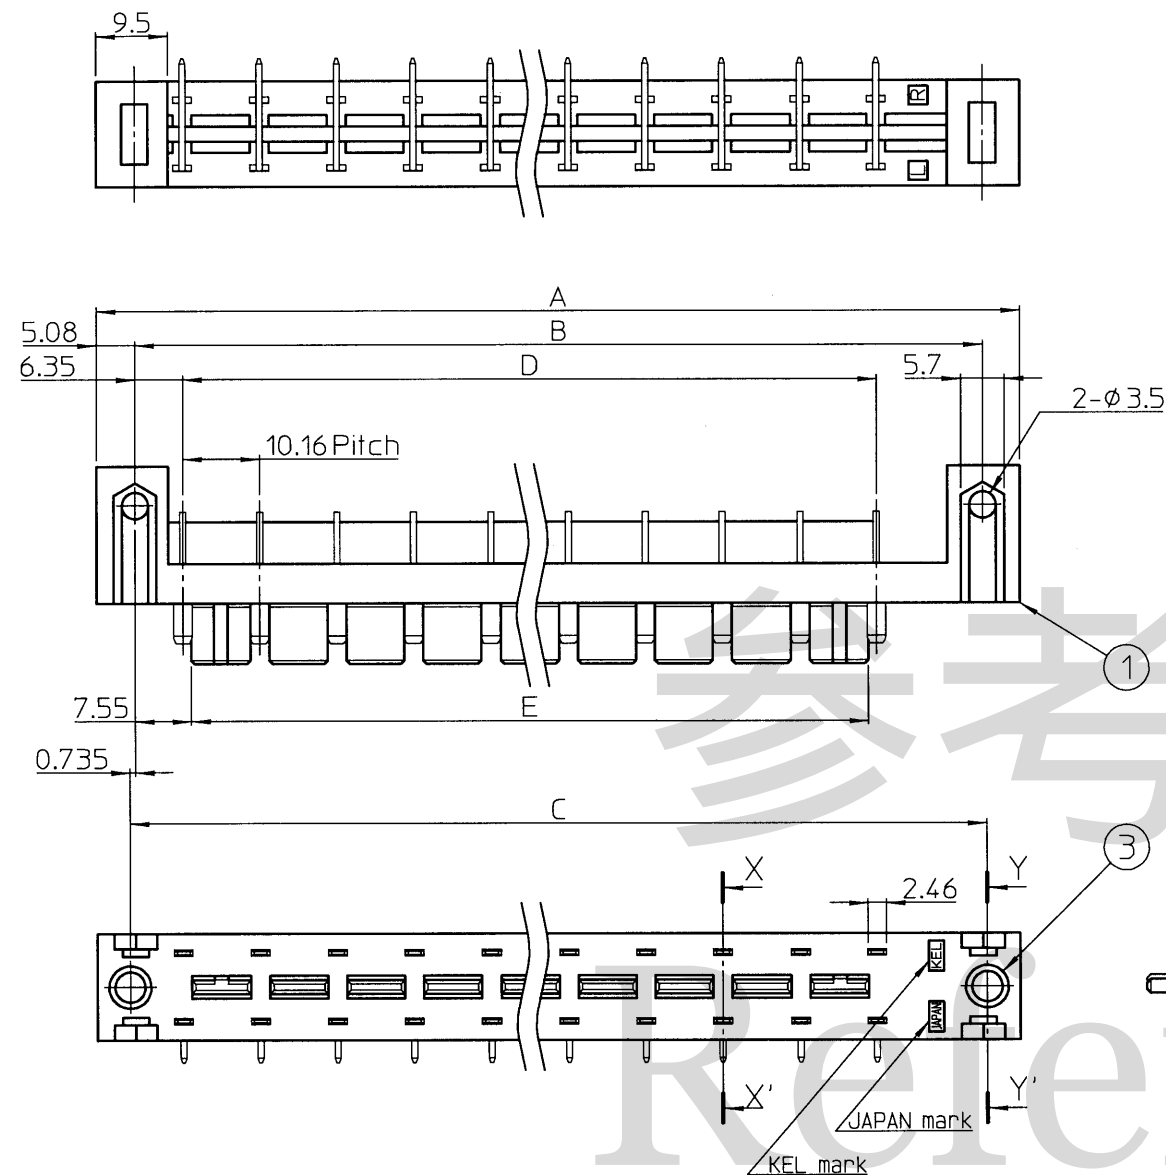

A reference drawing of P.W.B. / 基板設計要領

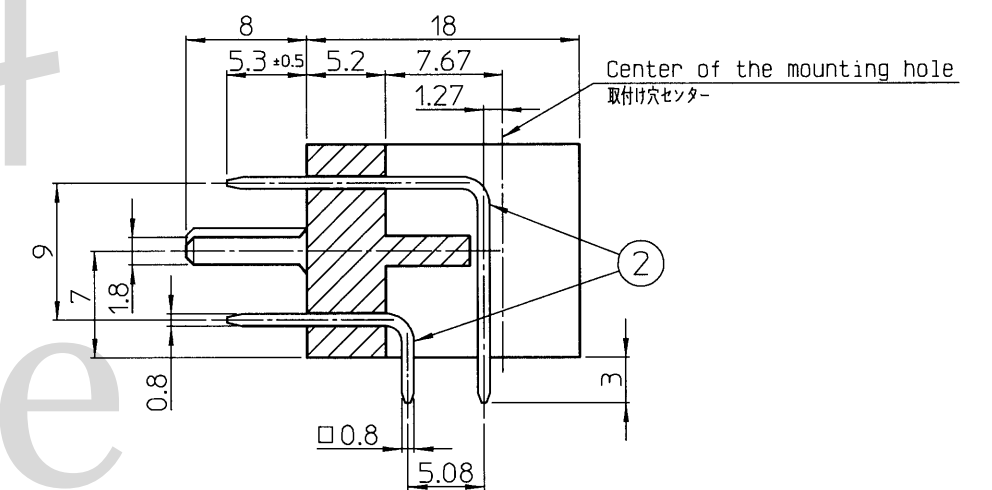

X-X' Cross-section (Scale 2:1)

NOTES

1. Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.3

50 or more / 50以上 ± 0.35

2. Contact finish / コントクトの仕上げ

Under plating Nickel / ニッケルメッキ下地

Contact area : Gold / 接触部 : 金メッキ仕上

None : 0.8 μ m or more

B : 0.38μm or more

Terminal area : Gold / テール部 : 金メッキ仕上(0.03μm以上)

3	Insert nuts インサートナット M4	2	Brass 黄銅	Nickel plating ニッケルめっき
2	Contact コンタクト	No. of contacts 極数	Copper-alloy 銅合金	SEE NOTE 2
1	Insulator インシュレータ	1	PBT Glass-filled・UL94V-0 PBT・ガラス繊維入り UL94V-0	—
No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上

△ ×				
△ ×				
△ ×				
Jun.18,2021	N. Saito	Y. Abe	K. Chusha	Revised for style change. / 様式変更の為、改版.
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY M. Abe	DATE Aug. 1, 2005	CHECKED BY T. Mogami	DATE Aug. 2, 2005
			APPROVED BY A. Shimada	DATE Aug. 2, 2005
			SCALE 1:1	UNIT mm
MATERIAL	TITLE		KEL CORPORATION	
FINISH	7011-□□□-161R-□-F		DRAWING No.	REVISION
			P39921	2