

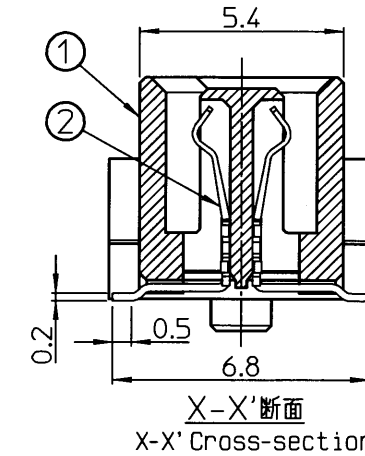
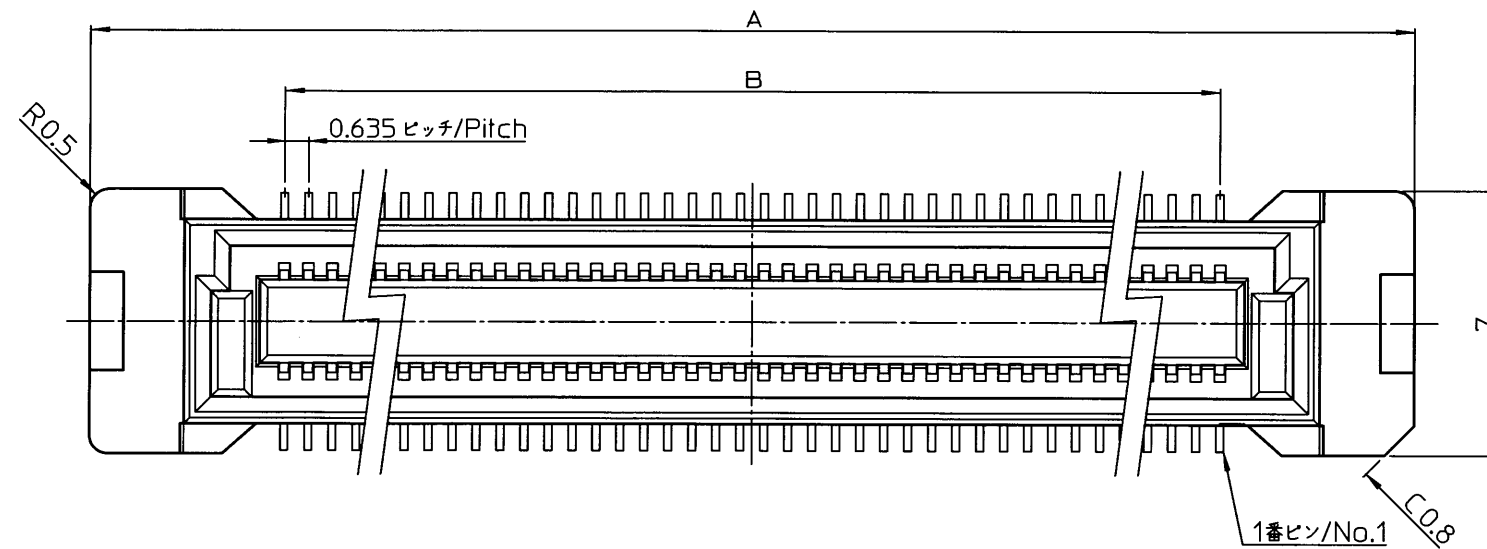
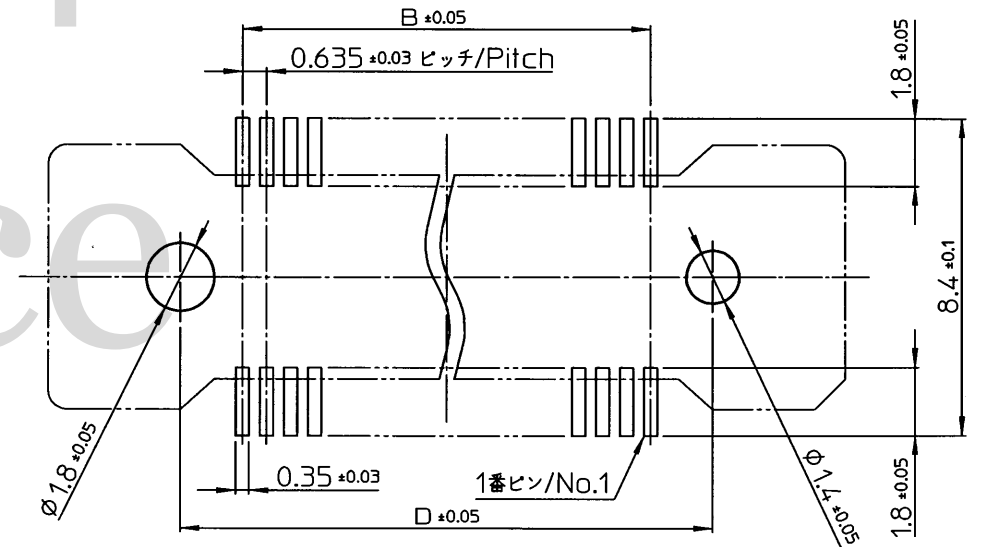


D	C	B	A	/No. of contacts
15.35	17.35	12.065	22.35	40
19.16	21.16	15.875	26.16	52
21.70	23.70	18.415	28.70	60
28.05	30.05	24.765	35.05	80
34.40	36.40	31.115	41.40	100
40.75	42.75	37.465	47.75	120
47.10	49.10	43.815	54.10	140
53.45	55.45	50.165	60.45	160




NOTES

1. 指定無き寸法公差/Unless otherwise specified,
tolerance shall be:
0~10未満/Less than 10 ± 0.2
10~50未満/10~50 ± 0.25
50以上/50 or more ± 0.3
2. コンタクト仕上げ/Contact finish.
ニッケルメッキ下地/Under plating Nickel
接触部 : 金メッキ仕上げ(0.05 μ m以上)/Contact area Au 0.05 μ m or more
テール部 : 金メッキ仕上げ(0.03 μ m以上)/Tail area Au 0.03 μ m or more
3. 参考基板設計要領/A reference drawing of P.W.B.

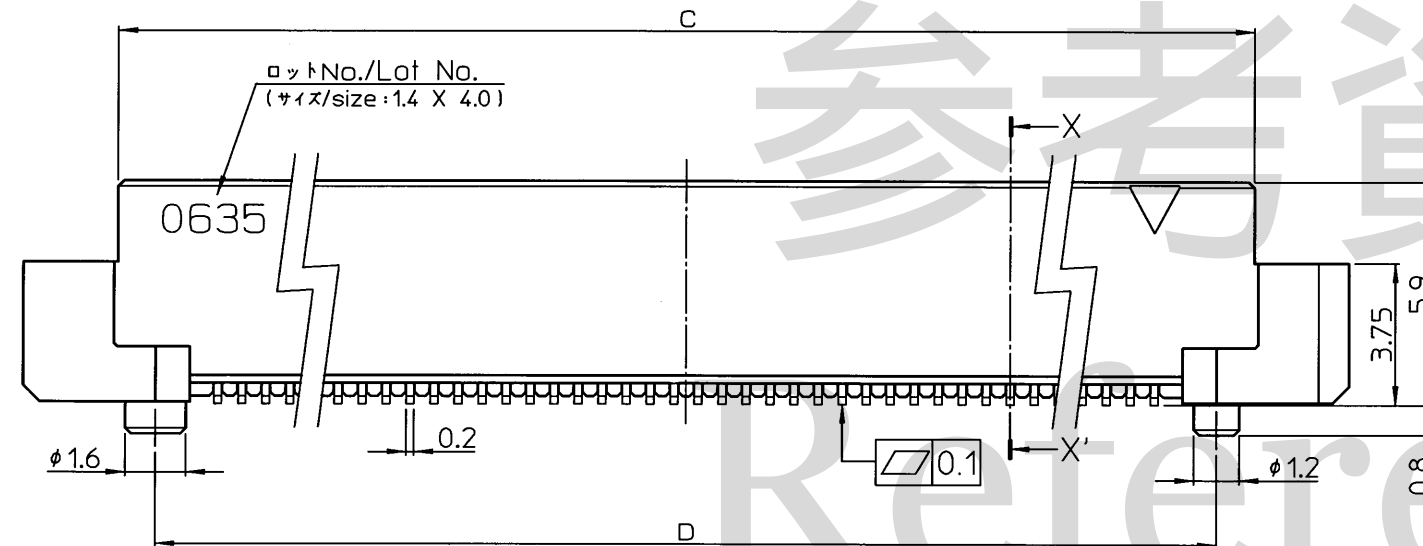

参考基板設計要領（コネクタ搭載面）
A reference drawing of P.W.B.

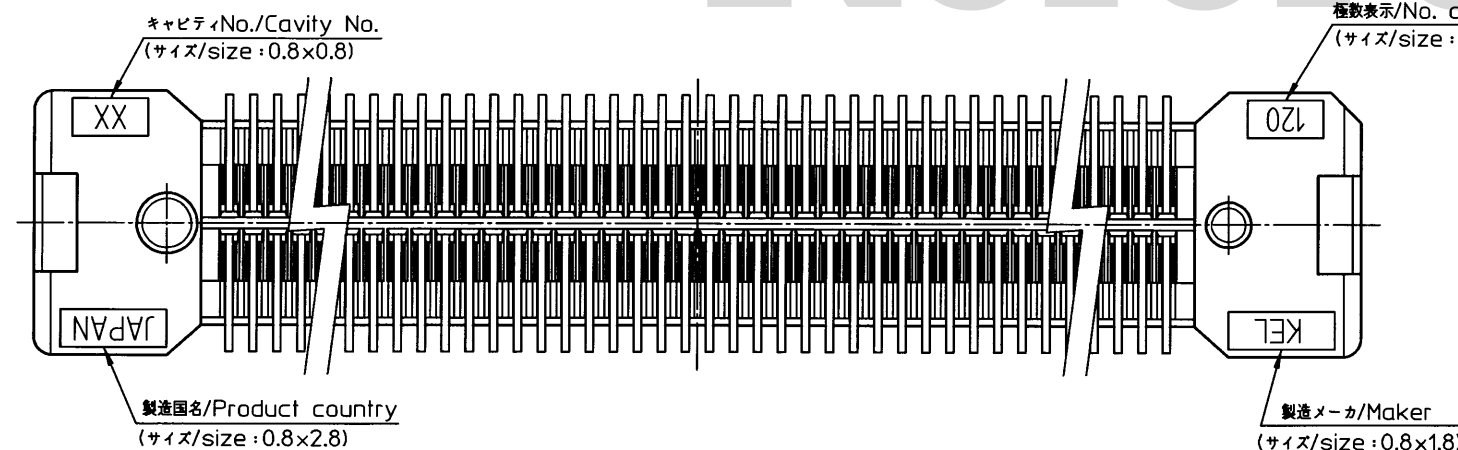

△ ×			
△ ×			
△ ×			
△ ×			
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY N. Saito	DATE Mar. 30, 2010	CHECKED BY K. Maegawa
			DATE Mar. 30, 2010
			APPROVED BY A. Shimoda
			DATE Mar. 30, 2010
			SCALE 5:1
			UNIT mm
MATERIAL	TITLE		KEL CORPORATION
FINISH	8630E-□□□S		DRAWING No. P3C130
			REVISION 1