
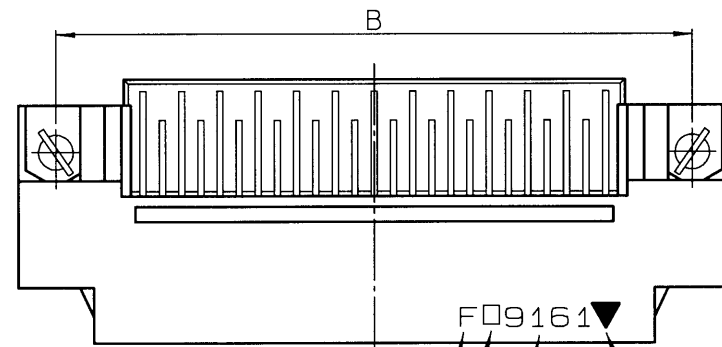


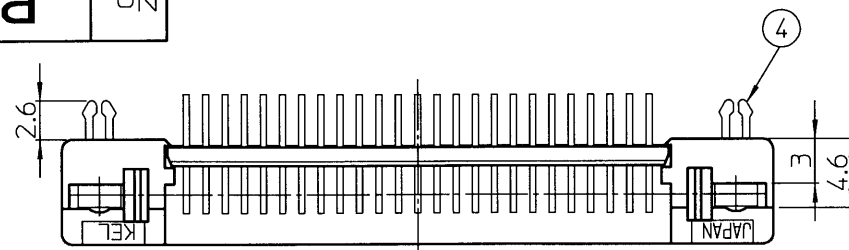


SEE NOTE3




SEE NOTE2 (Contact area/接触部)

Lot number/ロットNo.

Polarization mark / 極性表示

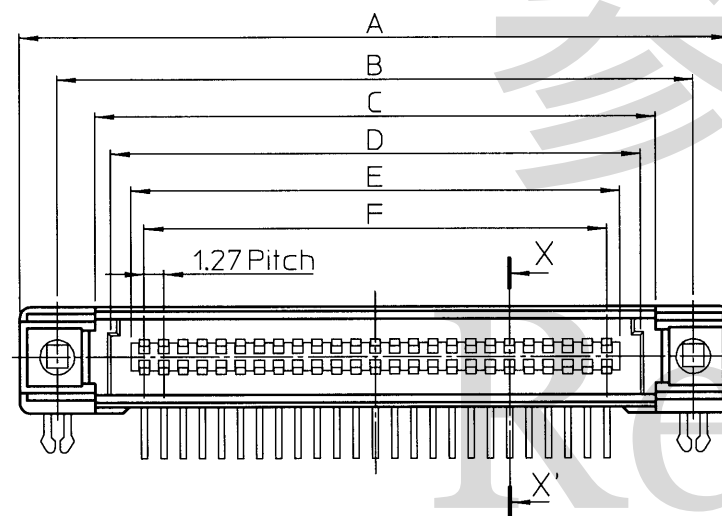

Only 80・100 pins
have slits.
80・100極の場合のみ
スリット(溝)有り

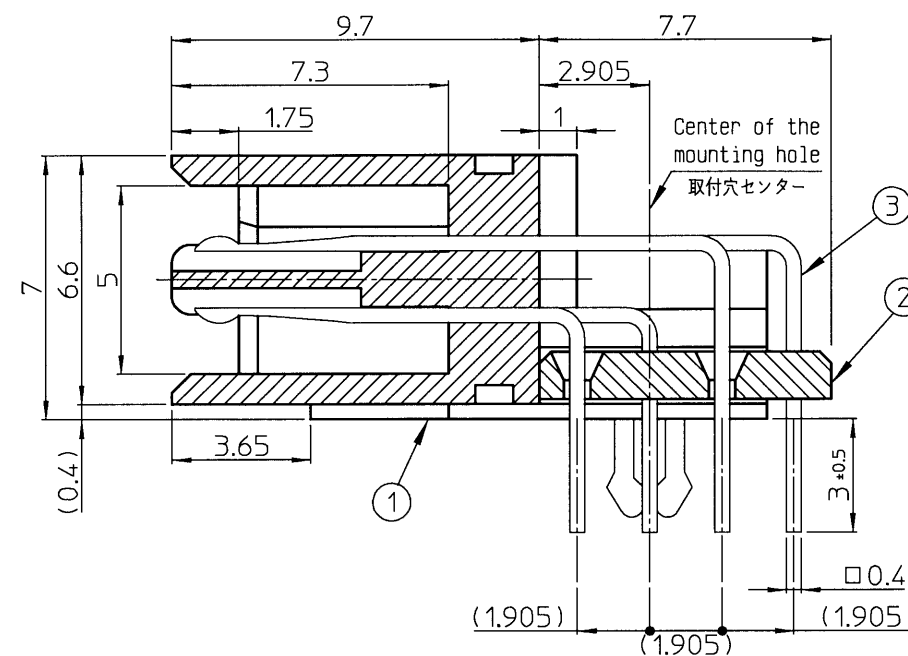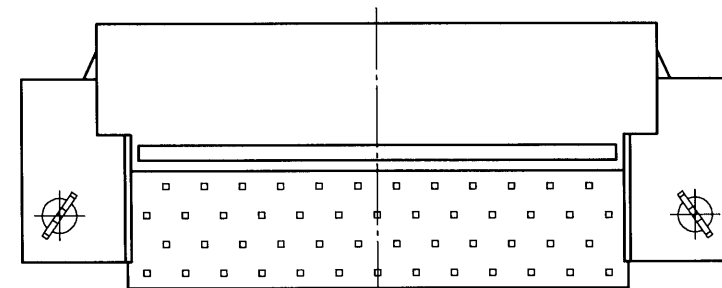

X-X' Cross-section(Scale 5:1)

Notes

1. Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more	/	50以上	±0.3
------------	---	------	------

2. Contact finish./ コンタクトの仕上げ

Under plating Nickel / ニッケル)

Contact area : Gold / 接触部 :

NONE: AU 0.0

D : Au 0.2

H : Au 0.7

Terminal area : Tin-copper plating



3.F:RoHS Compliant / RoHS対応品

4. This drawing is based on 50 pin contacts. / 本図は、50極で記載したものである。

5. A reference drawing of P.W.B. / 參考基樁設計要領

Board thickness / 適合基板厚 $t=1.6^{+0.2}_{-0.1}$

(Connector mounting side / コネクタ搭載面)

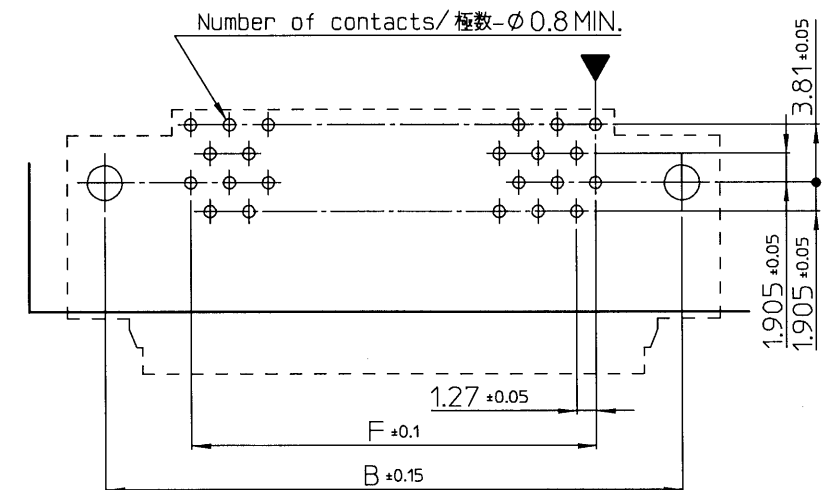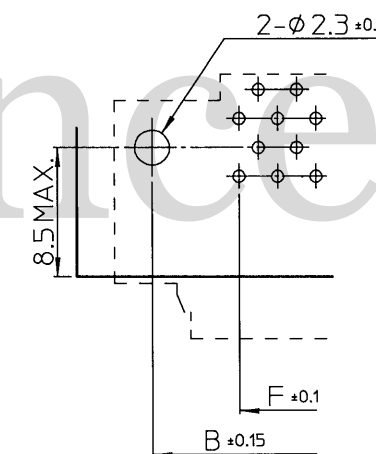

20 · 32 · 36 · 40 · 52 · 60 · 68 · 80 · 100 Pin

26 · 30 · 34 · 50 Pin

△ ×				
△ ×				
△ ×				
Apr. 30, 2021	N. Saito	T. Megami	Y. Abe	Revised for style change. / 様式変更の為、改版。
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Oct. 29, 2018	CHECKED BY N. Saito	DATE Oct. 30, 2018
			APPROVED BY M. Suzuki	DATE Oct. 31, 2018
			SCALE 2:1	UNIT mm
MATERIAL	TITLE		KEL CORPORATION	
FINISH	8831E-□□□-170L□-F		DRAWING No.	P3D813
				REVISION 2