
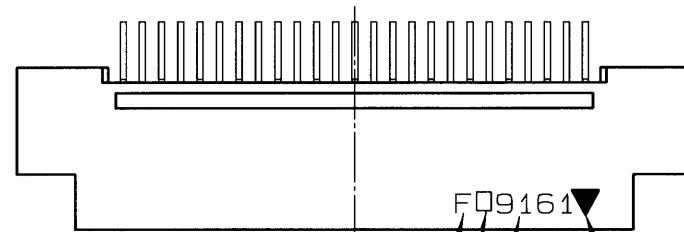





F	E	D	C	B	A	No. of contacts 極数
11.43	13.13	15.83	17.83	20.32	25.43	20
15.24	16.94	19.64	21.64	24.13	29.24	26
17.78	19.48	22.18	24.18	26.67	31.78	30
19.05	20.75	23.45	25.45	27.94	33.05	32
20.32	22.02	24.72	26.72	29.21	34.32	34
24.13	25.83	28.53	30.53	33.02	38.13	40
30.48	32.18	34.88	36.88	39.37	44.48	50
31.75	33.45	36.15	38.15	40.64	45.75	52
36.83	38.53	41.23	43.23	45.72	50.83	60
41.91	43.61	46.31	48.31	50.80	55.91	68

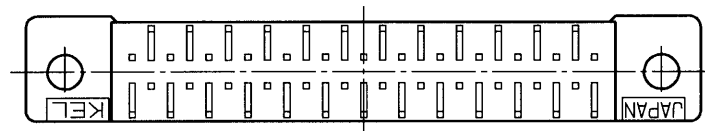

SEE NOTE2(Contact area/接触部)

Lot number/ロットNo.

Polarization mark / 極性表示

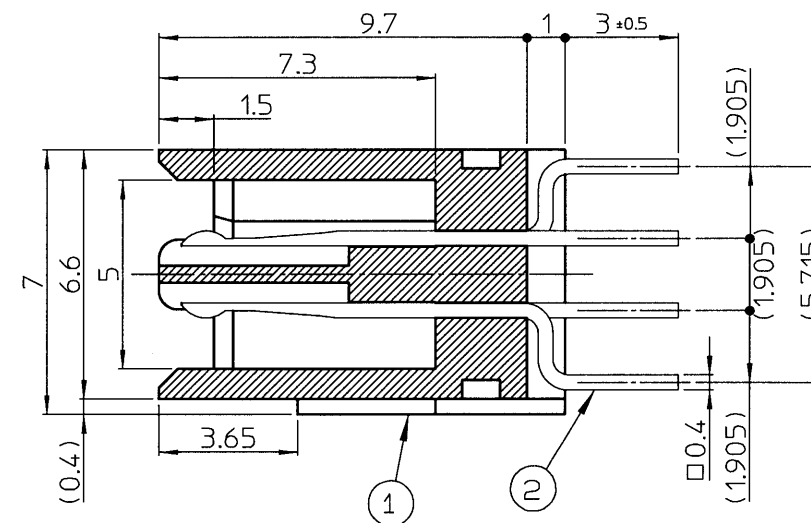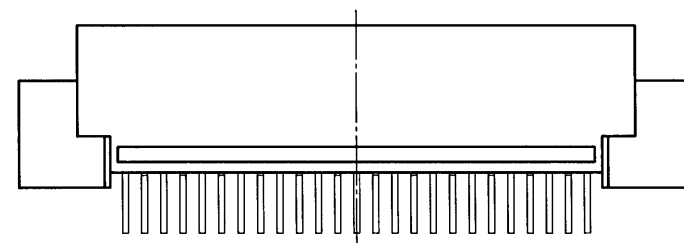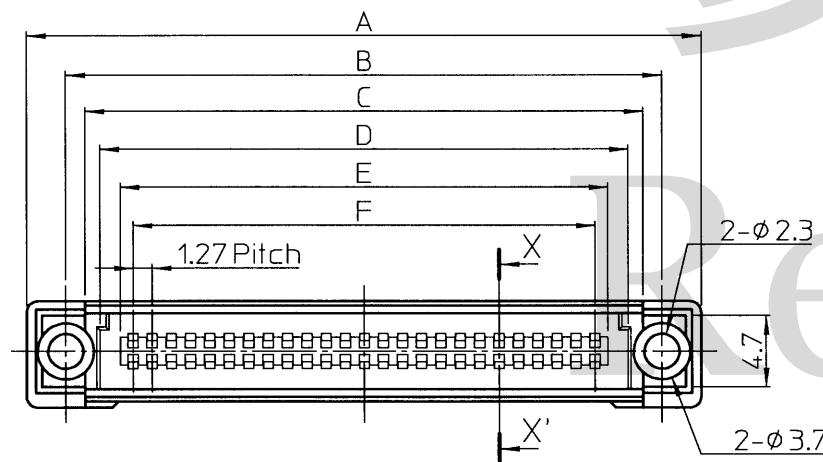

X-X' Cross-section (Scale 5:1)

Notes

1. Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more / 50以上 ±0.3

2. Contact finish./ コンタクトの仕上げ

Under plating Nickel / ニッケルメッキ下地

Contact area : Gold / 接触部 : 金メッキ仕上げ

NONE: Au 0.05 μ m or more

D : Au 0.25 μ m or more

H : Au 0.76 μ m or more

Terminal area : Tin-copper plating/ テール部: 錫銅メッキ仕上げ


3.F:RoHS Compliant / RoHS対応品

4. This drawing is based on 50 pin contacts. / 本図は、50ピンで記載したものである。

5. A reference drawing of P.W.B. / 參考基板設計要領

Board thickness / 適合基板厚 $t=1.6 \pm_{-0.1}^{+0.2}$

(Connector mounting side / コネクタ搭載面)

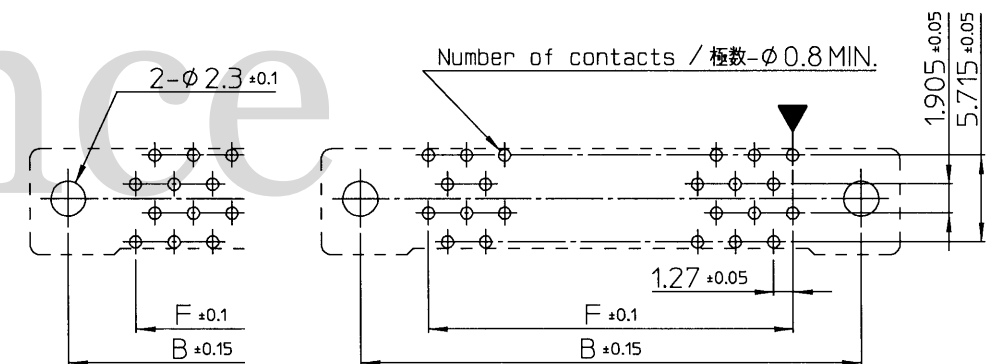

20 · 32 · 40 · 52 · 60 · 68 Pin

26 · 30 · 34 · 50 Pin

△ ×				
△ ×				
△ ×				
Apr. 26, 2021	N. Saito	T. Mogami	Y. Abe	Revised for style change. / 様式変更の為、改版。
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Oct. 25, 2018	CHECKED BY N. Saito	DATE Oct. 29, 2018
			APPROVED BY M. Suzuki	DATE Oct. 29, 2018
			SCALE 2:1	UNIT mm
MATERIAL	TITLE			KEL CORPORATION
FINISH	8830-□□□-170S□-F			DRAWING No. P3D803
				REVISION 2