
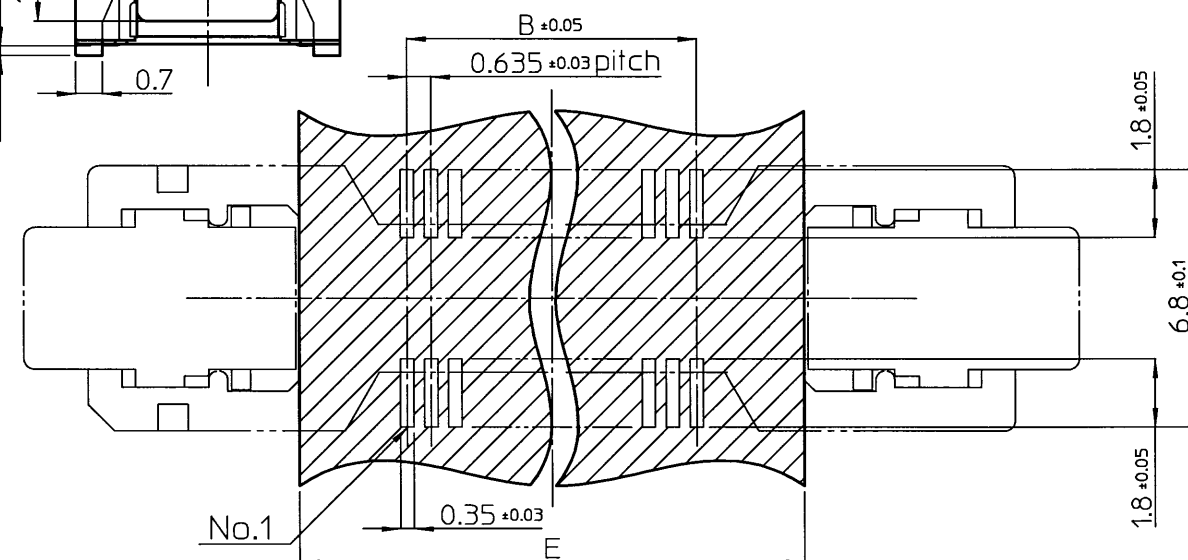
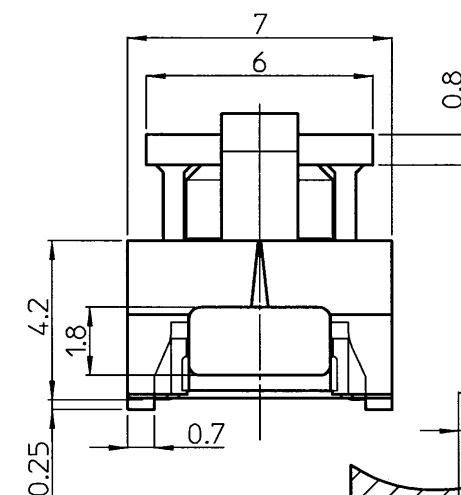
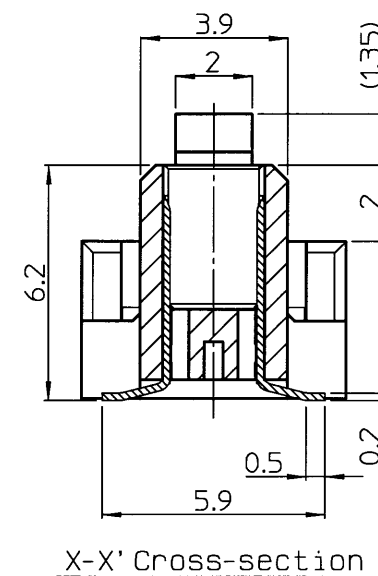
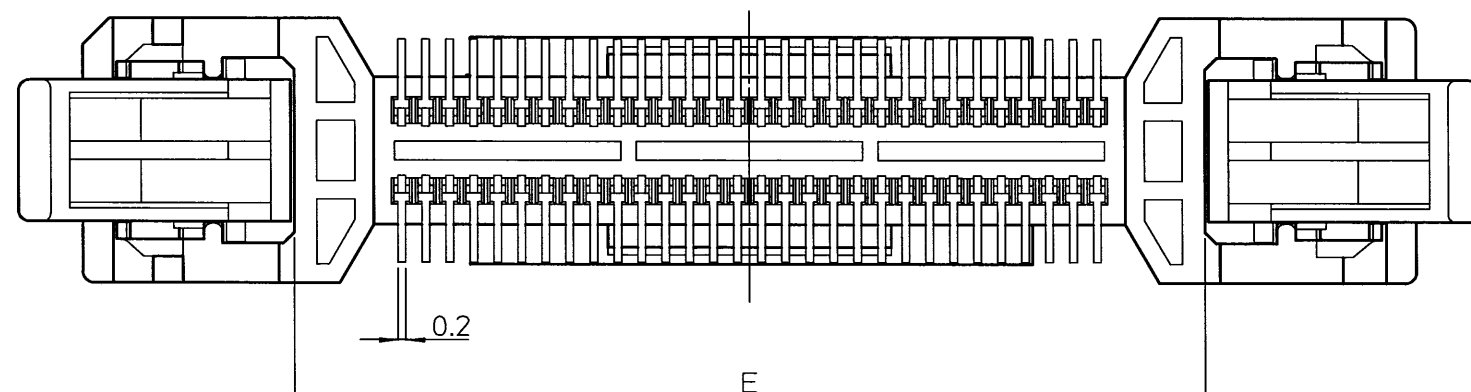
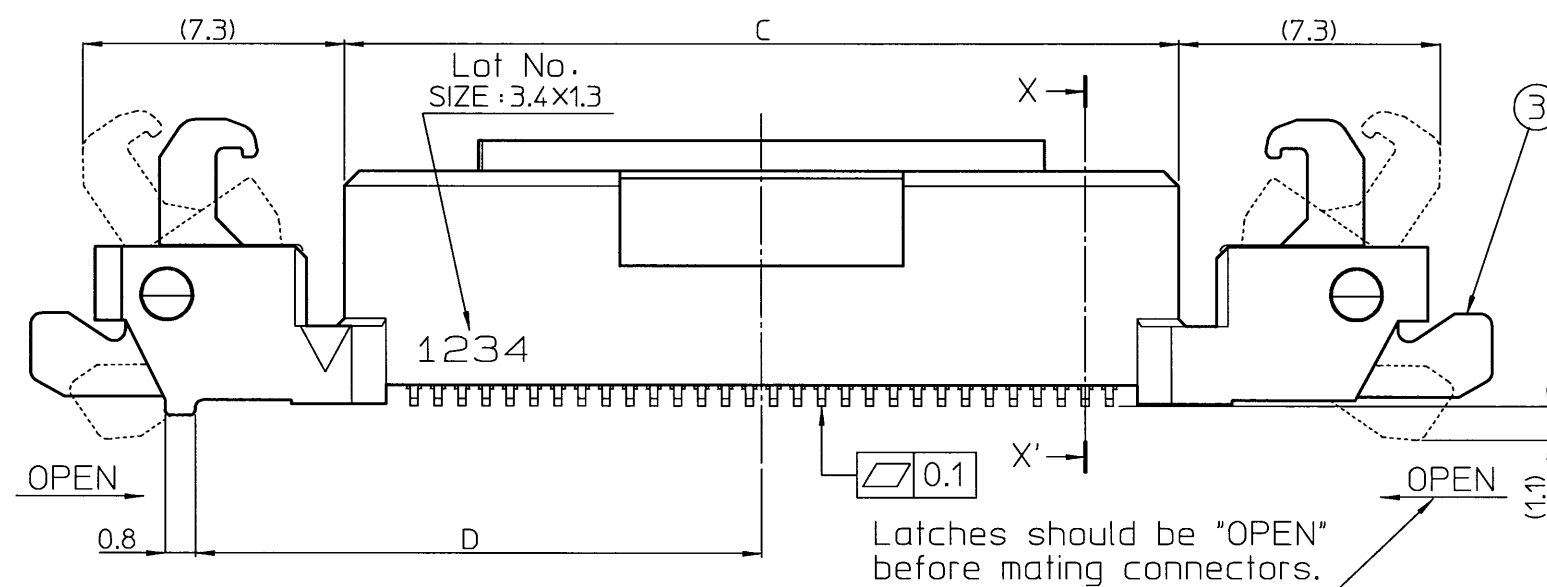


P3C712

ON

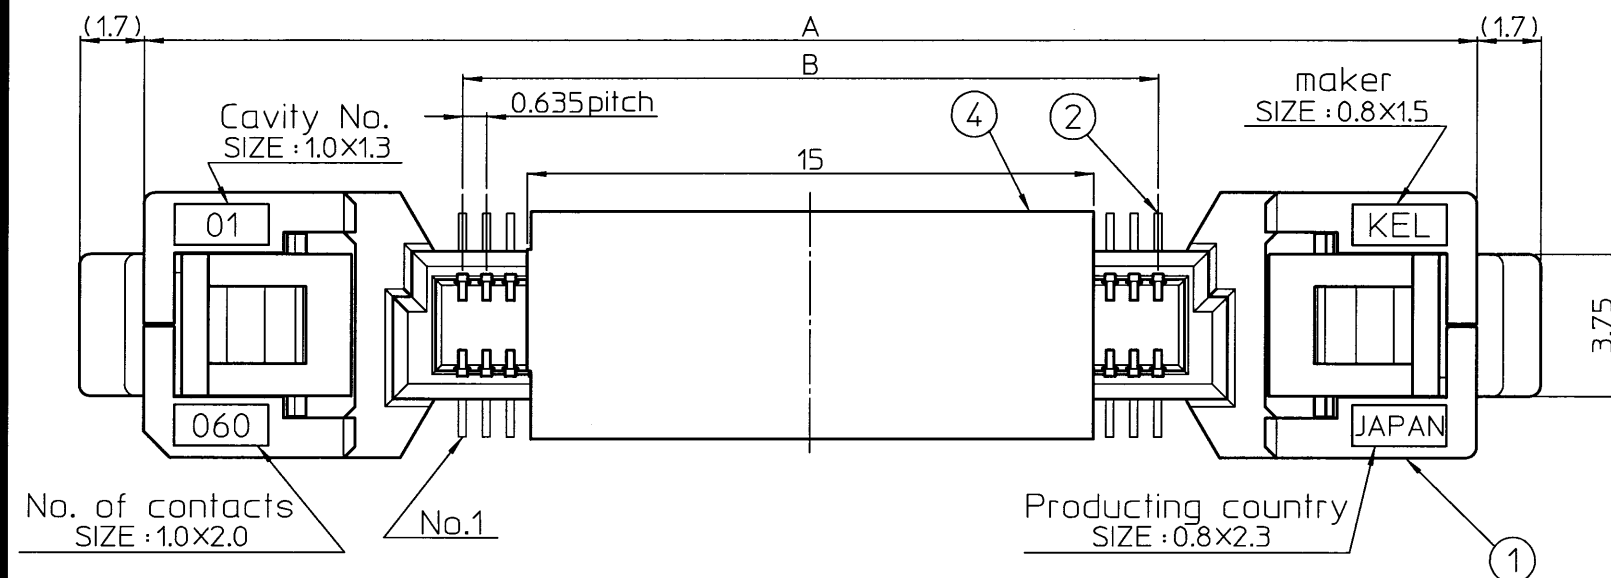

E	D	C	B	A	No. of contacts
17.75	11.825	15.75	12.065	28.95	40
24.1	15.0	22.1	18.415	35.3	60
49.5	27.7	47.5	43.815	60.7	140
55.85	30.875	53.85	50.165	67.05	160

NOTES

- Unless otherwise specified, tolerance shall be:
Less than 10 ±0.2
10 ~ 50 ±0.25
50 or more ±0.3
- Contact finish.
Under plating Nickel
Contact area Au 0.05μm or more
Tails area Au 0.03μm or more
- The product represented here is 60 contacts version.
- Part number
8602E - □□□ S - □
P: with Pick up cover
Shape of Tale
S: SMT Straight
Number of contacts
△ 40: 40Pin, 060: 60Pin
140: 140Pin, 160: 160Pin
Series name
8602E: Receptacle (Eject type)

5. A reference drawing of P.W.B.

No.	Component	Quantity	Material	Finish
4	Pick up cover	1	Glass-filled Modified PA6T UL94V-0(Natural(Beige))	—
3	Lock	2	Glass-filled LCP UL94V-0(Black)	—
2	Contact	No. of contacts	Copper alloy	SEE NOTE2
1	Insulator	1	Glass-filled LCP UL94V-0(Black)	—

△ x			
△ x			
△ x			
△ x2 Sep. 9.2014	N. Sugita	T. Ohta	Deleted 40pin.
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY T. Azuma	DATE Mar. 6, 2013	CHECKED BY K. Tagai
MATERIAL	DATE Mar. 6, 2013	APPROVED BY N. Sugita	DATE Mar. 6, 2013
FINISH	SCALE 5:1	UNIT mm	
TITLE 8602E-□□□S-□		KEL CORPORATION	
DRAWING No. P3C712		REVISION 1	