

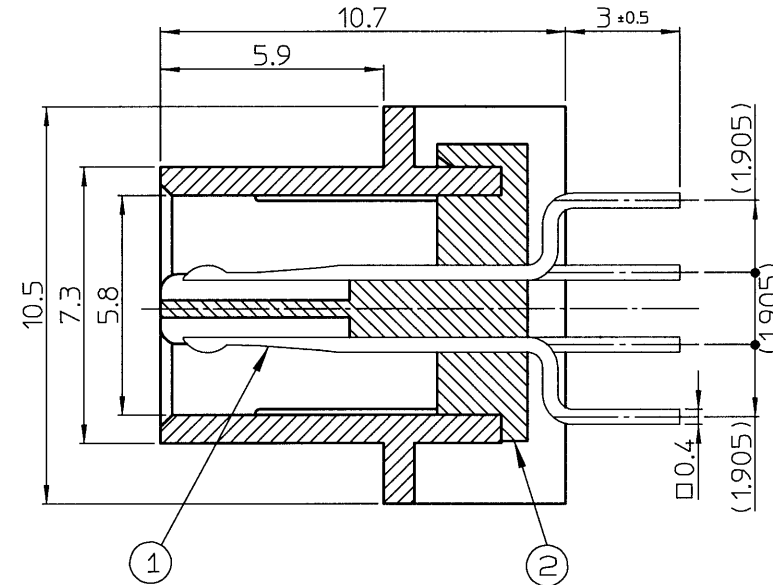
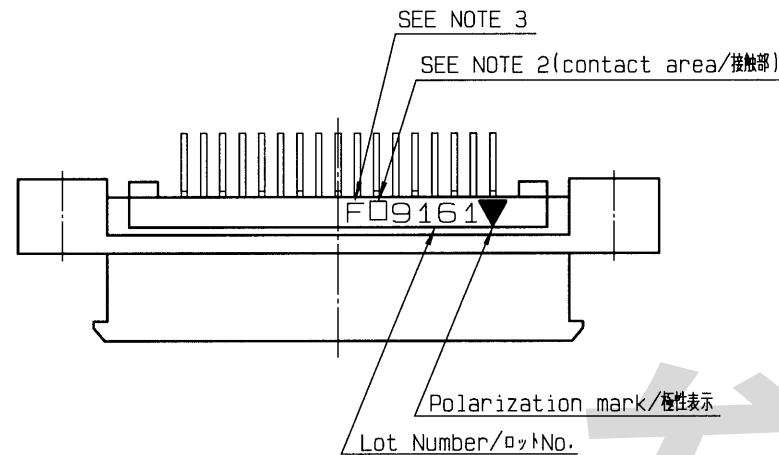


G	F	E	D	C	B	A	Number of Contacts 極数
29.48	16.51	18.21	21.81	26.68	32.48	38.48	28
33.29	20.32	22.02	25.62	30.49	36.29	42.29	34
49.80	36.83	38.53	42.13	47.00	52.80	58.80	60
54.88	41.91	43.61	47.21	52.08	57.88	63.88	68
62.50	49.53	51.23	54.83	59.70	65.50	71.50	80



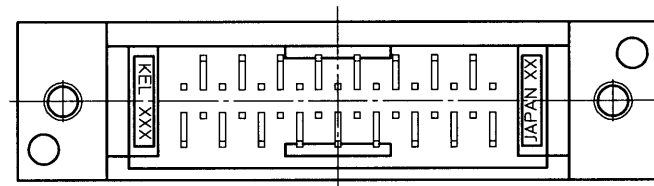


X-X' Cross-section (Scale 5:1)

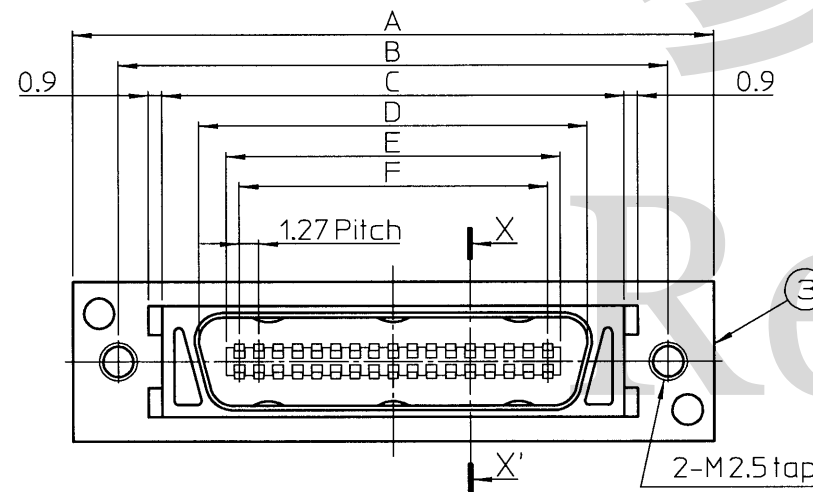


Shaded area will be the diecast parts

斜線部ダイキャストシェル部

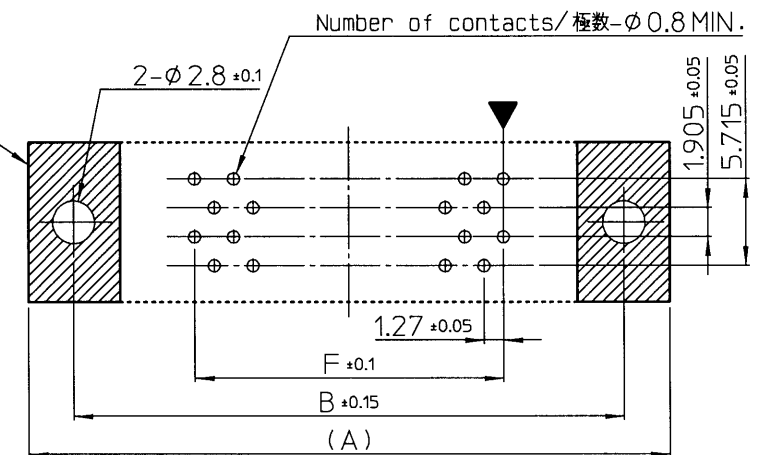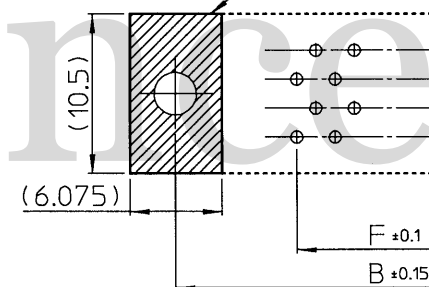

28, 60, 68, 80 pin


34 pin

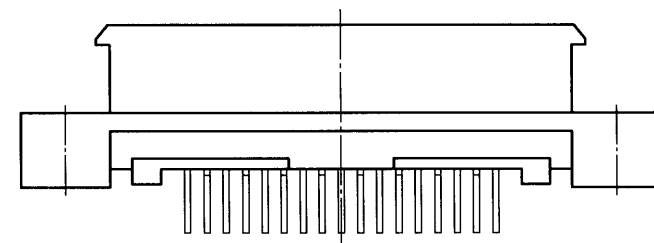

3	Diecast shell ダイキャストシェル	1	Zinc-alloy 亜鉛合金	Nickel plating ニッケルめっき
2	Insulator インシュレータ	1	Nylon 66 Glass-filled, UL94V-0 66ナイロン・ガラス繊維入り UL94V-0	Black 黒色
1	Contact コンタクト	Number of contacts/極数	Copper-alloy 銅合金	SEE NOTE 2
No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上

NOTES

- Unless otherwise specified, tolerance shall be: / 指定なき寸法公差
Less than 10 / 0~10未満 ±0.2
10 ~ 50 / 10~50未満 ±0.25
50 or more / 50以上 ±0.3
- Contact finish. / コントクトの仕上げ
Under plating Nickel / ニッケルメッキ下地
Contact area: Gold / 接触部: 金メッキ仕上
D: 0.25µm or more
H: 0.76µm or more
Terminal area: Tin-copper / テール部: 錫銅メッキ仕上
- F: RoHS compliant / RoHS対応品
- This drawing is based on 34 pin contacts. / 本図は34極で記載したものである。
- Panel Cutout / パネル取付寸法
Mounting panel thickness / 適合パネル厚: 2.0 or less / 2.0以下

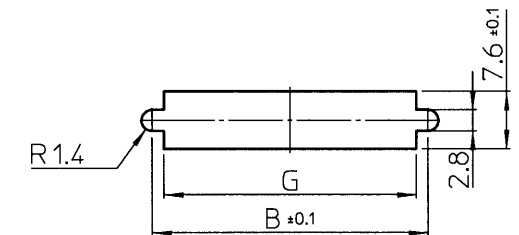

6. A reference drawing of P.W.B. / 基板設計要領
Board thickness / 適合基板厚: t=1.6±0.2

(Connector mounting side / コネクタ搭載面)

△ ×					
△ ×					
△ ×					
May.24,2021	N.Saito	Y.Abe	K.Chuho	Revised for style change. / 様式変更の為、改版。	
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY Y. Abe	DATE Nov. 21, 2018	CHECKED BY N. Saito	DATE Nov. 28, 2018	APPROVED BY M. Suzuki
MATERIAL		TITLE		KEL CORPORATION	
FINISH		8850-□□□-170SQ-F 28, 34, 60, 68, 80 pin		DRAWING No.	REVISION
				P3D904	2