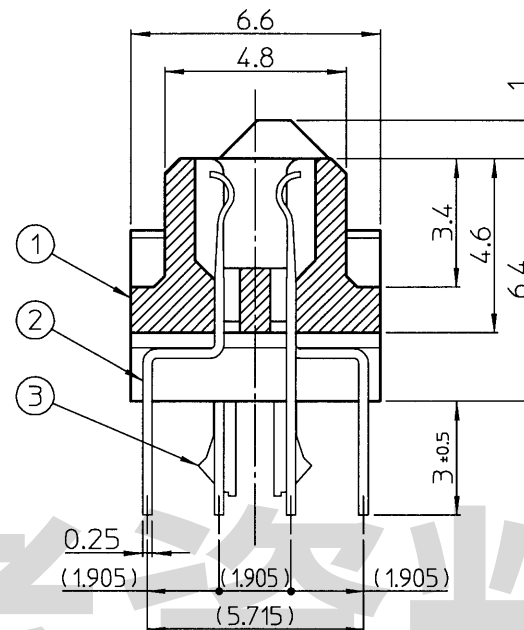
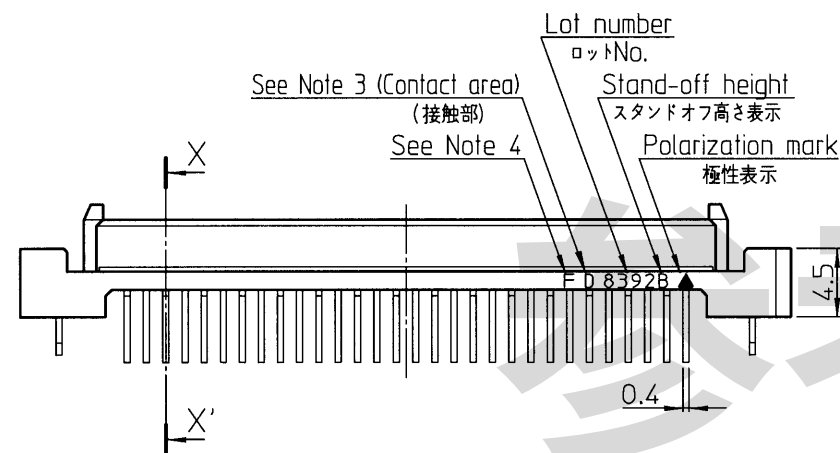

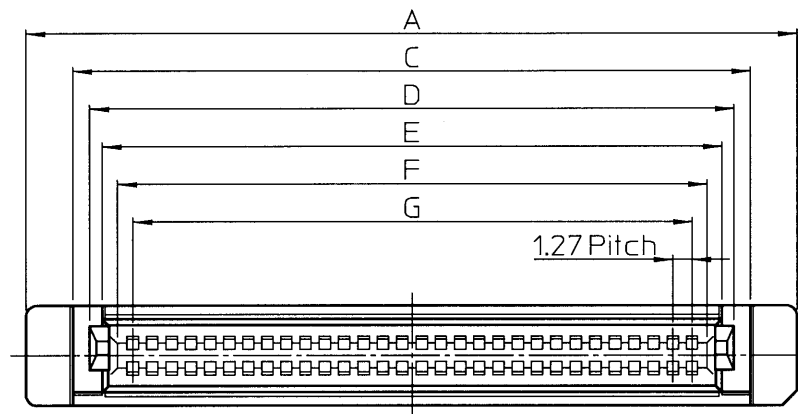
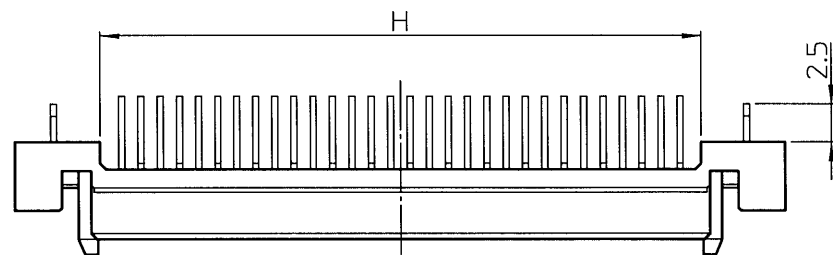
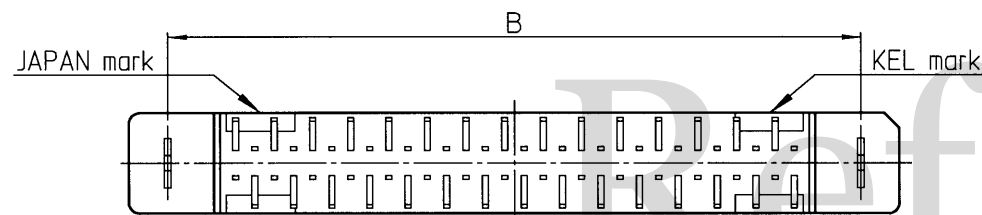


P39658


.ON

X-X' Cross-section (Scale 5:1)
X-X'断面(5:1)

H	G	F	E	D	C	B	A	Number of contacts 極数
14.23	11.43	13.43	15.43	17.03	19.23	20.32	25.43	20
20.58	17.78	19.78	21.78	23.38	25.58	26.67	31.78	30
26.93	24.13	26.13	28.13	29.73	31.93	33.02	38.13	40
33.28	30.48	32.48	34.48	36.08	38.28	39.37	44.48	50
39.63	36.83	38.83	40.83	42.43	44.63	45.72	50.83	60
52.33	49.53	51.53	53.53	55.13	57.33	58.42	63.53	80
65.03	62.23	64.23	66.23	67.83	70.03	71.12	76.23	100
77.73	74.93	76.93	78.93	80.53	82.73	83.82	88.93	120

Notes

- 1) Dimensions are in millimeter. / 単位:mm
- 2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差
Less than 10 / 0~10未満 ±0.2
10 ~ 50 / 10~50未満 ±0.25
50 or more / 50以上 ±0.35
- 3) Contact finish. / コンタクトの仕上げ
Under plating Nickel / ニッケルめっき下地
Contact area : Gold / 接触部:金めっき仕上げ
D : 0.25μm or more / D:0.25μm以上
Terminal area : Tin-copper / テール部:錫銅めっき仕上げ
- 4) F:RoHS compliant / RoHS対応
- 5) This drawing is based on 60 pin contacts. / 本図は60極で記載したものである。
- 6) A reference drawing of P.W.B. / 参考基板設計要領
Board thickness / 適合基板 : 1.6^{+0.2}_{-0.1}
(Connector mounting side / コネクタ搭載面)

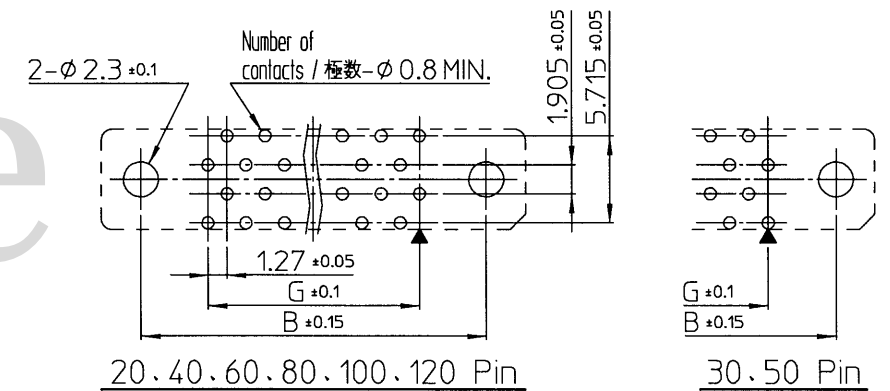

3	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅めっき
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	See Note 3
1	Insulator インシュレータ	1	Glass-filled PPS, UL94V-0 PPS ガラス繊維入り UL94V-0	Natural(Brown) ナチュラル(茶色)
No.	Component 部品	Quantity 数量	Material 材質	Finish 仕上げ

△ ×				
△ ×				
△ ×				
Apr.12,2021	N. Saito	G. Inagawa	T. Mogami	Revised for style change./様式変更の為、改版。
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY Y.Azuma	DATE Dec.10,2004	CHECKED BY S.Kitamura	DATE Dec.10,2004
			APPROVED BY A.Shimada	DATE Dec.13,2004
			SCALE	2:1
MATERIAL	TITLE			KEL CORPORATION
FINISH	8901-□□□-177SD-B-F			DRAWING No.
				P39658
				REVISION
				2