

Part Number: 22281150

Product Description: KK 254 Breakaway Header, Right-Angle with Friction Lock, 15 Circuits, Tin (Sn) Plating


Series Number: 42228

Status: Active

**Product Category: PCB Headers and** 

Receptacles

Engineering Number: 42228-0015

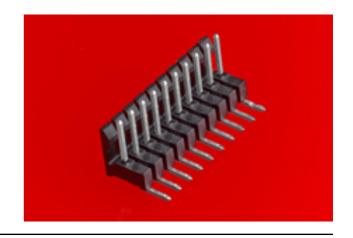

#### **Documents & Resources**

#### **Drawings**

<u>022281150\_sd.pdf</u> PK-40873-0056-001.pdf

#### 3D Models and Design Files

022281150\_stp.zip

# Specifications

PS-10-07-001.pdf

# **Product Environment Compliance**

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	<b>©</b>
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2- 21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

# EU RoHS Certificate of Compliance

# **Part Details**

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	42228
Description	KK 254 Breakaway Header, Right- Angle with Friction Lock, 15 Circuits, Tin (Sn) Plating
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Name	KK 254
UPC	800753802315

## Agency

CSA	LR19980
UL	E29179

#### **Electrical**

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

# **Physical**

Breakaway	Yes
Circuits (Loaded)	15
Circuits (maximum)	15
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No

Lock to Mating Part	Yes
Material - Plating Mating	Tin
Net Weight	2.405/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Bag
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

### **Solder Process Data**

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

# Mates With / Use With

## Mates with Part(s)

Description	Part Number
KK 254 Single Row Crimp Housings	<u>2695</u>
KK 254 PC Board Connector	<u>4455</u>
KK 254 Receptacle Housings	7880