
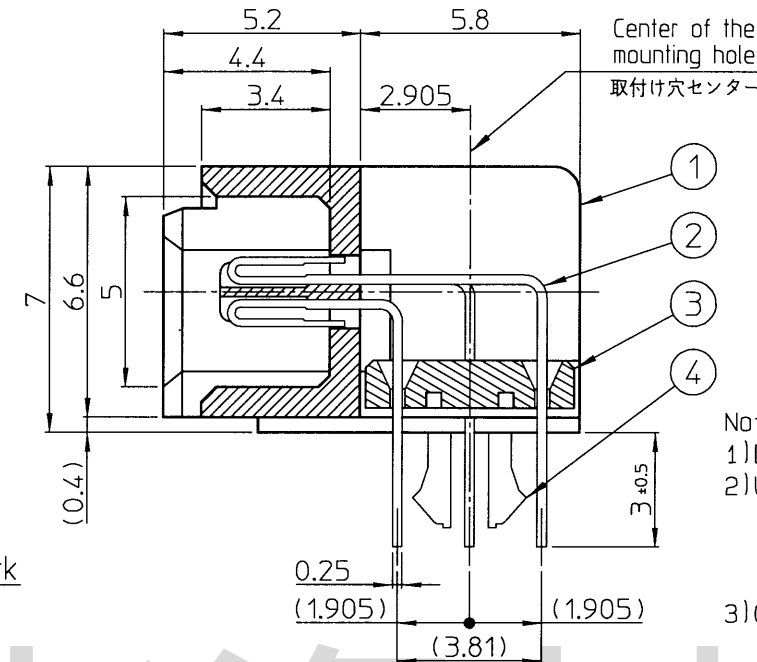


H	G	F	E	D	C	B	A	Number of contacts 極数
14.23	11.43	13.13	15.83	17.43	18.83	20.32	25.43	20
20.58	17.78	19.48	22.18	23.78	25.18	26.67	31.78	30
26.93	24.13	25.83	28.53	30.13	31.53	33.02	38.13	40
33.28	30.48	32.18	34.88	36.48	37.88	39.37	44.48	50
39.63	36.83	38.53	41.23	42.83	44.23	45.72	50.83	60
52.33	49.53	51.23	53.93	55.53	56.93	58.42	63.53	80
65.03	62.23	63.93	66.63	68.23	69.63	71.12	76.23	100
77.73	74.93	76.63	79.33	80.93	82.33	83.82	88.93	120

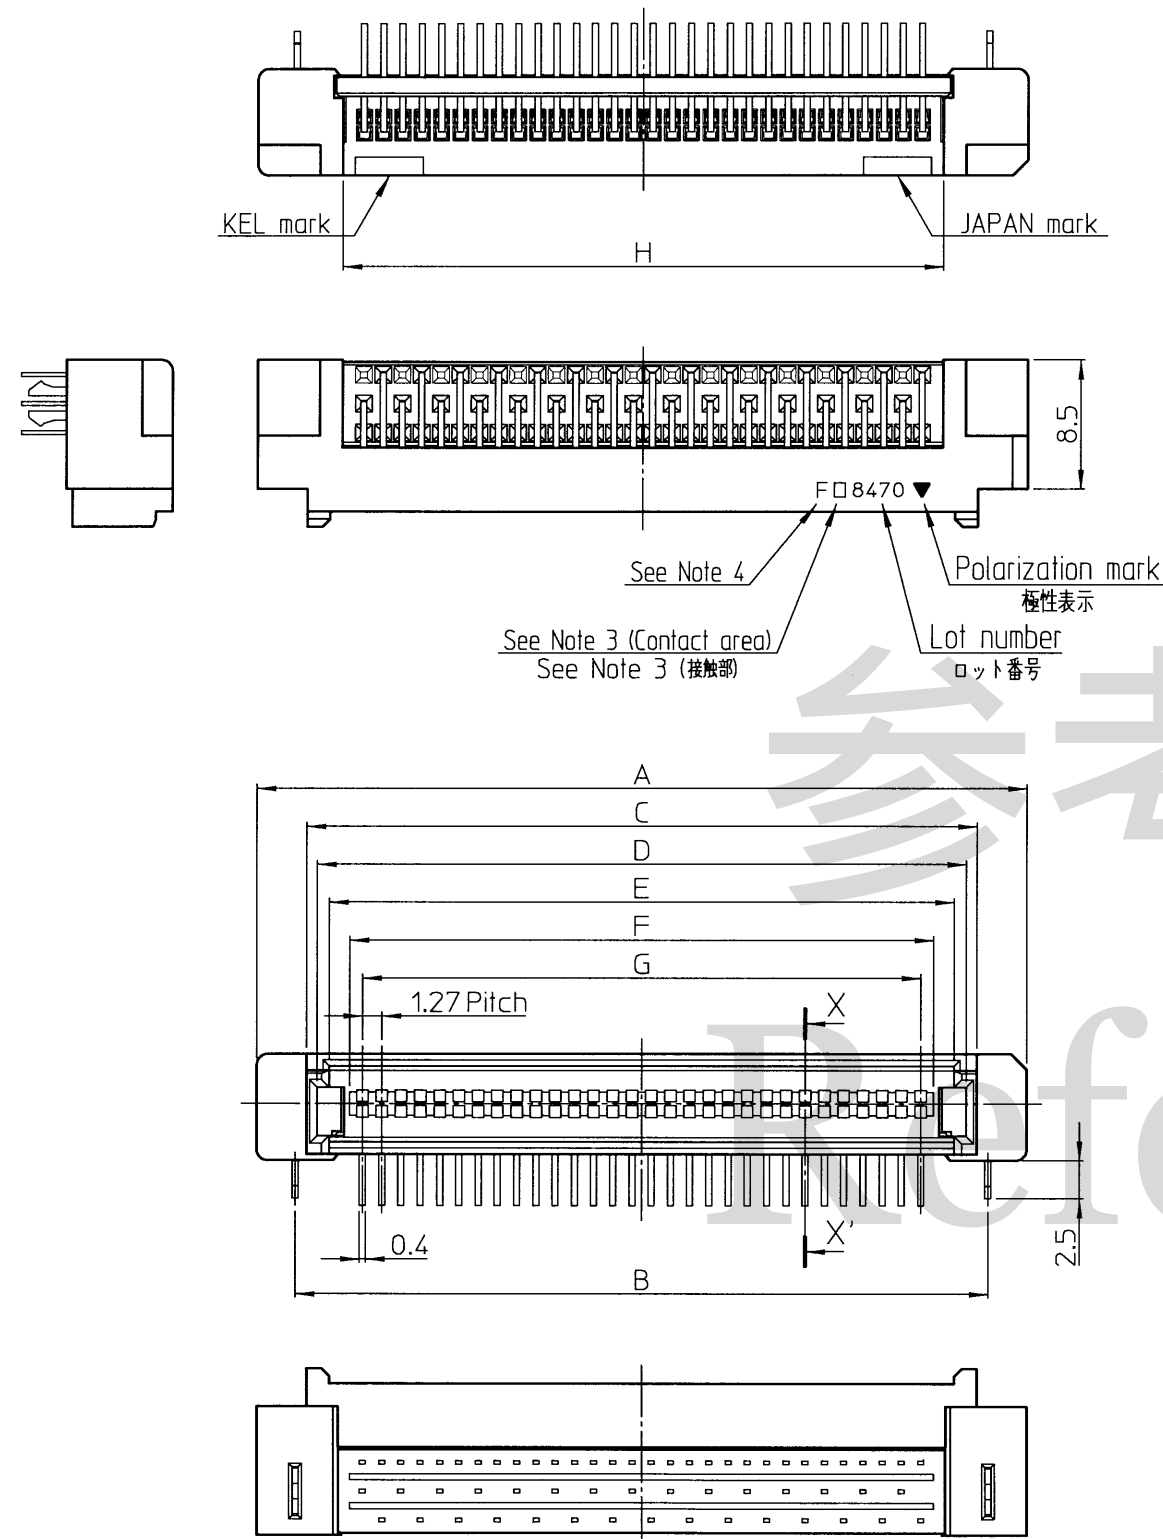

X-X' Cross-section (Scale 5 : 1)
X-X'断面(5:1)

Notes

1)Dimensions are in millimeter./ 単位:mm

2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more	/	50以上	±0.35
------------	---	------	-------

3) Contact finish./ コントクトの仕上げ

Under plating Nickel / ニッケルめっき下地

Contact area : Gold / 接触部:金めっき仕上げ

None : 0.05 μ m or more / 無:0.05 μ m以上

D : 0.25 μ m or more / D:0.25 μ m以上

Terminal area : Gold(0.03 μ m or more) / テール部:金めっき仕上げ(0.03 μ m以上)


4) F: RoHS compliant / RoHS対応

5) This drawing is based on 60 pin contacts. / 本図は60極で記載したものである。

6) A reference drawing of P.W.B. / 參考基板設計要領

Board thickness / 適合基板 : $1.6^{+0.2}_{-0.1}$

(Connector mounting side / コネクタ搭載面)

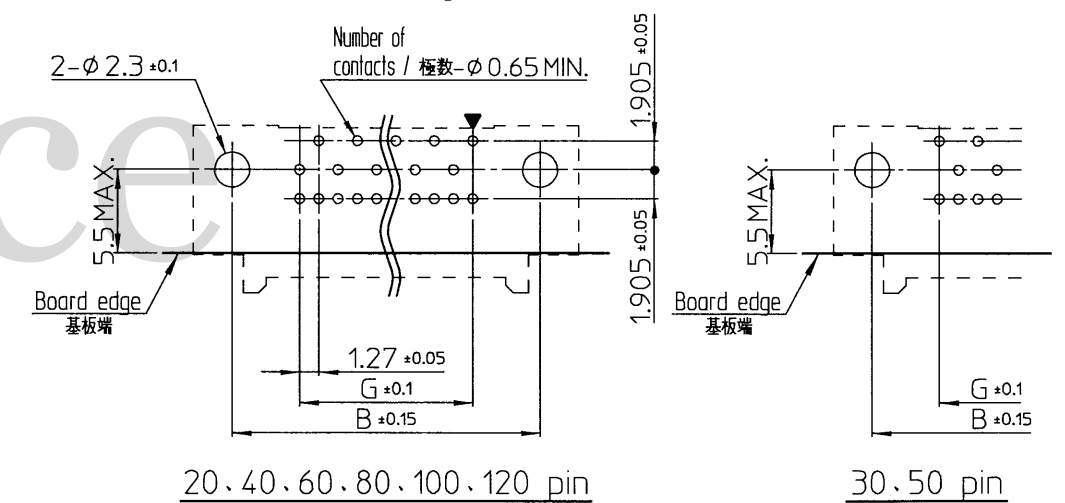

4	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅めっき
3	Alignment plate 補正板	1	Glass-filled Nylon 66, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒色
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	See Note 3
1	Insulator インシュレータ	1	Glass-filled PPS, UL94V-0 PPS ガラス繊維入り UL94V-0	Natural(Brown) ナチュラル(茶色)
No.	Component 部品	Quantity 数量	Material 材質	Finish 仕上げ

△ ×			
△ ×			
△ ×			
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY T. Megami	DATE Oct. 10, 2018	CHECKED BY N. Smith
		DATE Oct. 11, 2018	APPROVED BY M. Smith
			DATE Oct. 11, 2018
			SCALE 2:1
MATERIAL	TITLE		KEL CORPORATION
FINISH	8911-□□□-178L□-F		DRAWING No.
			P3D851
			REVISION 1