

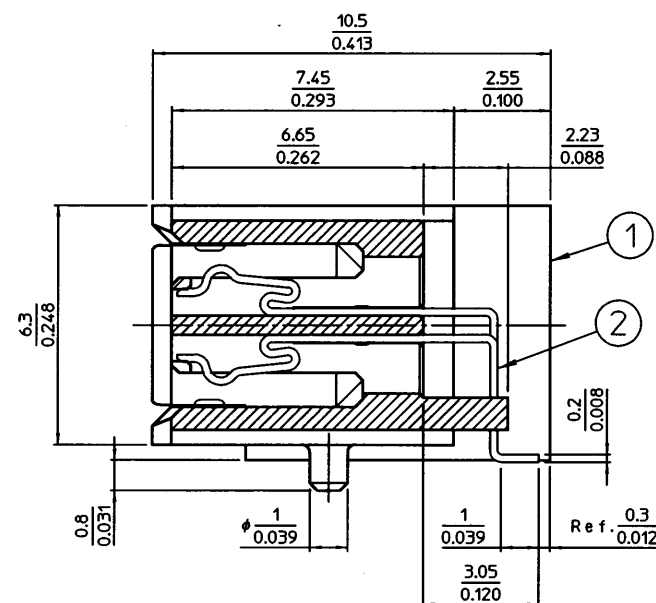
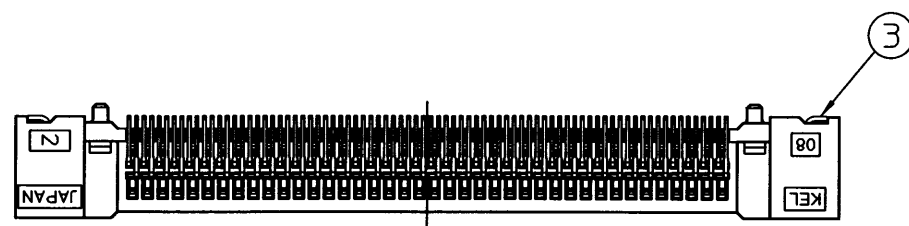
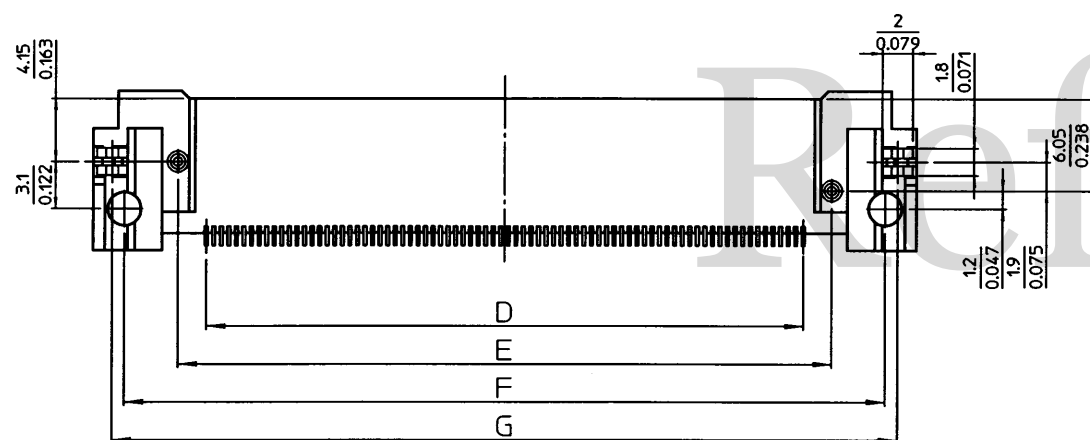
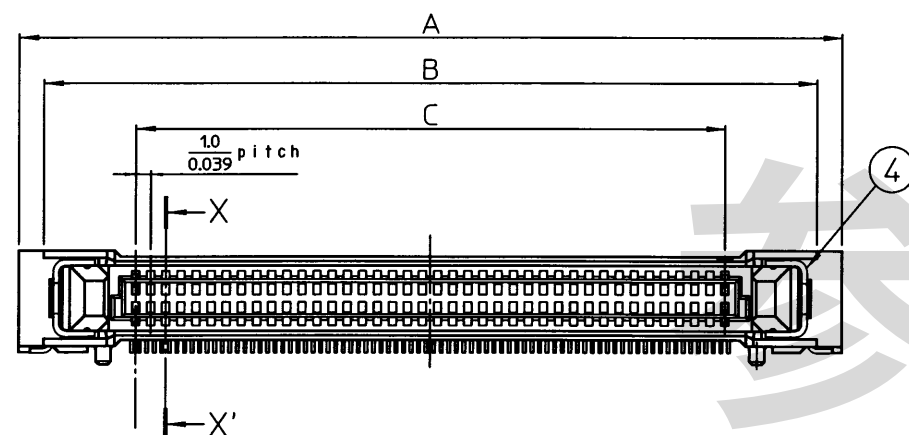
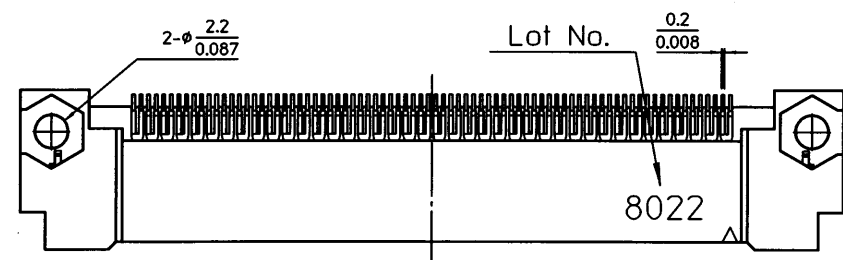


P3A426

No.

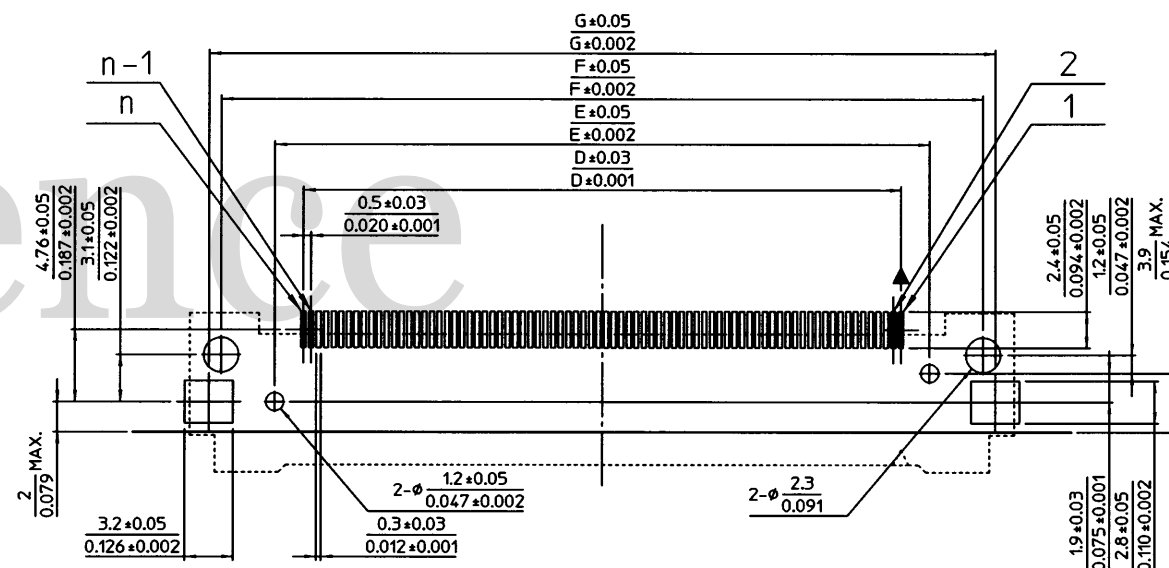

X-X' Cross-section (5:1)



A reference drawing of P.W.B. (Connector side)

G	F	E	D	C	B	A	No. of Contact
31.98 (1.259)	30.36 (1.195)	23.28 (0.917)	19.50 (0.768)	19.00 (0.748)	31.20 (1.228)	34.50 (1.358)	40
36.98 (1.456)	35.36 (1.392)	28.28 (1.113)	24.50 (0.965)	24.00 (0.945)	36.20 (1.425)	39.50 (1.555)	50
41.98 (1.653)	40.36 (1.589)	33.28 (1.310)	29.50 (1.161)	29.00 (1.142)	41.20 (1.622)	44.50 (1.752)	60
51.98 (2.046)	50.36 (1.983)	43.28 (1.704)	39.50 (1.555)	39.00 (1.535)	51.20 (2.016)	54.50 (2.146)	80

NOTES

- 1) Dimensions are in millimeters.
- 2) Inch equivalents are in parentheses or below the metric dimensions.
- 3) Unless otherwise specified, tolerance shall be:

Less than 10	$\pm$ 0.20	(Less than 0.394)	$\pm$ 0.008
10~50	$\pm$ 0.25	(0.394 ~ 1.969)	$\pm$ 0.010
50 or more	$\pm$ 0.30	(1.969 or more)	$\pm$ 0.012
- 4) Contact finish
Under plating Nickel
Contact area Gold (Au 0.1 μ m or more)
Terminal area Gold (Au 0.03 μ m or more)
- 5) This drawing is based on 80 pin contacts.
- 6) Retention clips are to be soldered and fixed by screws without fail at time of mounting hardware on P.W.B.
Recommended hexagon nut: M2 (JIS B 1181)
- 7) Coplanarity of contact tail and clips is 0.1 (0.004) MAX.
- 8) A reference drawing of P.W.B.

Δ x					
Δ x					
Δ x					
Δ x					
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION		
THIRD ANGLE PROJECTION	DRAWN BY Y. Kuwahara May. 15, 2007	DATE CHECKED BY N. Saito Jun. 26, 2007	DATE APPROVED BY A. Shimada Jun. 26, 2007	DATE SCALE	2:1
MATERIAL	TITLE				
FINISH	DJ34-000L-F				
KEL CORPORATION				DRAWING No.	P3A426
				REVISION	1

4	Flame ground	2	Copper alloy	Nickel
3	SMT Retention clip	2	Copper alloy	Gold
2	Contact	No. of Contact	Copper alloy	SEE NOTE 4
1	Insulator	1	Glass-filled L.C.P.(UL94V-0) black	—
No.	Component	Quantity	Material	Finish