

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2017


© COPYRIGHT 2002 BY TE CONNECTIVITY

ALL RIGHTS RESERVED.

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER E-20-009825	29JUN2020	PMV	IG
	D1	REVISED PER PCN-22-157426	03NOV2022	MR	IG
	D2	REVISER PER PCN-23-185791	11AUG2023	MR	IG
	D3	REVISED PER PCN-24-198437	24JAN2024	AJ	CB

PART NUM.
MODIFICATION


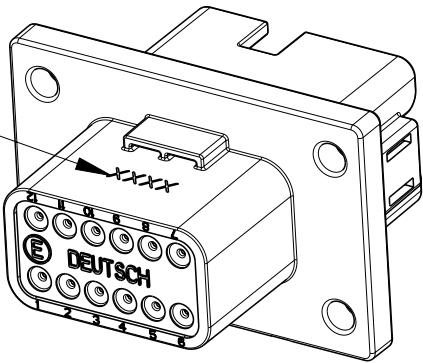


SCALE 1:1

3-DIMENSIONAL VIEW

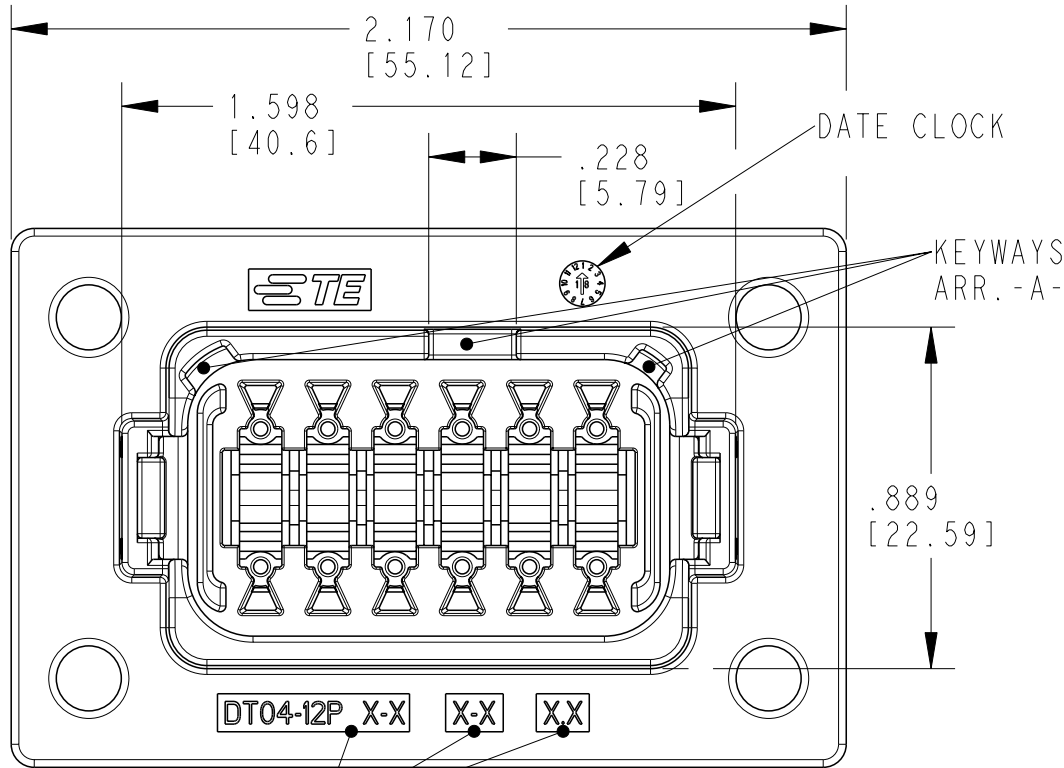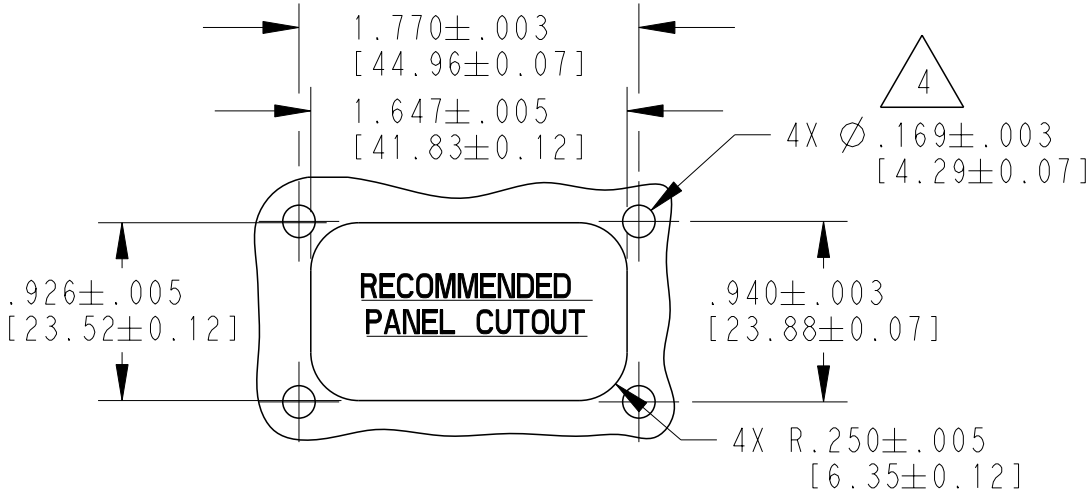

TRACEABILITY
CODING

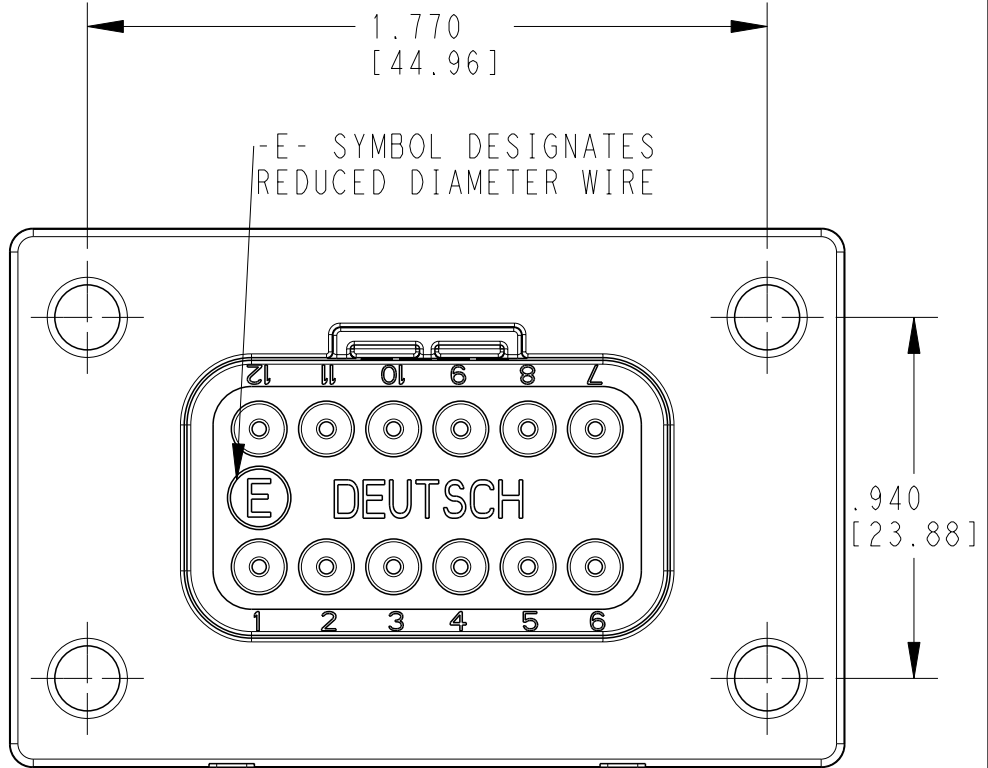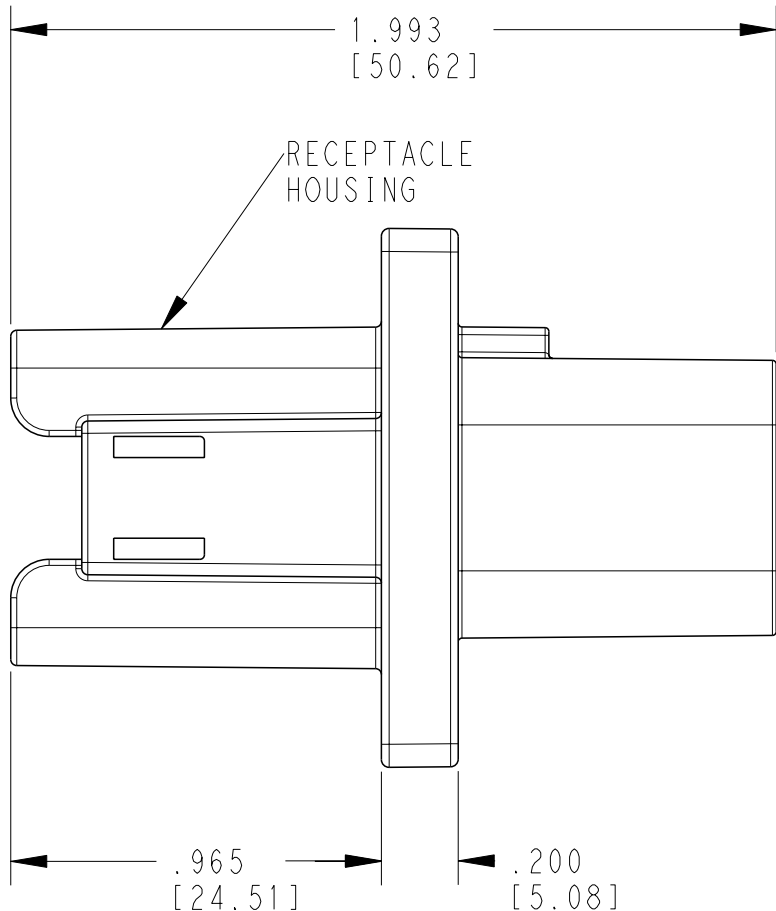

5. SECONDARY WEDGE LOCK SOLD SEPARATELY: W12P-XXXX.
(XXXX = ALL MODIFICATIONS)


4 RECOMMENDED SCREW: 6-32 [M4].
RECOMMENDED TORQUE: 20-25 IN-LB [2.26-2.82 Nm].

3 MATERIAL - HOUSING: PA66 GF15 (BLACK)
GROMMET: VMQ (BURNT RED)

2. THIS RECEPTACLE MATES WITH DT06-12SA-XXXX PLUG.
(A KEY; XXXX = ALL MODIFICATIONS)
CONSULT FACTORY FOR MODIFICATIONS.

NOTES: 1 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION
CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

TE INTERNAL PN		DEUTSCH PN	
DT04-12PA-BL06		DT04-12PA-BL06	
CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm ²] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.0-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.YOHANNES 16APR2002		 TE Connectivity			
DIMENSIONS: INCHES [mm]		CHK R.MCCORD 04MAY2010					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0° 30' 0"	APVD S.BEARD 04MAY2010		NAME 12 WAY RECEPTACLE WITH ENCHANCED KEY AND FLANGE, KEY ARR -A-, -BLO6 MOD DT SERIES			
		PRODUCT SPEC 108-151009					
		APPLICATION SPEC 114-151009					
		WEIGHT 30.51g					
MATERIAL 	FINISH	CUSTOMER DRAWING		SIZE A3	CAGE CODE 4AFU8	DRAWING NO G-DT04-12PA-BL06	RESTRICTED TO -
				SCALE 2:1	SHEET 1 OF 1	REV D3	