

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY to CUT BLUNT, GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: , 15240mm, GlobTek Cool Gray	
	Model No. Power Cord	
	Part No./Ordering No. 30110450F000-GY	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name: _____

Customer P/N: _____

Quote Number: _____

Date: _____

Authorized Representative Name: _____

Authorized Representative Signature: _____

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY to CUT BLUNT, GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: , 15240mm, GlobTek Cool Gray		
	Model No. Power Cord		
	Part No./Ordering No. 30110450F000-GY		Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
A1	REDRAW	DR	01/27/2022	QA
A	INITIAL RELEASE	DR	10/17/2002	QA


Cordset Information:
CordsetColor:GlobTek Cool Gray
Cord Length (mm):15240

NOTES:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY to CUT BLUNT, GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: , 15240mm, GlobTek Cool Gray	
	Model No. Power Cord	
	Part No./Ordering No. 30110450F000-GY	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

END A

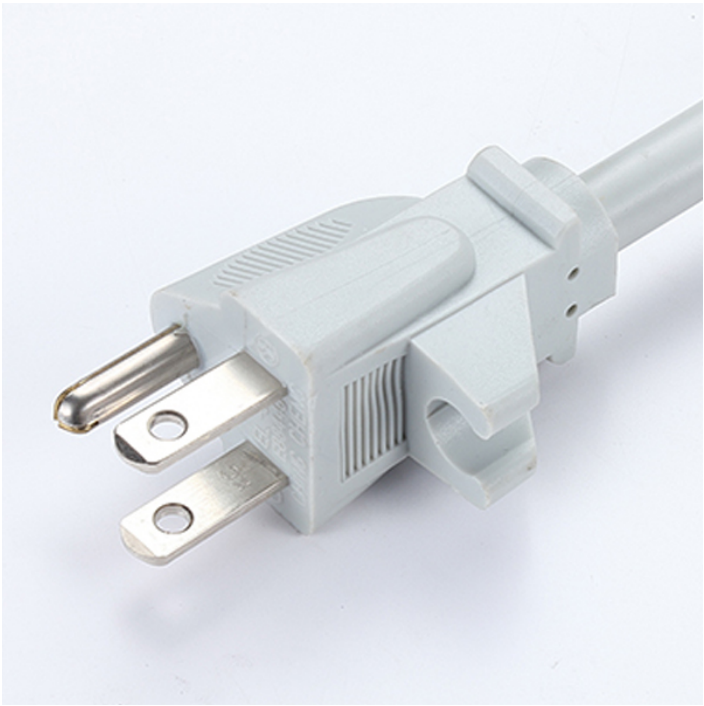





END B

CABLE CUT BLUNT

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY to CUT BLUNT, GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: , 15240mm, GlobTek Cool Gray	
	Model No. Power Cord	
	Part No./Ordering No. 30110450F000-GY	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE


End A Code:302CGGY Description:NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY Rating (V):125 Rating (A):15.0 Gender:Male Overmolded:Yes	Cable Code:136GY Description:GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: Color:GlobTek Black Wire Gauge(AWG):14 Cond:3 Type:SJT FT3 VW-1 Temperature:60° C Amps:15 Volts:250 OD:9.3 ConductorsColors:BLK/WHT/GRN	End B Code:CUT BLUNT Description:CUT BLUNT Rating (V): Rating (A): Gender:N/A Overmolded:No
Overall cable rating:15A 125VAC		
Plug Approvals	Cable Approvals	Connector Approvals
 OR  Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, andf cables total up to a UL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	 OR  Note: North American power cords are certified as CSA assemblies of UL rated parts, so, the combination of UL or certified plugs, connectors, andf cables total up to a UL CUL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL	UL CSA or CUL Note: North American power cords are certified as UL or CSA assemblies of UL rated parts, so, the combination of UL or certified plugs, connectors, andf cables total up to a UL CUL approved cordset or cable assembly LINK TO CERTs Link to live Power Cords listing @ UL Link to live Flexible Cord listing @ UL
AGENCY ONLINE DOCUMENTS		
http://en.globtek.com/cordsets/		

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG with Cord Grip GREY to CUT BLUNT, GT Cable #136GY: 14 / 3 Conductors, 9.3mm OD, SJT FT3 VW-1, 60 Deg.C, 250V, BLK/WHT/GRN, Approvals: , 15240mm, GlobTek Cool Gray	
	Model No. Power Cord	
	Part No./Ordering No. 30110450F000-GY	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:Coiled cable 1
Description:Coiled; secured with twist tie
Image:

L1 (A End)	L2 (B End)	D1 / D2
30 ± 15 (cm)	30 ± 15 (cm)	25 ± 5 (cm)

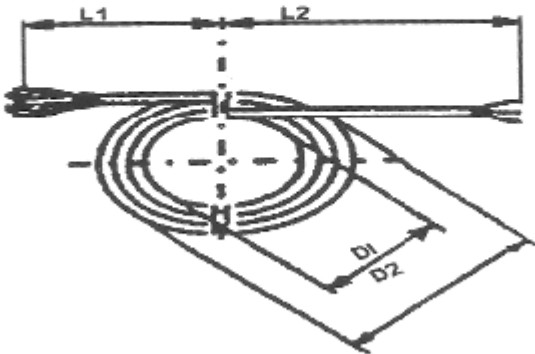

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):