
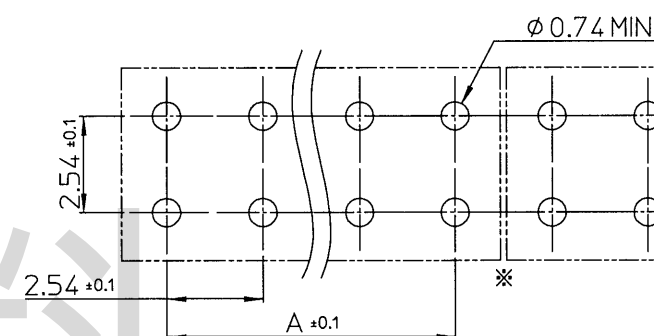


B	A	No. of contacts 極数
2.54	—	2
5.08	2.54	4
7.62	5.08	6
10.16	7.62	8
12.70	10.16	10
15.24	12.70	12
17.78	15.24	14
20.32	17.78	16
25.40	22.86	20
38.10	35.56	30
76.20	73.66	60

NOTES

1. Unless otherwise specified
tolerance shall be: / 指定なき寸法公差: ± 0.2

2. A reference drawing of P.W.B. / 参考基板設計要領

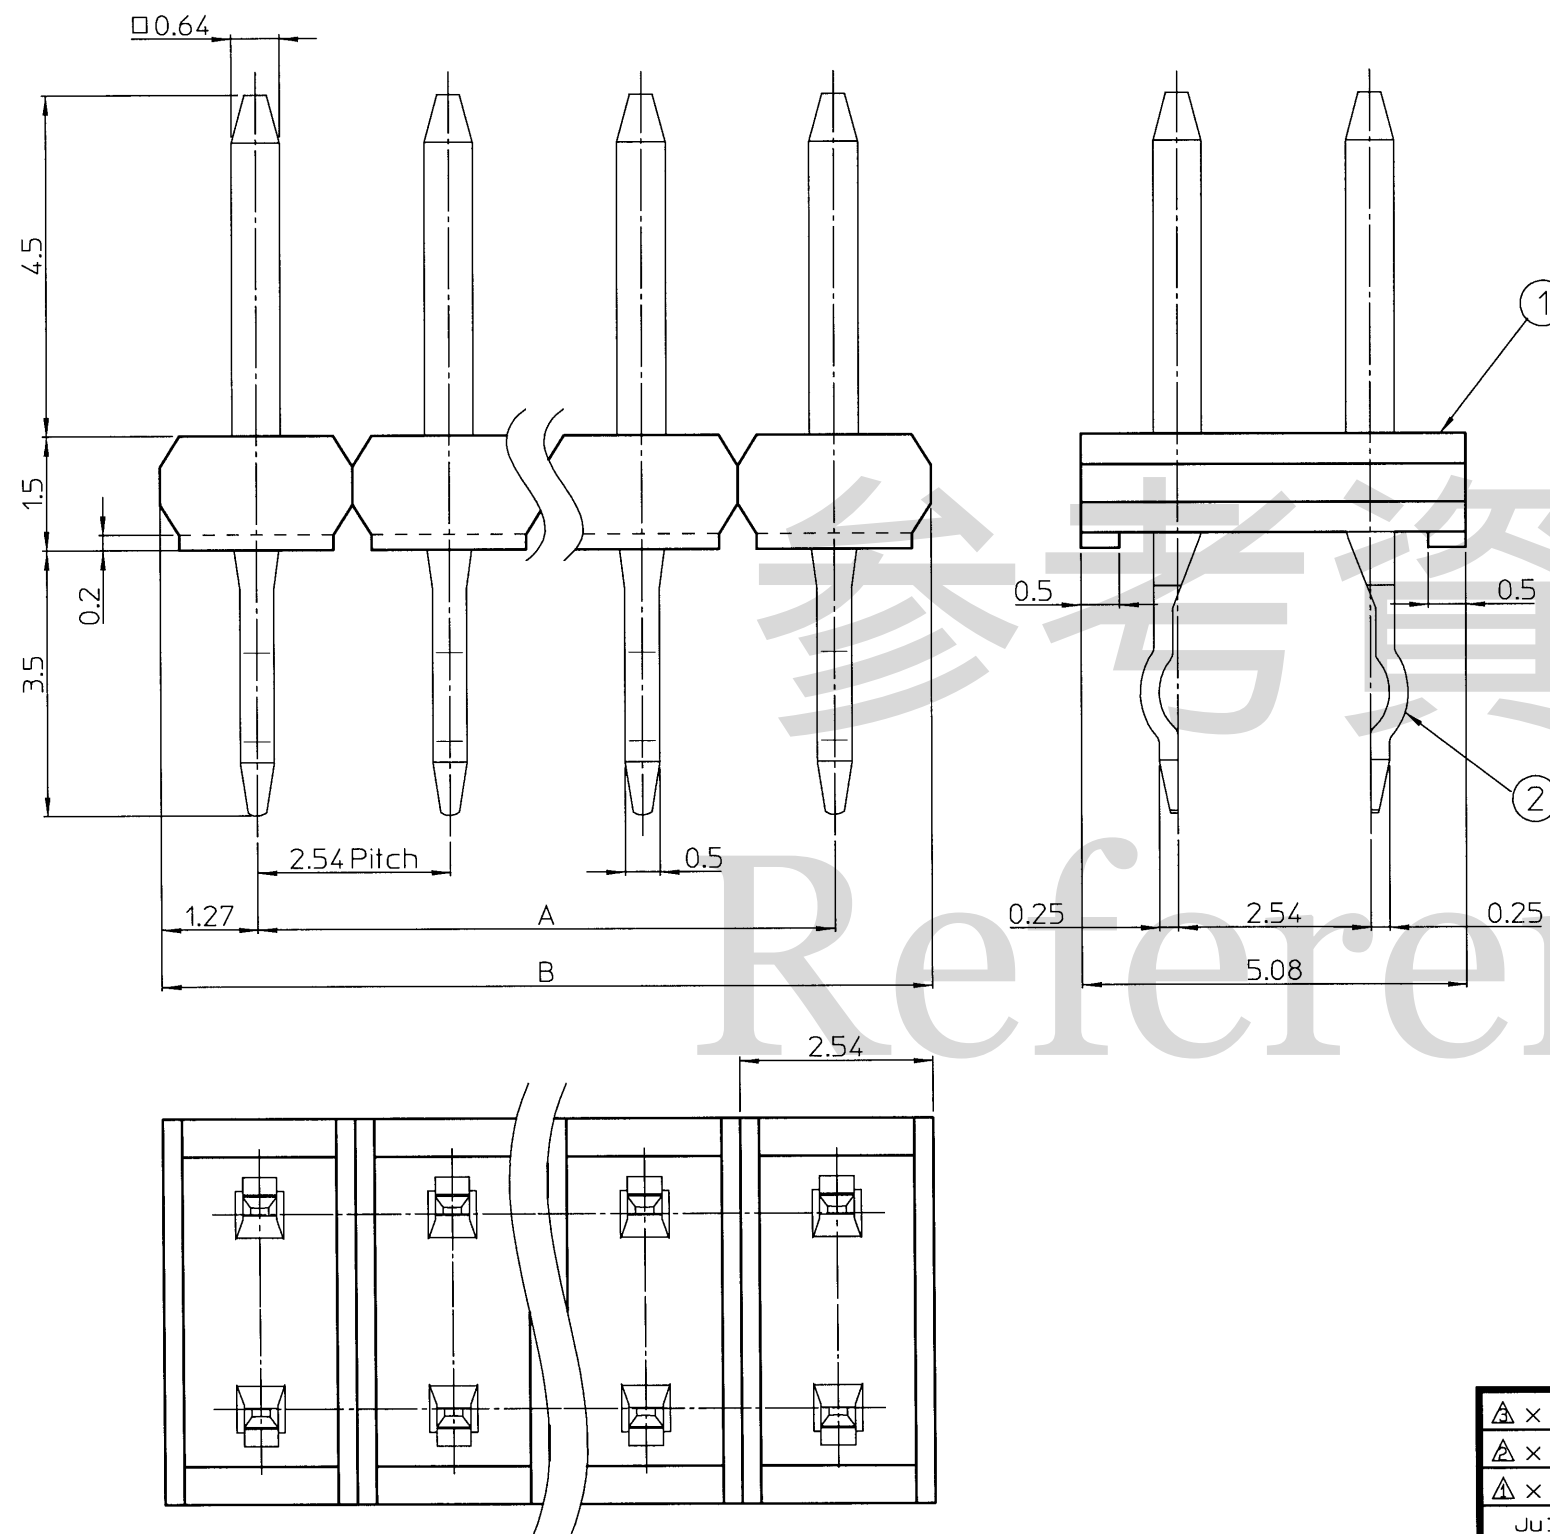

※Possible to use continuous / 連続使用可

3. Contact finish. / コンタクト仕上
Under plating Nickel / ニッケルメッキ下地
Gold plating / 金メッキ仕上

4. Part Number / 品名コード

DSP02 - 000 - 431 G

Contact finish / コンタクト仕上
G: Gold plating / 金メッキ仕上

Contact name / コンタクト名

Number of contacts / 極数

002: 2 pins / 2極 004: 4 pins / 4極
006: 6 pins / 6極 008: 8 pins / 8極
010: 10 pins / 10極 012: 12 pins / 12極
014: 14 pins / 14極 016: 16 pins / 16極
020: 20 pins / 20極 030: 30 pins / 30極
060: 60 pins / 60極

Series name / シリーズ名
Dual inline plug / 2列プラグ、オス側

2	Contact コンタクト	Number of contacts 極数	Brass 黄銅	SEE NOTE3
1	Insulator インシュレータ	1	Glass-filled Nylon 66, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒色
No.	Component 名称	Quantity 数量	Material 材質	Finish 仕上

△ ×					
△ ×					
△ ×					
Jul. 19. 2021	N. Saito	T. Mogami	K. Shimada	Revised for style change./様式変更の為、改版.	
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY T. Sakai	DATE Nov. 30. 1983	CHECKED BY	DATE A. Oshitani Dec. 22. 1983	SCALE 10 : 1
					UNIT mm
MATERIAL	TITLE			KEL CORPORATION	
FINISH	DSP02-000-431G			DRAWING No. P33732	
				REVISION 2	