

NOTES

1.指定無き寸法公差/Unless otherwise specified.
tolerances shall be.

0~10未満/Less than 10	±0.2
10~50	±0.25
50以上/50 or more	±0.3

2. コプラナリティ/Coplanarity

コンタクト及び固定金具のテール部バラツキ:0.1mm以下
/Variation of tail in contact
and Retention clip:0.1mmMAX.

3. 本図は、DT11-060S-20-Tで記載したものである。
/This drawing is based on DT11-060S-20-T

NOTES

4.品名オーダーコード/Coding rules for Part Number

DT10 - 00

- T:防塵テープ付き
/with Dustproof Tape

高さ/Stacking Height
19mm 20:20mm

Shape of Tail
タイプ/Straight Type

contacts	以
040:40極/40Pin	/T
080:80極/80Pin	F
n	
n(20mmに適用/Apply to 20mm)	
n	

— シリーズ名/Series Name

DT10: プラグ ボス無し/Plug without Boss
DT11: プラグ ボス有り/Plug with Boss







ピン配列/Pin assignment

100Ω差動インピーダンスマッチングの為
以下のピン配列を推奨致します。
/To match 100 ohm differential impedance,
pin assignment mentioned below is recommended.

シリアルATA向け
/For Serial ATA

 差動ペア/Diff pair

● グラウンド/Ground pin

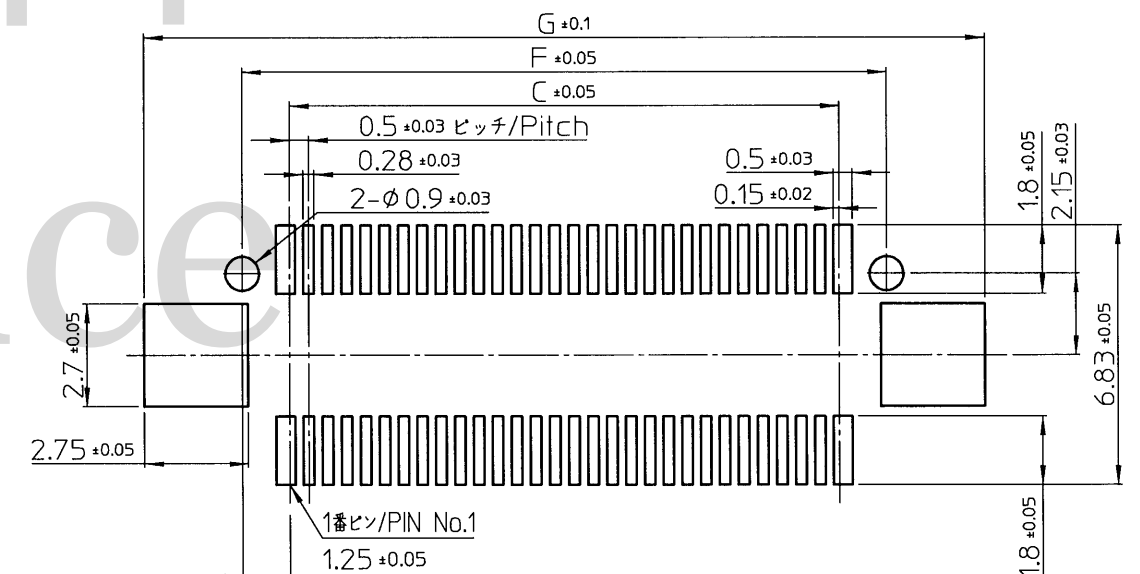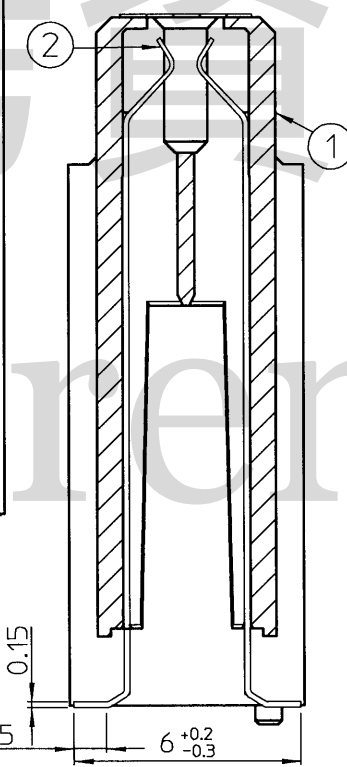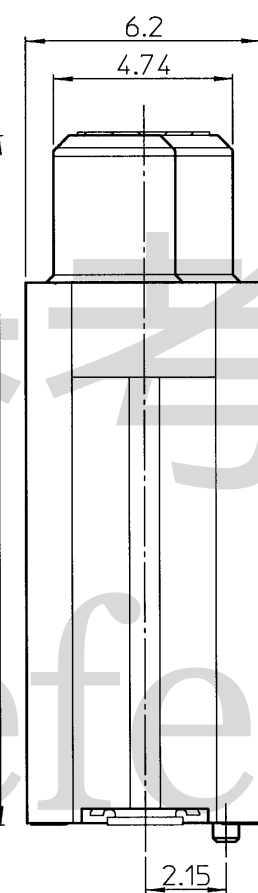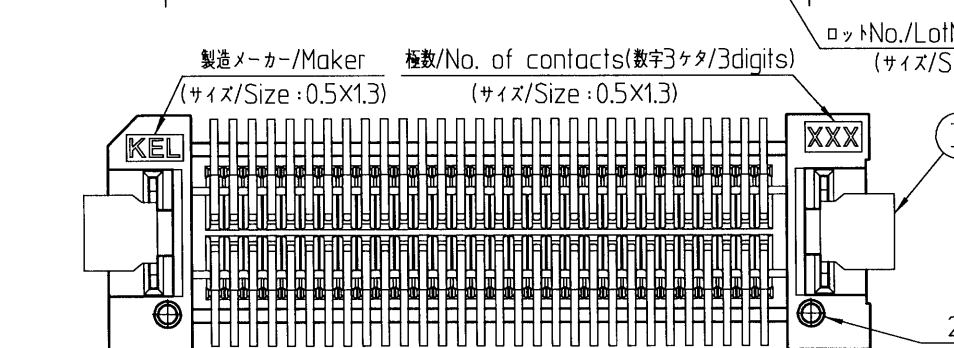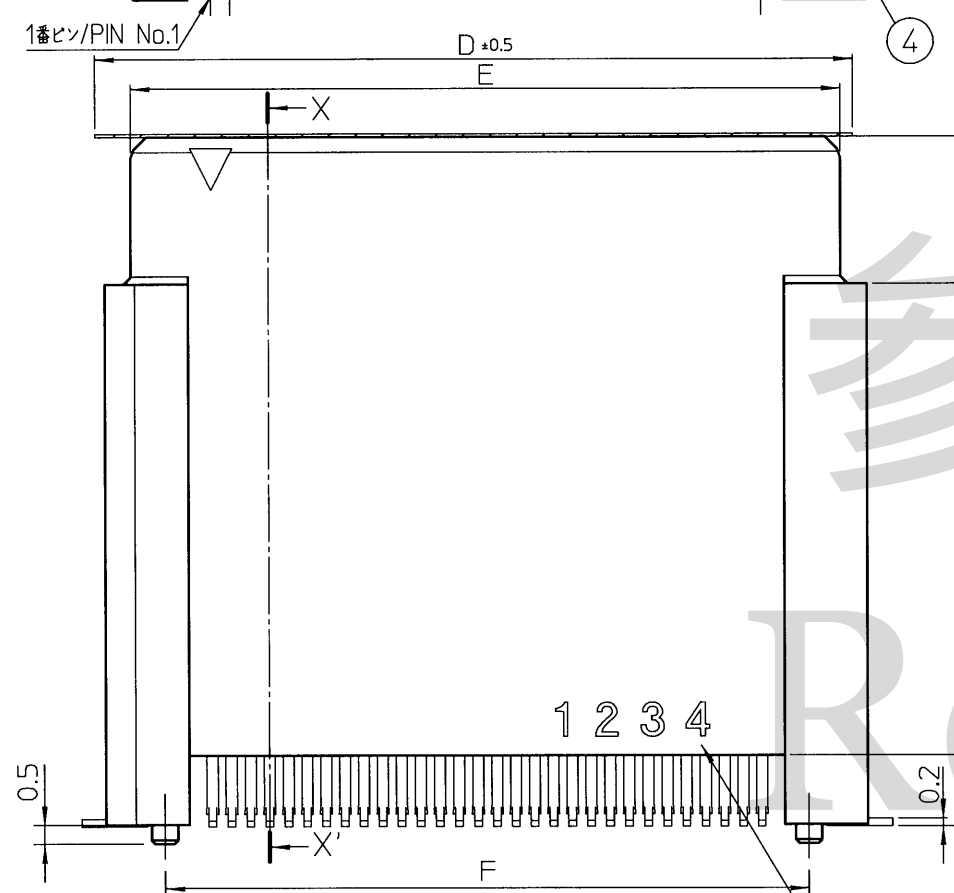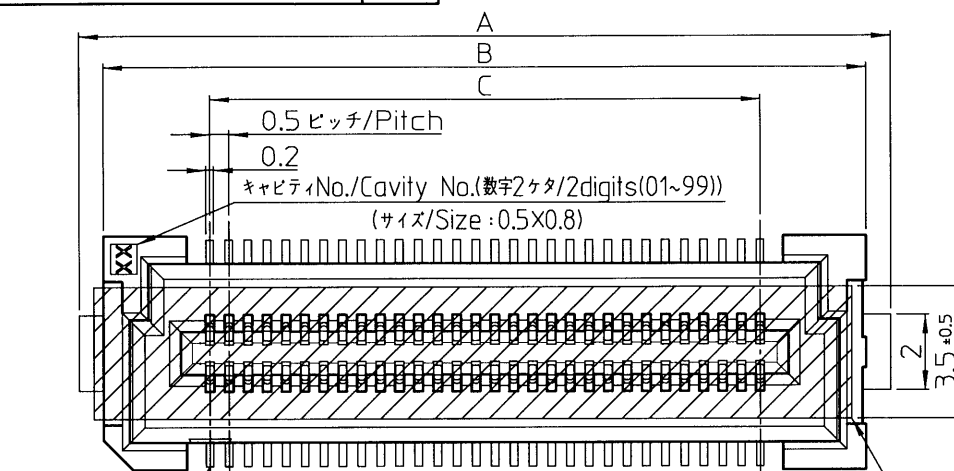

参考基板設計要項（コネクタ搭載面）

A reference drawing of P.W.B (Connector mounting side)

$\Delta \times$					
$\Delta \times$					
$\Delta \times$					
Dec 2.2021	M.Koizumi	J.Tanaka	N.Takatani	120極追加のため改版。 /Added 120pin.	
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION	
THIRD ANGLE PROJECTION	DRAWN BY N.Shibazaki Jul.18,2017	DATE Jul.18,2017	CHECKED BY M.Koizumi Jul.19,2017	DATE Jul.19,2017	APPROVED BY A.Kasuga Jul.19,2017
				SCALE 5:1	UNIT mm
MATERIAL	TITLE DT1□-□□□S-19/20-T			KEL CORPORATION	
FINISH				DRAWING No. P3D464	REVISION 4