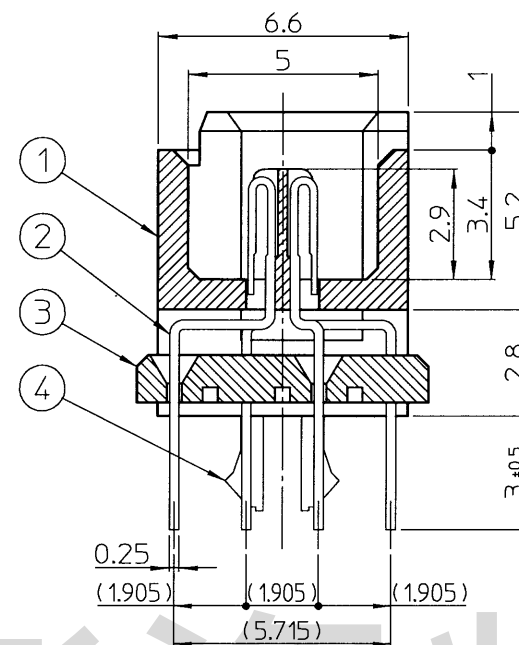
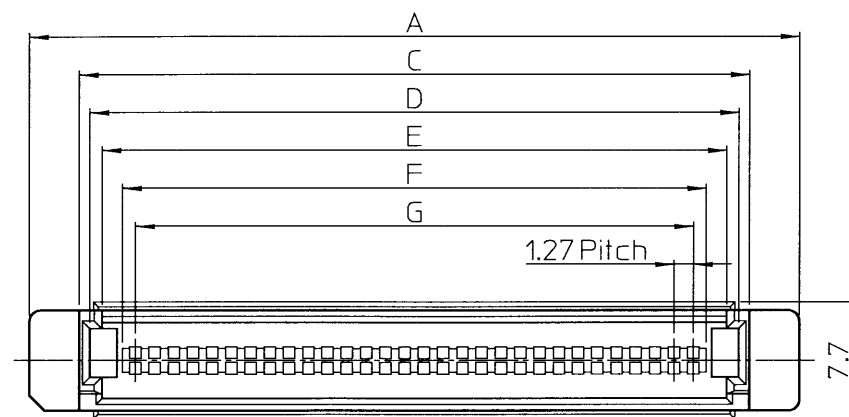
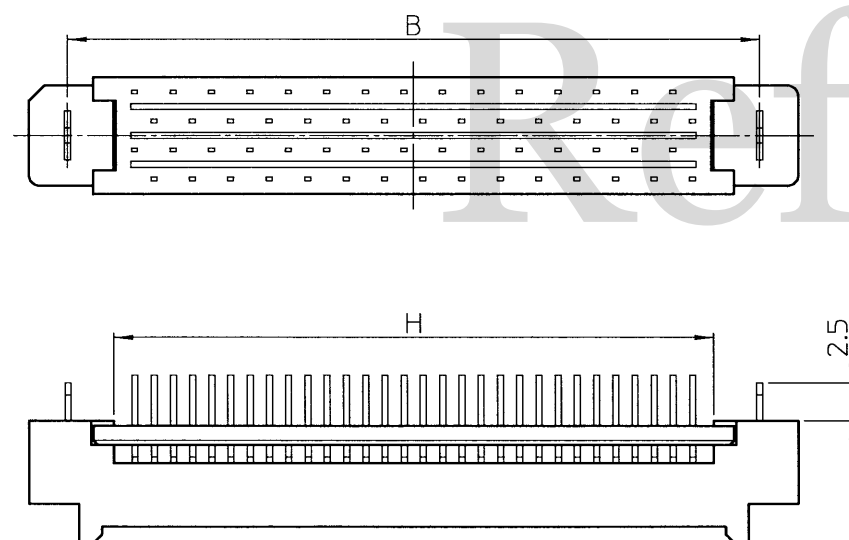
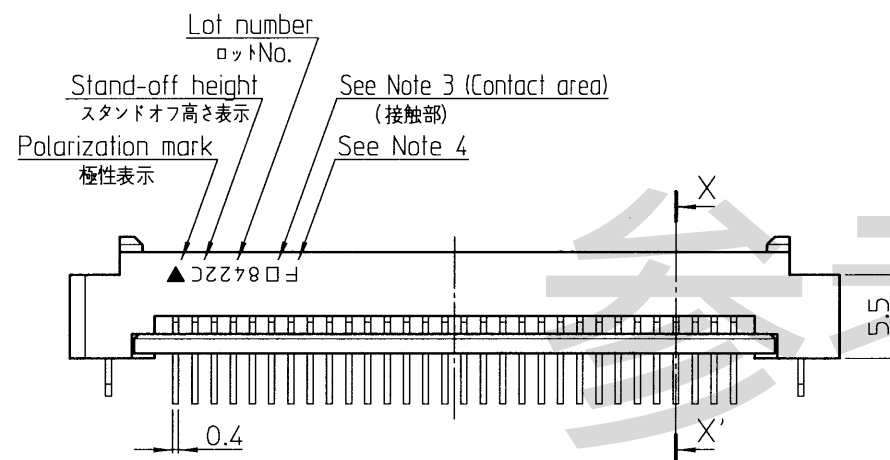



X-X' Cross-section (Scale 5:1)
X-X'断面(5:1)

Notes

- 1) Dimensions are in millimeter. / 単位:mm
2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差
Less than 10 / 0~10未満 ±0.2
10 ~ 50 / 10~50未満 ±0.25
50 or more / 50以上 ±0.35
3) Contact finish. / コンタクトの仕上げ
Under plating Nickel / ニッケルめっき下地
Contact area : Gold / 接触部:金めっき仕上げ
None : 0.05μm or more / 無:0.05μm以上
D : 0.25μm or more / D:0.25μm以上
Terminal area : Gold(0.03μm or more) / テール部:金めっき仕上げ(0.03μm以上)
4) F:RoHS compliant / RoHS対応
5) This drawing is based on 60 pin contacts. / 本図は60極で記載したものである。
6) A reference drawing of P.W.B. / 参考基板設計要領

Board thickness / 適合基板 : 1.6^{+0.2}_{-0.1}

(Connector mounting side / コネクタ搭載面)

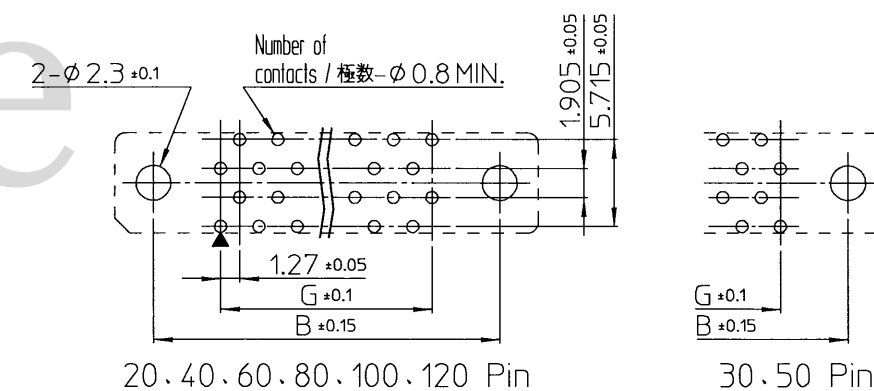

4	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅めっき
3	Alignment plate 補正板	1	Glass-filled Nylon 66, UL94V-0 66ナイロン ガラス繊維入り UL94V-0	Black 黒色
2	Contact コンタクト	Number of contacts 極数	Copper alloy 銅合金	See Note 3
1	Insulator インシュレータ	1	Glass-filled PPS, UL94V-0 PPS ガラス繊維入り UL94V-0	Natural(Brown) ナチュラル(茶色)
No.	Component 部品	Quantity 数量	Material 材質	Finish 仕上げ

△ ×							
△ ×							
△ ×							
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION				
THIRD ANGLE PROJECTION	DRAWN BY T. Moganu	DATE Sep. 12, 2018	CHECKED BY N. Saito	DATE Sep. 13, 2018	APPROVED BY M. Suzuki	DATE Sep. 13, 2018	SCALE 2:1
MATERIAL	TITLE 8911-□□□-178S□-C-F			KEL CORPORATION			
FINISH				DRAWING No. P3D828		REVISION 1	