

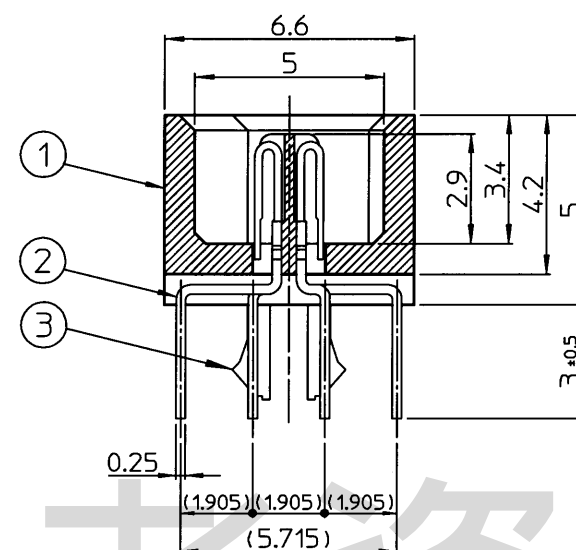
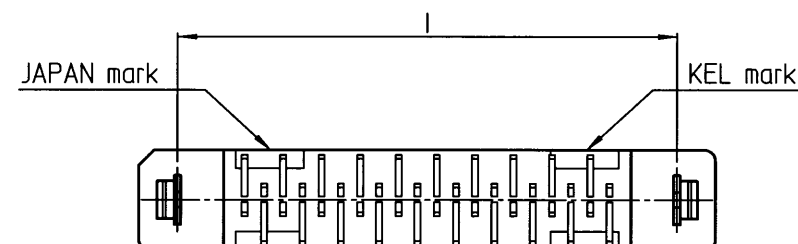
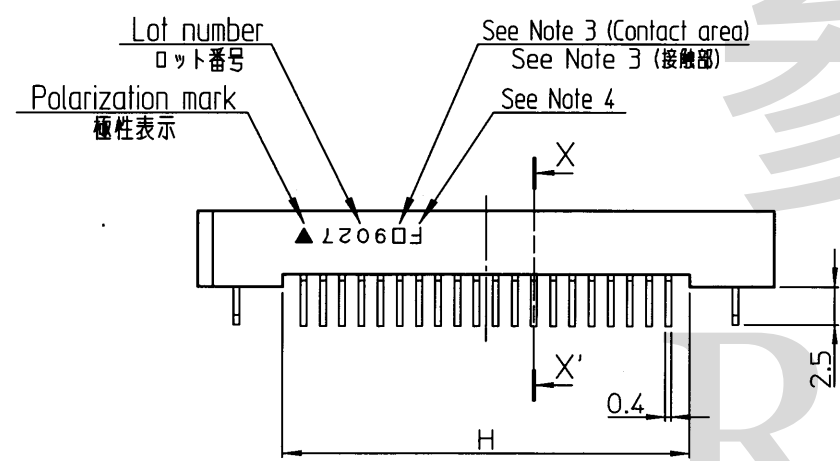


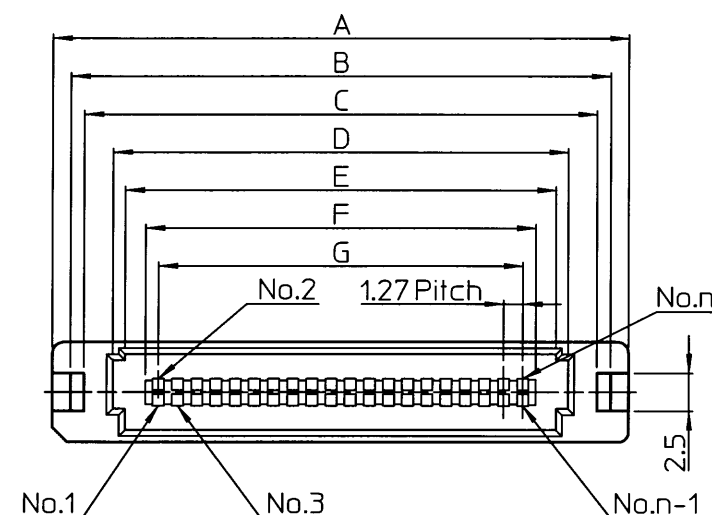

X-X' Cross-section (Scale 5:1)

Notes

- 1) Dimensions are in millimeter. / 単位:mm
2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差
Less than 10 / 0~10未満 ± 0.2
10 ~ 50 / 10~50未満 ± 0.25
50 or more / 50以上 ± 0.35
3) Contact finish. / コンタクトの仕上げ
Under plating Nickel / ニッケルメッキ下地
Contact area: Gold / 接触部: 金メッキ仕上げ
None: Au0.05 μ m or more / 無: 0.05 μ m以上
D : Au0.25 μ m or more / D: 0.25 μ m以上
Terminal area : Gold (Au0.03 μ m or more) / テール部: 金メッキ仕上げ (0.03 μ m以上)
4) F: RoHS compliant / RoHS対応
5) This drawing is based on 40 pin contacts. / 本図は40極で記載したものである。
6) A reference drawing of P. W. B. / 参考基板設計要領
Board thickness / 適合基板: 1.6 $^{+0.2}_{-0.1}$
(Connector mounting side / コネクタ搭載面)

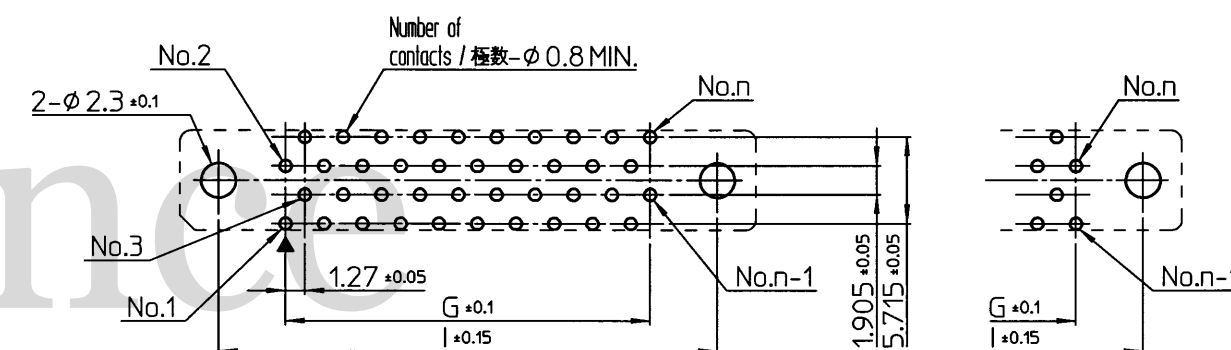

20, 40, 60, 68, 80, 100 pin

30, 50 pin

3	Mounting hardware 取付金具	2	Copper alloy 銅合金	Tin-copper plating 錫銅メッキ
2	#178 Contact #178 コンタクト	極数	Copper alloy 銅合金	See note 3
1	8930E-□□□S Insulator 8930E-□□□S インシュレータ	1	Glass-filled PPS, UL94V-0 PPS ガラス繊維入り UL94V-0	Natural (Brown) ナチュラル (茶)
No.	Component 部品	Quantity 数量	Material 材質	Finish 仕上げ

△ ×			
△ ×			
△ ×			
△ ×			
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY T. Mogami' Feb. 13, 2009	DATE Feb. 13, 2009	CHECKED BY N. Saito Feb. 13, 2009
	APPROVED BY A. Shimada Feb. 13, 2009	DATE Feb. 13, 2009	SCALE 2:1
MATERIAL	TITLE		KEL CORPORATION
FINISH	8931E - □□□ - 178S□ - F		DRAWING No. P3A865
			REVISION 1