
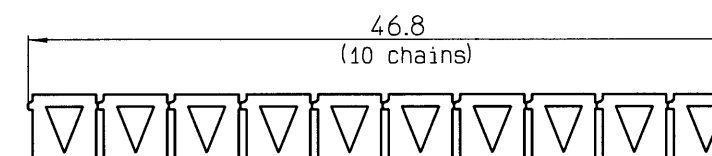


NOTES

1. Unless otherwise specified tolerance shall be: / 指定無き寸法公差
Less than 10 / 0~10未満: ± 0.2
10~50: ± 0.3


2. This Product is assembled (10 chains) like the under drawing.
本製品は下図のように(10連結にて)組立られています。

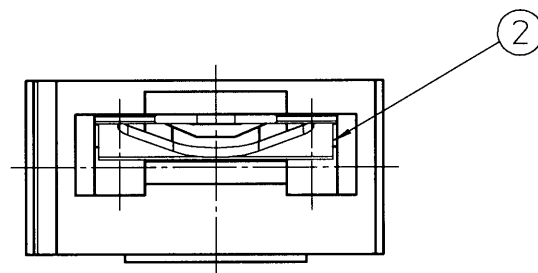



3. Contact finish. / コンタクト仕上
Under plating Nickel / ニッケルメッキ下地
Gold plating / 金メッキ仕上

4. Part number / 品名コード

DSP01 - 002 - 430 G - □
Color / 色
9: White (standard) / 白色 0: Black / 黒色
2: Red / 赤色 5: Green / 緑色
6: Blue / 青色
Contact finish / コンタクト仕上
G: Gold plating / 金メッキ仕上
Contact name / コンタクト名
Number of contacts / 極数
002: 2 pins / 2極
Series name / シリーズ名
Socket / ソケット、メス側

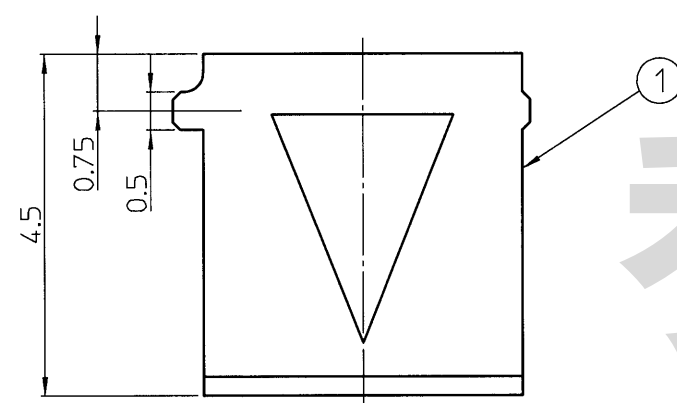

5. Combination mounting state / 組合わせ実装状態

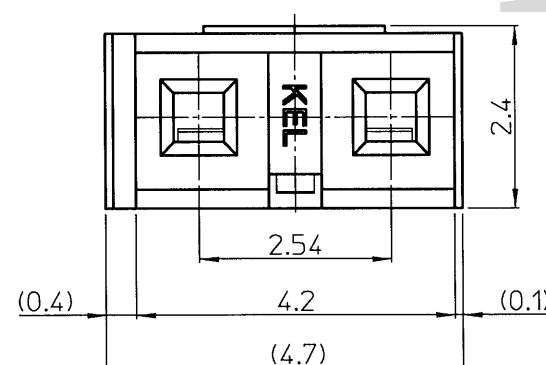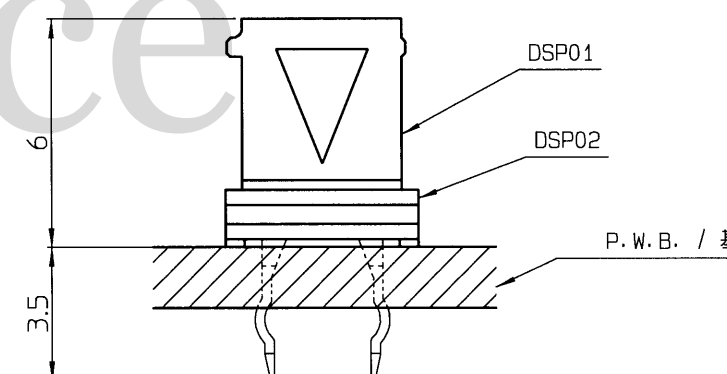

2	Contact コンタクト	Number of contacts 極数	Beryllium Copper ベリリウム銅	SEE NOTE3
1	Insulator インシュレータ	1	Glass-filled PBT, UL94V-0 PBT ガラス繊維入り UL94V-0	SEE NOTE4
No.	Component 部品名	Quantity 数量	Material 材質	Finish 仕上

△ x									
△ x									
△ x									
JUL 26, 2021	N. Saito	T. Mogami	K. Shimada	Reviced for style change. / 様式変更の為、改版。					
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
THIRD ANGLE PROJECTION	DRAWN BY T. Sakai	DATE Nov. 30, 1983	CHECKED BY	DATE	APPROVED BY A. Oshitani	DATE Dec. 22, 1983	SCALE 10:1	UNIT mm	
MATERIAL	TITLE DSP01-002-430G-□				KEL CORPORATION				
FINISH					DRAWING No.		P33731		REVISION 2