
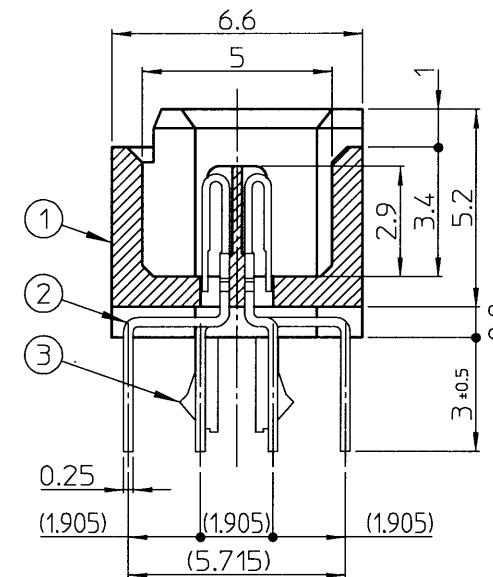


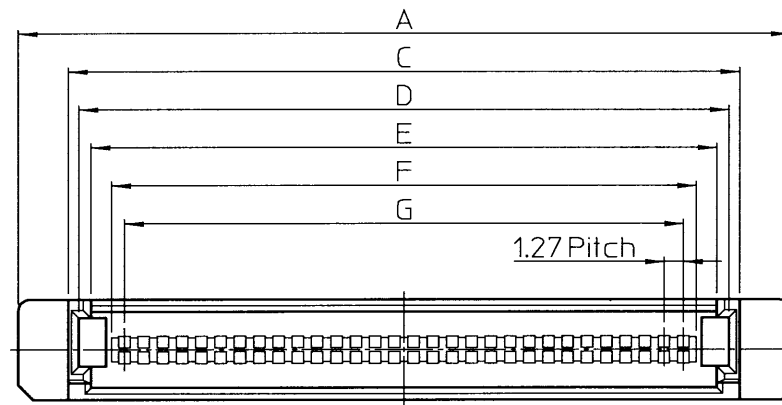

X-X' Cross-section (Scale 5 : 1)
X-X'断面(5:1)

Notes

1)Dimensions are in millimeter./ 單位:mm

2) Unless otherwise specified, tolerance shall be: / 指定なき寸法公差

Less than 10 / 0~10未満 ±0.2

10 ~ 50 / 10~50未満 ±0.25

50 or more / 50以上 ± 0.35

3) Contact finish./ コントクトの仕上げ

Under plating Nickel / ニッケルめっき下地

Contact area : Gold / 接触部:金めっき仕上げ

D : 0.25 μ m or more / D:0.25 μ m以上

Terminal area : Gold(0.03 μ m or more) / テール部:金めっき仕上げ(0.03 μ m以上)






4) F: RoHS compliant / RoHS対応

5) This drawing is based on 60 pin contacts. / 本図は60極で記載したものである。

6) A reference drawing of P.W.B. / 參考基板設計要領

Board thickness / 適合基板 : $1.6^{+0.2}_{-0.1}$

(Connector mounting side / コネクタ搭載面)

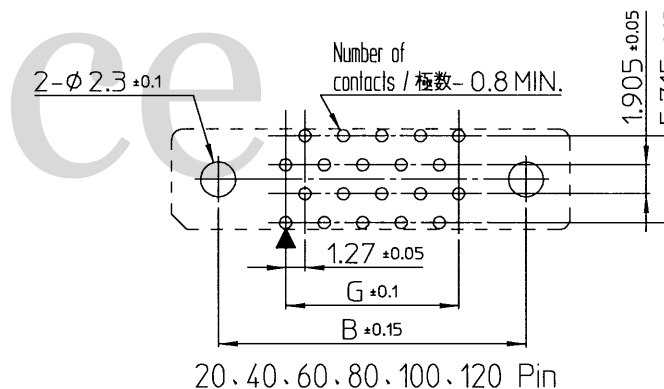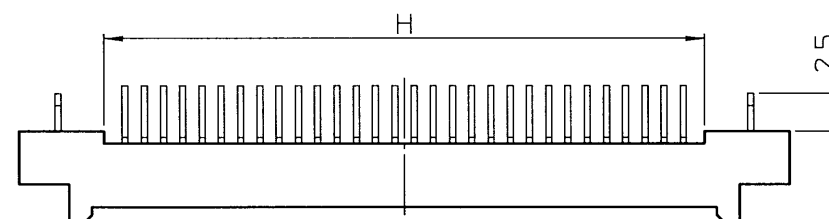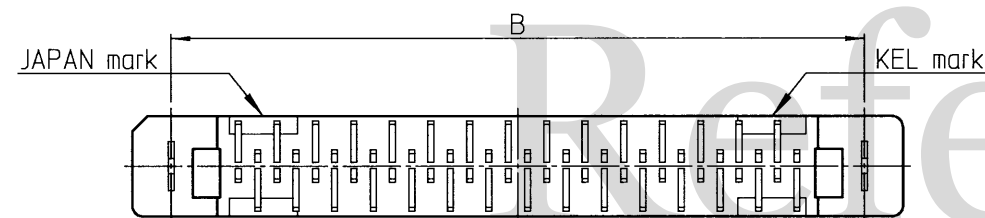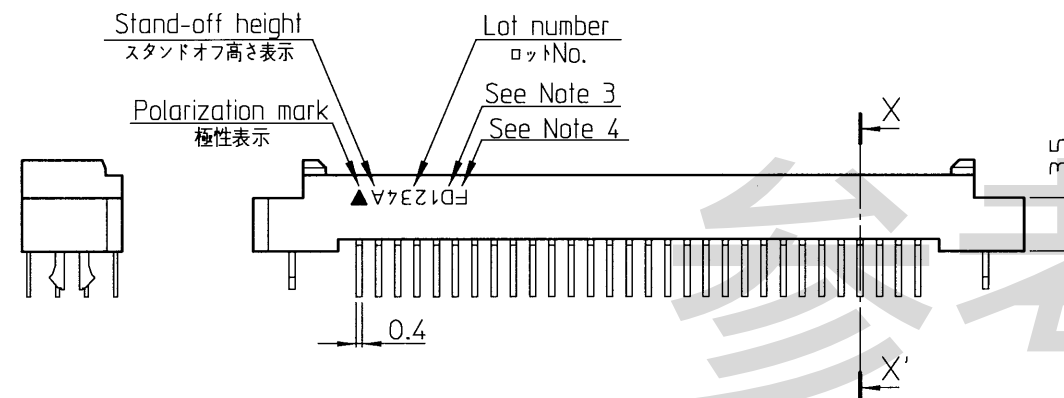

△ ×				
△ ×				
△ ×				
Apr.24, 2019	N. Saito	T. Meguro	S. Iijima	英文追加の為、改版。/Added English
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY A. Shimada	DATE Dec.13, 2004	CHECKED BY S. Kitamura	DATE Dec.10, 2004
			APPROVED BY Y. Azuma	DATE Dec.10, 2004
				SCALE 2:1
MATERIAL	TITLE			KEL CORPORATION
FINISH	8911-□□□-178SD-A-F			DRAWING No. P39654
				REVISION 2