
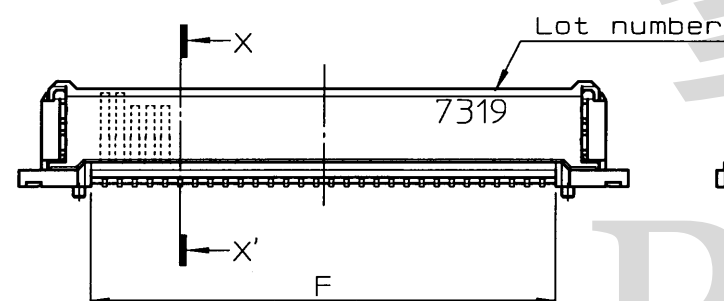
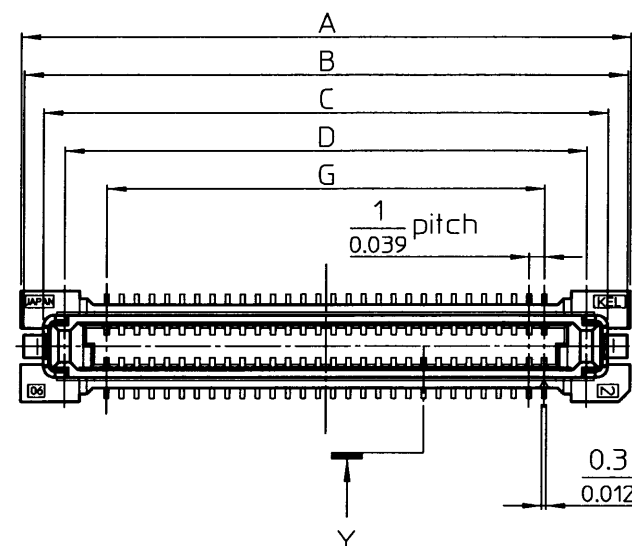
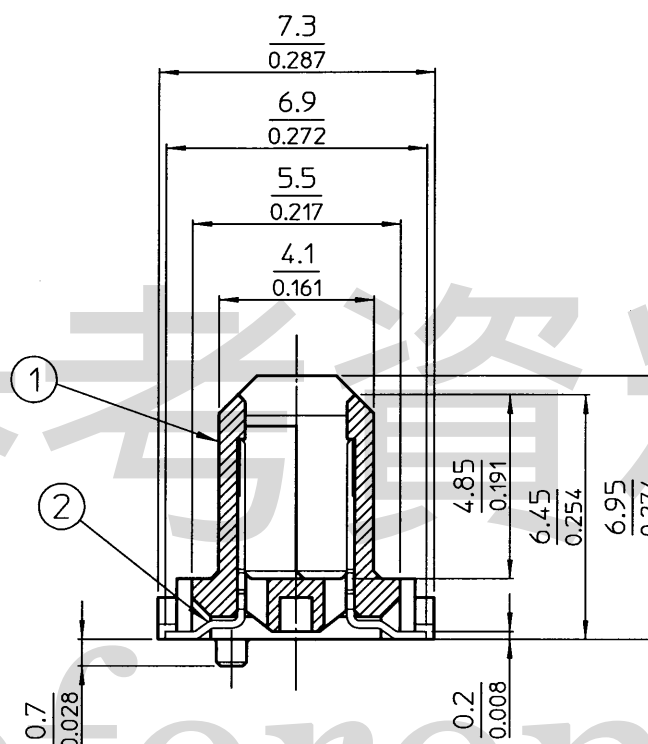


Y-Y' Cross-section

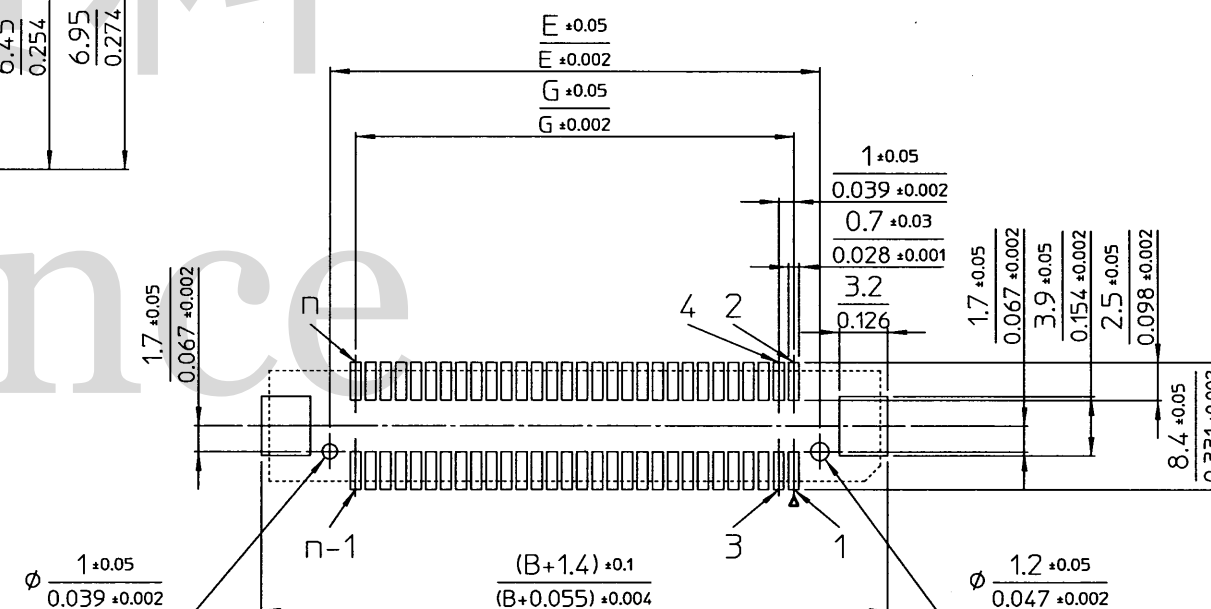

X-X' Cross-section (Scale 5:1)

A reference drawing of
P.W.B. (connector side)

G	F	E	D	C	B	A	No. of contact
19.0 (0.748)	20.8 (0.819)	22.4 (0.882)	24.6 (0.969)	27.4 (1.079)	30.0 (1.181)	30.4 (1.197)	40
24.0 (0.945)	25.8 (1.016)	27.4 (1.079)	29.6 (1.165)	32.4 (1.276)	35.0 (1.378)	35.4 (1.394)	50
29.0 (1.142)	30.8 (1.213)	32.4 (1.276)	34.6 (1.362)	37.4 (1.472)	40.0 (1.575)	40.4 (1.591)	60
39.0 (1.535)	40.8 (1.606)	42.4 (1.669)	44.6 (1.756)	47.4 (1.866)	50.0 (1.969)	50.4 (1.984)	80

Notes

- 1) Dimensions are in millimeters.
- 2) Inch equivalents are in parentheses or below the metric dimensions.
- 3) Unless otherwise specified, tolerance shall be:
 Less than 10 ± 0.20 (Less than 0.394 ± 0.008)
 10 ~ 50 ± 0.25 (0.394 ~ 1.969 ± 0.010)
 50 or more ± 0.30 (1.969 or more ± 0.012)
- 4) Finish
 Contact
 Under plating Nickel
 Contact area Gold Au 0.1 μm or more
 Terminal area Gold Au 0.03 μm or more
 Mounting hardware
 Under plating Nickel
 Terminal area Gold Au 0.03 μm or more
- 5) This drawing is based on 60 pin contacts.
- 6) A reference drawing of P.W.B.

3	Mounting hardware	2	Copper alloy	SEE NOTE 4
2	Contact	No. of Contact	Copper alloy	SEE NOTE 4
1	Insulator	1	Glass-filled L.C.P(UL94V-0) black	
No.	Component	Quantity	Material	Finish

△ ×			
△ ×			
△ ×			
△ ×			
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY S. Tanaka Jun. 19, 2007	DATE Jun. 19, 2007	CHECKED BY N. Saito Jun. 28, 2007
		DATE Jun. 28, 2007	APPROVED BY A. Shimada Jun. 28, 2007
		SCALE 2:1	
MATERIAL	TITLE		KEL CORPORATION
FINISH	DJ04-□□□S-F		DRAWING No. P3A424
			REVISION 1