
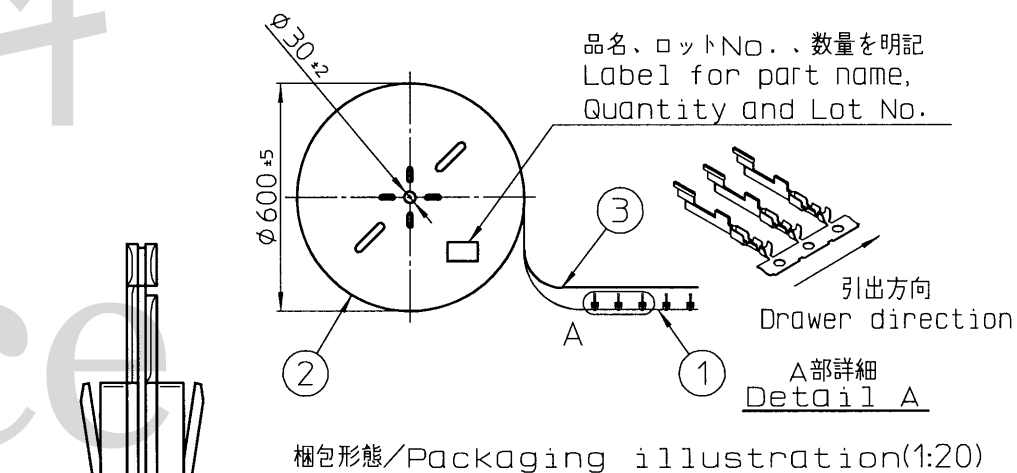
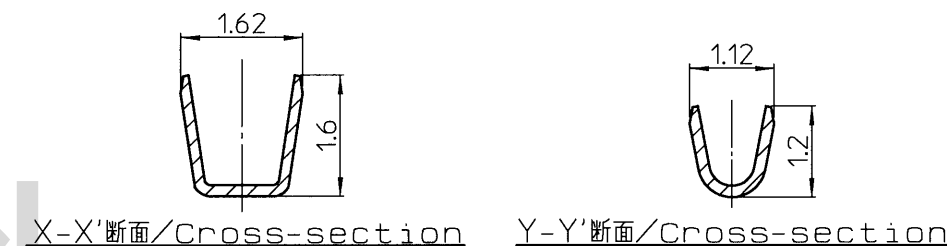



NOTES

- 指定なき寸法公差/Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上/10 or more ± 0.3
- #615-4仕上/Finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき仕上/Contact area/Gold plating(0.1 μ m以上/or more)
圧着部/銅めっき仕上/Crimp area/Tin plating(1.0 μ m以上/or more)
- 品名/Part name
#615-4
コンタクト長さ:標準より1mm短い/Contact length:1mm shorter than Standard
適合ケーブルサイズ/Applicable cable size
AWG26~28(ケーブル被覆外径 $\phi 0.88 \sim 1.00$)
AWG26~28(Insulation Dia. $\phi 0.88 \sim 1.00$)
FAS12用圧着コンタクト/Crimp contact for FAS12
- アセンブリツール/Assembly tools

圧着アプリータ/ Crimping applicator 日本オートマチックマシン(株)/Japan Automatic Machine Co., Ltd. EFS876700K	圧着ハンドツール Crimping hand tool CH-10
---	---

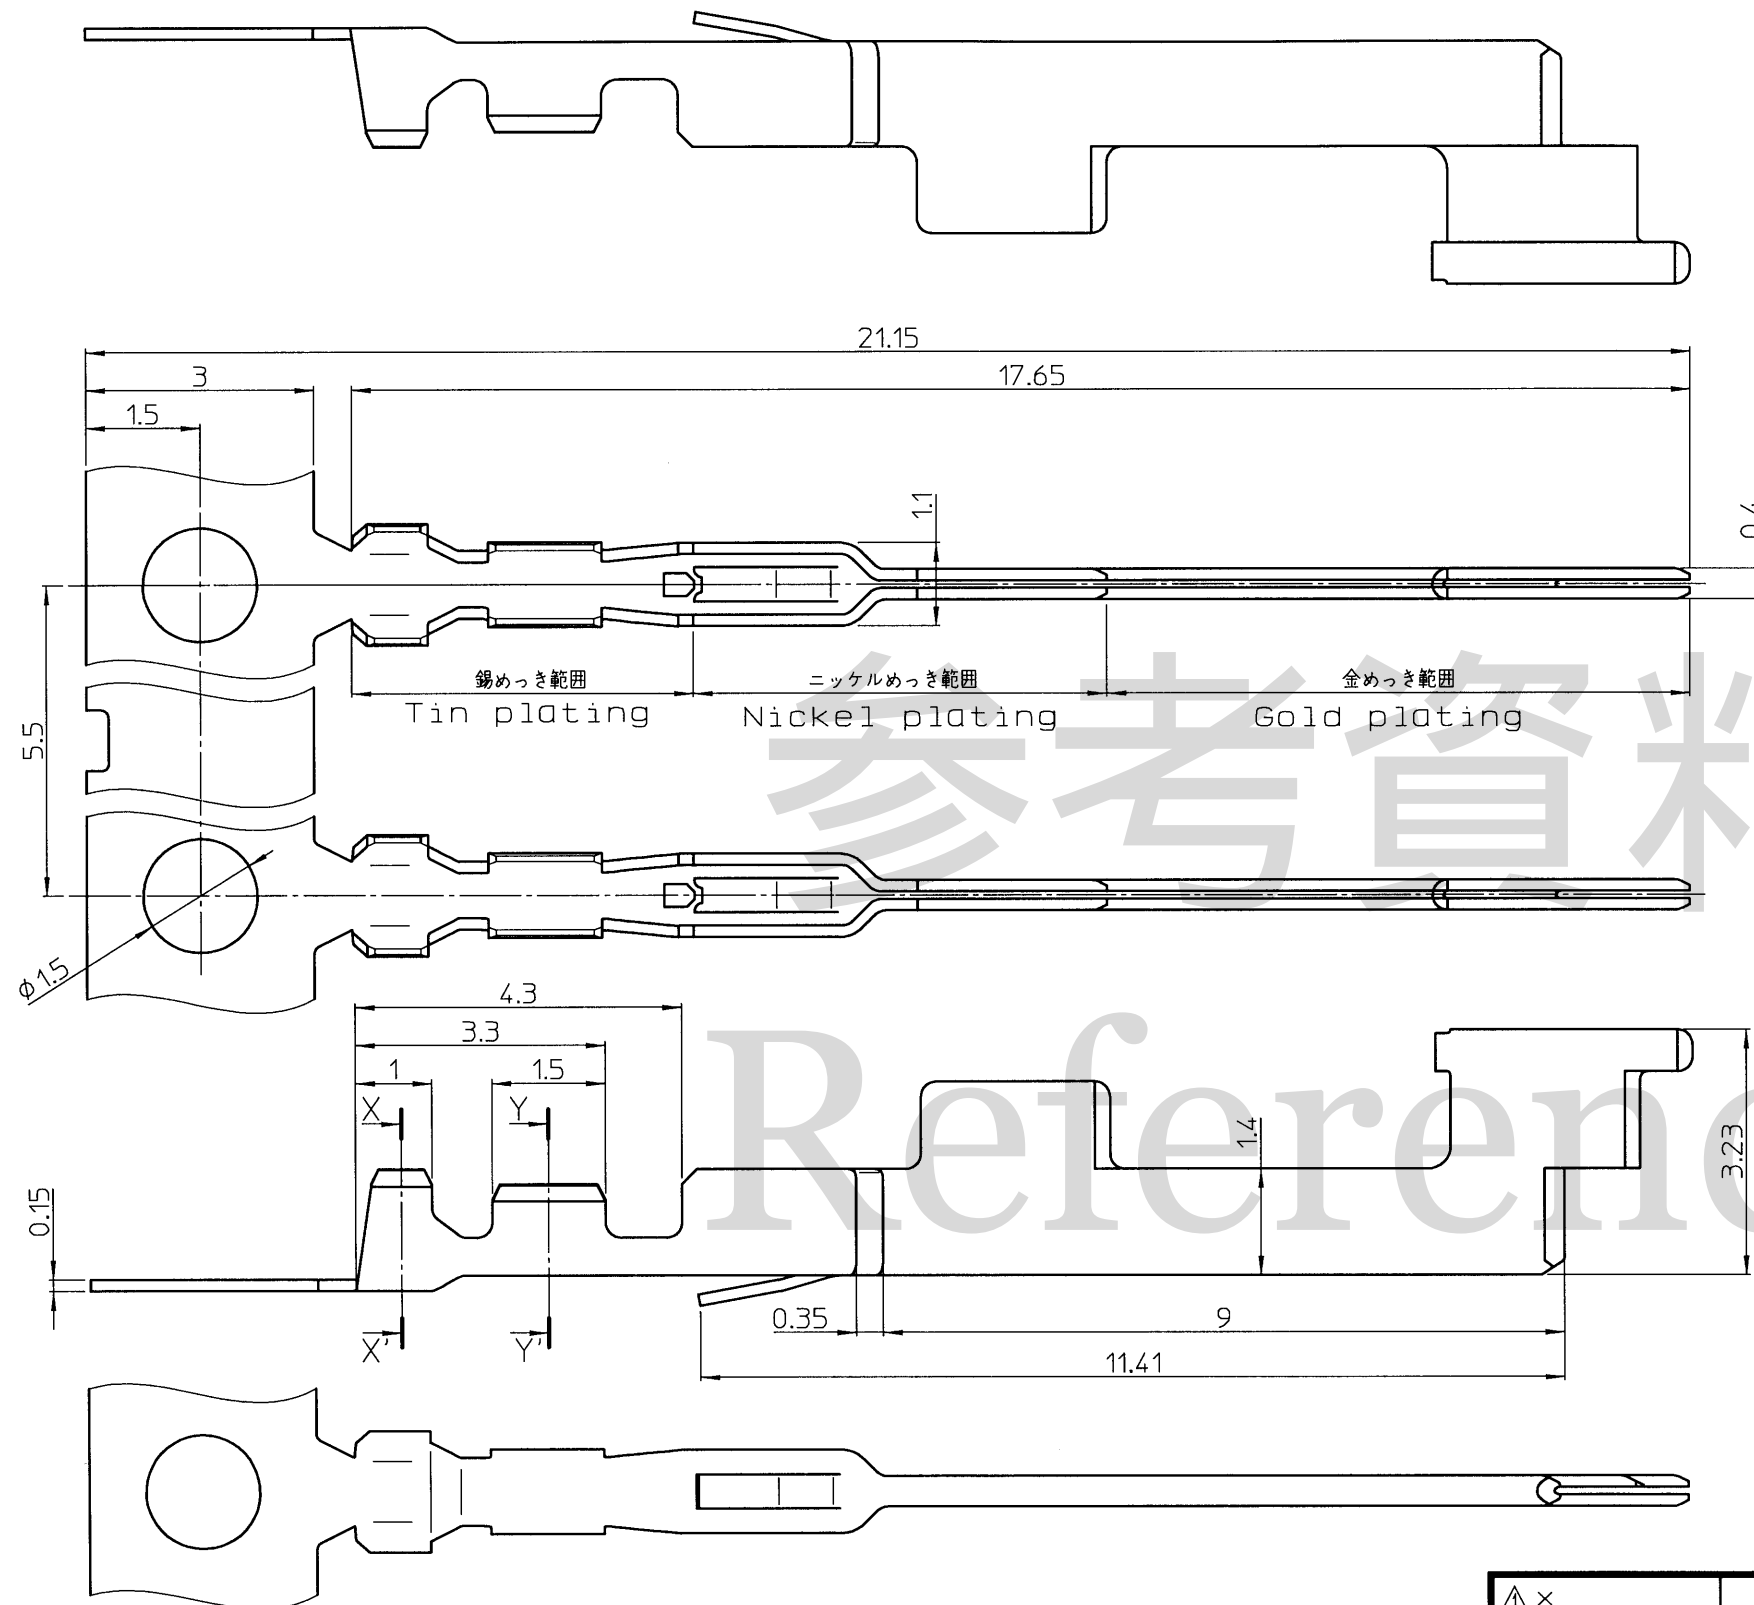

③	層間紙 Sandwich Paper between layers of contact	1	紙 Paper	
②	リール Reel	1	紙 Paper	
①	#615-4	5,000	銅合金 Copper alloy	SEE NOTE2
No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish

△ ×													
Jan.29,2021		n. Sugita		S.Takao		Y.Aoki		ニッケルめっき範囲、背面図、断面追加の為、改版。 Add Nickel plating and Rear view, Cross-section.					
REV. DATE		APPROVED BY		CHECKED BY		DRAWN BY		DESCRIPTION					
THIRD ANGLE PROJECTION 		DRAWN BY A.Yajima		DATE Oct.04,2016		CHECKED BY S.Takao		DATE Oct.04,2016		APPROVED BY N.Sugita	DATE Oct.04,2016	SCALE 10:1	UNIT mm
MATERIAL		TITLE #615-4						KEL CORPORATION					
FINISH								DRAWING No. P3D433					REVISION 3