







REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	04JUL2024	LP	MY



ø22.5

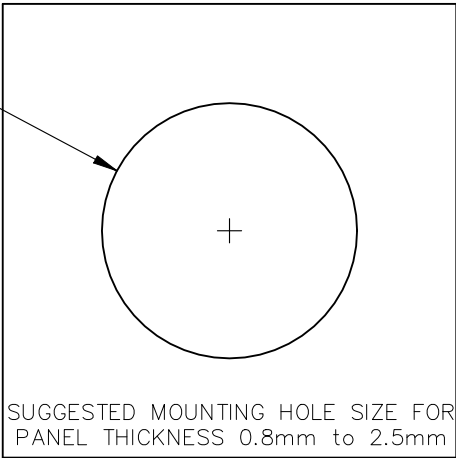


SUGGESTED MOUNTING HOLE SIZE FOR
PANEL THICKNESS 0.8mm to 2.5mm

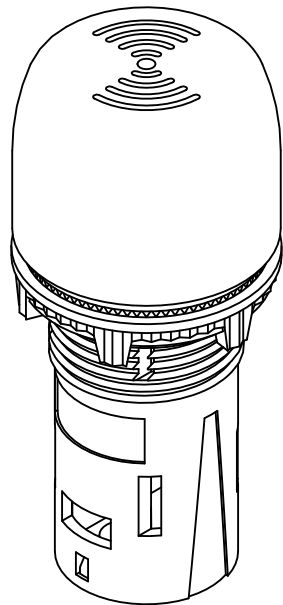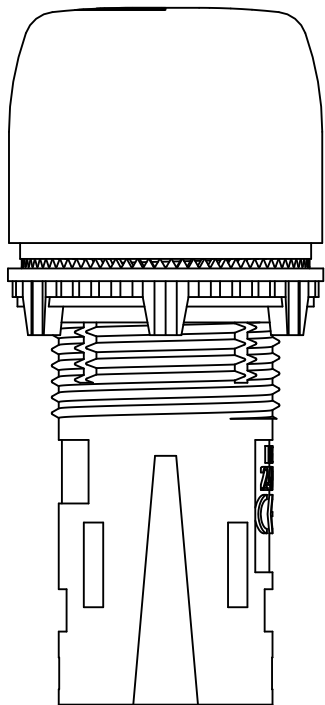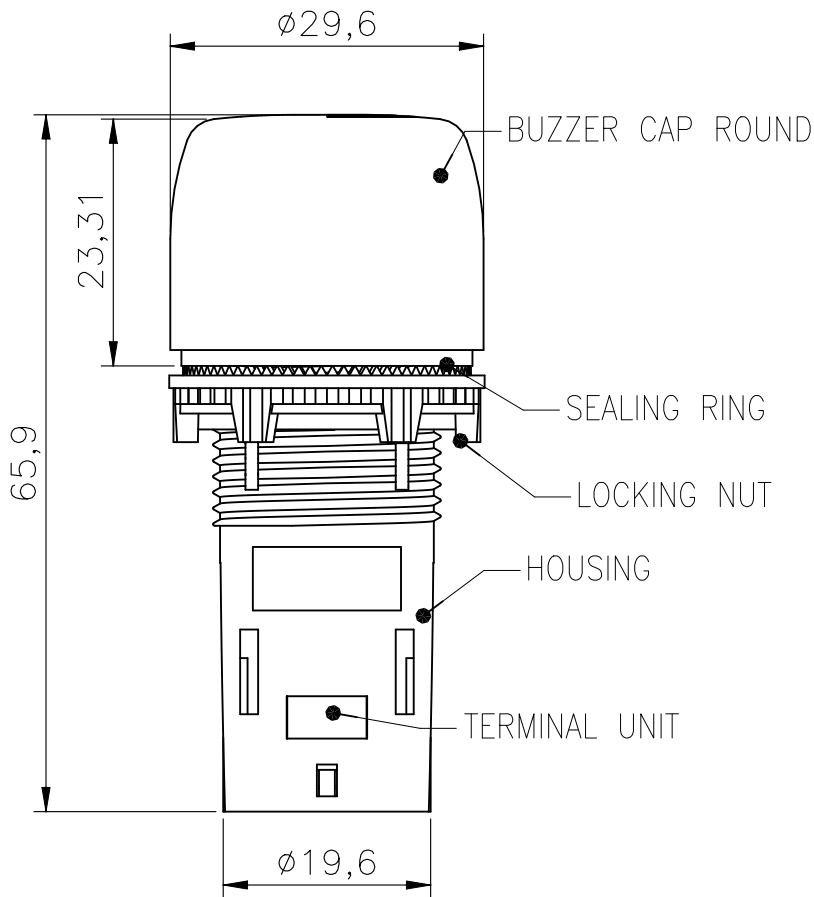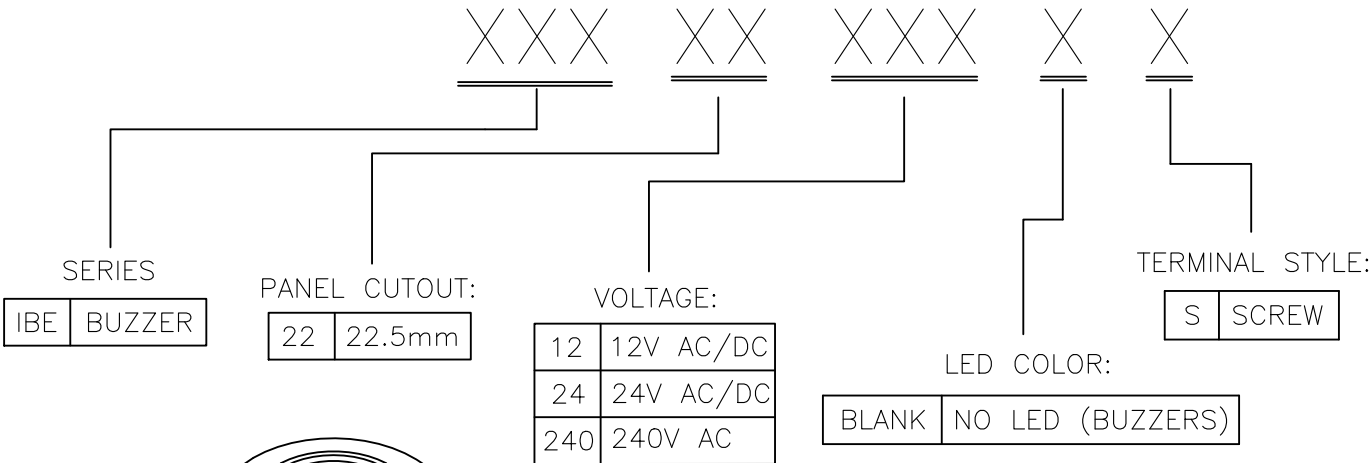


MATERIAL SPECIFICATIONS:	
CAP	POLYCARBONATE
LOCKING NUT BLACK	NYLON 6 30% GF
TERMINAL HOLDER	NYLON 66 FR,GF 25%
HOUSING	NYLON 6 30% GF FR BLACK KGS B Yes 0.0084
TERMINAL & S/W ASSY	MS WITH ZIC PLATING
SEALING RING BLACK NEONBR/SILICON RUBBER	
COTACT BASE MATERIAL	BRASS
CONTACT PLATING	TIN

SPECIFICATIONS:

1. OPERATING VOLTAGE:240V AC // 24V AC/DC // 12V AC/DC
2. DEGREE OF PROTECTION:FOR TERMINALS : IP20 –IEC60529 : 2013
3. COLORS AVAILABLE: BLACK
4. PRODUCT LIFE: >10K Hrs OF CONTINUOUS OPERATION
5. OPERATING TEMPERATURE: –10°C TO 65°C
6. STORAGE TEMPERATURE: –10°C TO 65°C
7. SURGE PROTECTION 1KV (L–L).
8. SOUND PRESSURE LEVEL: 80db@ 1mtr
9. SOUND MODE: CONTINUOUS.

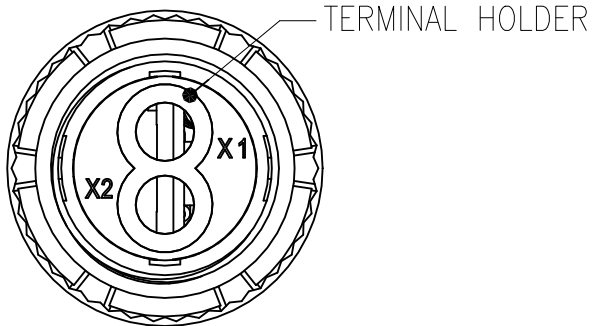

BUZZER 240VAC	IBE22240S	2489542–3
BUZZER 24VAC/DC	IBE2224S	2489542–2
BUZZER 12VAC/DC	IBE2212S	2489542–1
DESCRIPTION	TE SMART PN	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LINGANATHAN P CHK MANOJ YADAV APVD MANOJ YADAV		03JUL2024 03JUL2024 03JUL2024		TE Connectivity							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME BUZZER									
		0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± – 4 PLC ± – ANGLES ± –		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —									
MATERIAL —		FINISH —		SIZE A3		CAGE CODE 00779		DRAWING NO C-2489542		RESTRICTED TO —			
CUSTOMER DRAWING								SCALE 1:1		SHEET 1 OF 1		REV 1	