



3. 品名/Part name

#615-1

 コンタクト長さ：標準 / Contact length : Standard

適合ケーブルサイズ/Applicable cable size

AWG24(ケーブル被覆外径 ϕ 1.08~1.14)

AWG24(Insulation Dia. $\phi 1.08 \sim 1.14$)


—FAS12用圧着コンタクト/Crimp contact for FAS12

- #### 4. アセンブリツール/Assembly tools


A diagram of a U-shaped cross-section. The top width is labeled 1.23. The height from the bottom center to the top edge is labeled 1.5. The U-shape is symmetrical about a vertical centerline.

X-X'断面/Cross-section

Y-Y' 断面 / Cross-section

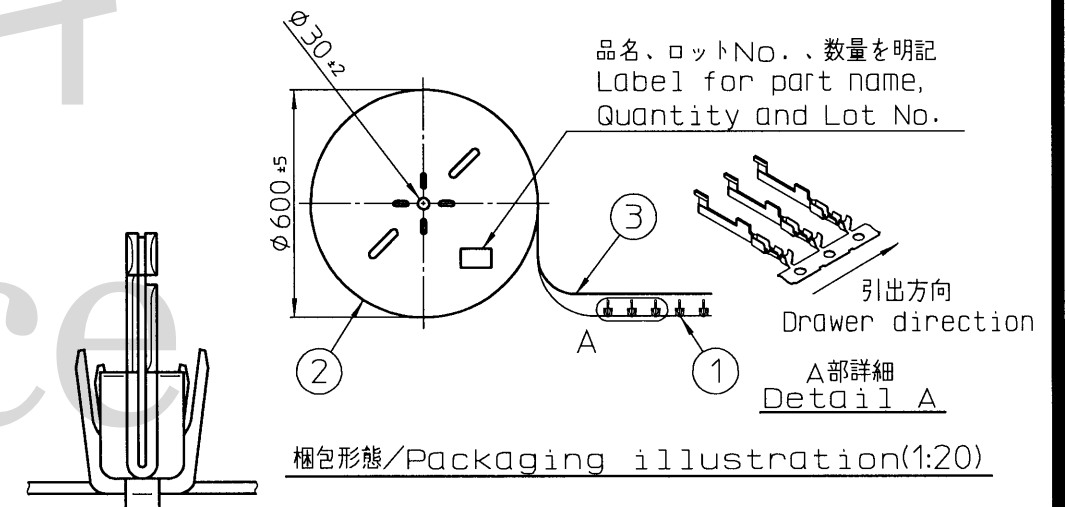

③	層間紙 Sandwich Paper between layers of contact	1	紙 Paper	_____
②	リール Reel	1	紙 Paper	_____
①	#615-1	5,000	銅合金 copper alloy	SEE NOTE2
No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish

△ ×					ニッケルめっき範囲、背面図、断面追加、AWG24ケーブル被覆外径範囲拡大の為、改版。 Add Nickel plating and Rear view, Cross-section, expanded range of Insulation Dia.(AWG24)				
Jan.29,2021		<i>n. Sugita</i>	<i>S. Takao</i>	<i>Y. Aoki</i>					
REV. DATE		APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION				
THIRD ANGLE PROJECTION		DRAWN BY A.Yajima	DATE Aug.01,2014	CHECKED BY K.Tagai	DATE Aug.04,2014	APPROVED BY N.Sugita	DATE Aug.04,2014	SCALE 10:1	UNIT mm
MATERIAL		TITLE				KEL CORPORATION			
FINISH		#615-1				DRAWING No.		P3C987	REVISION 3