


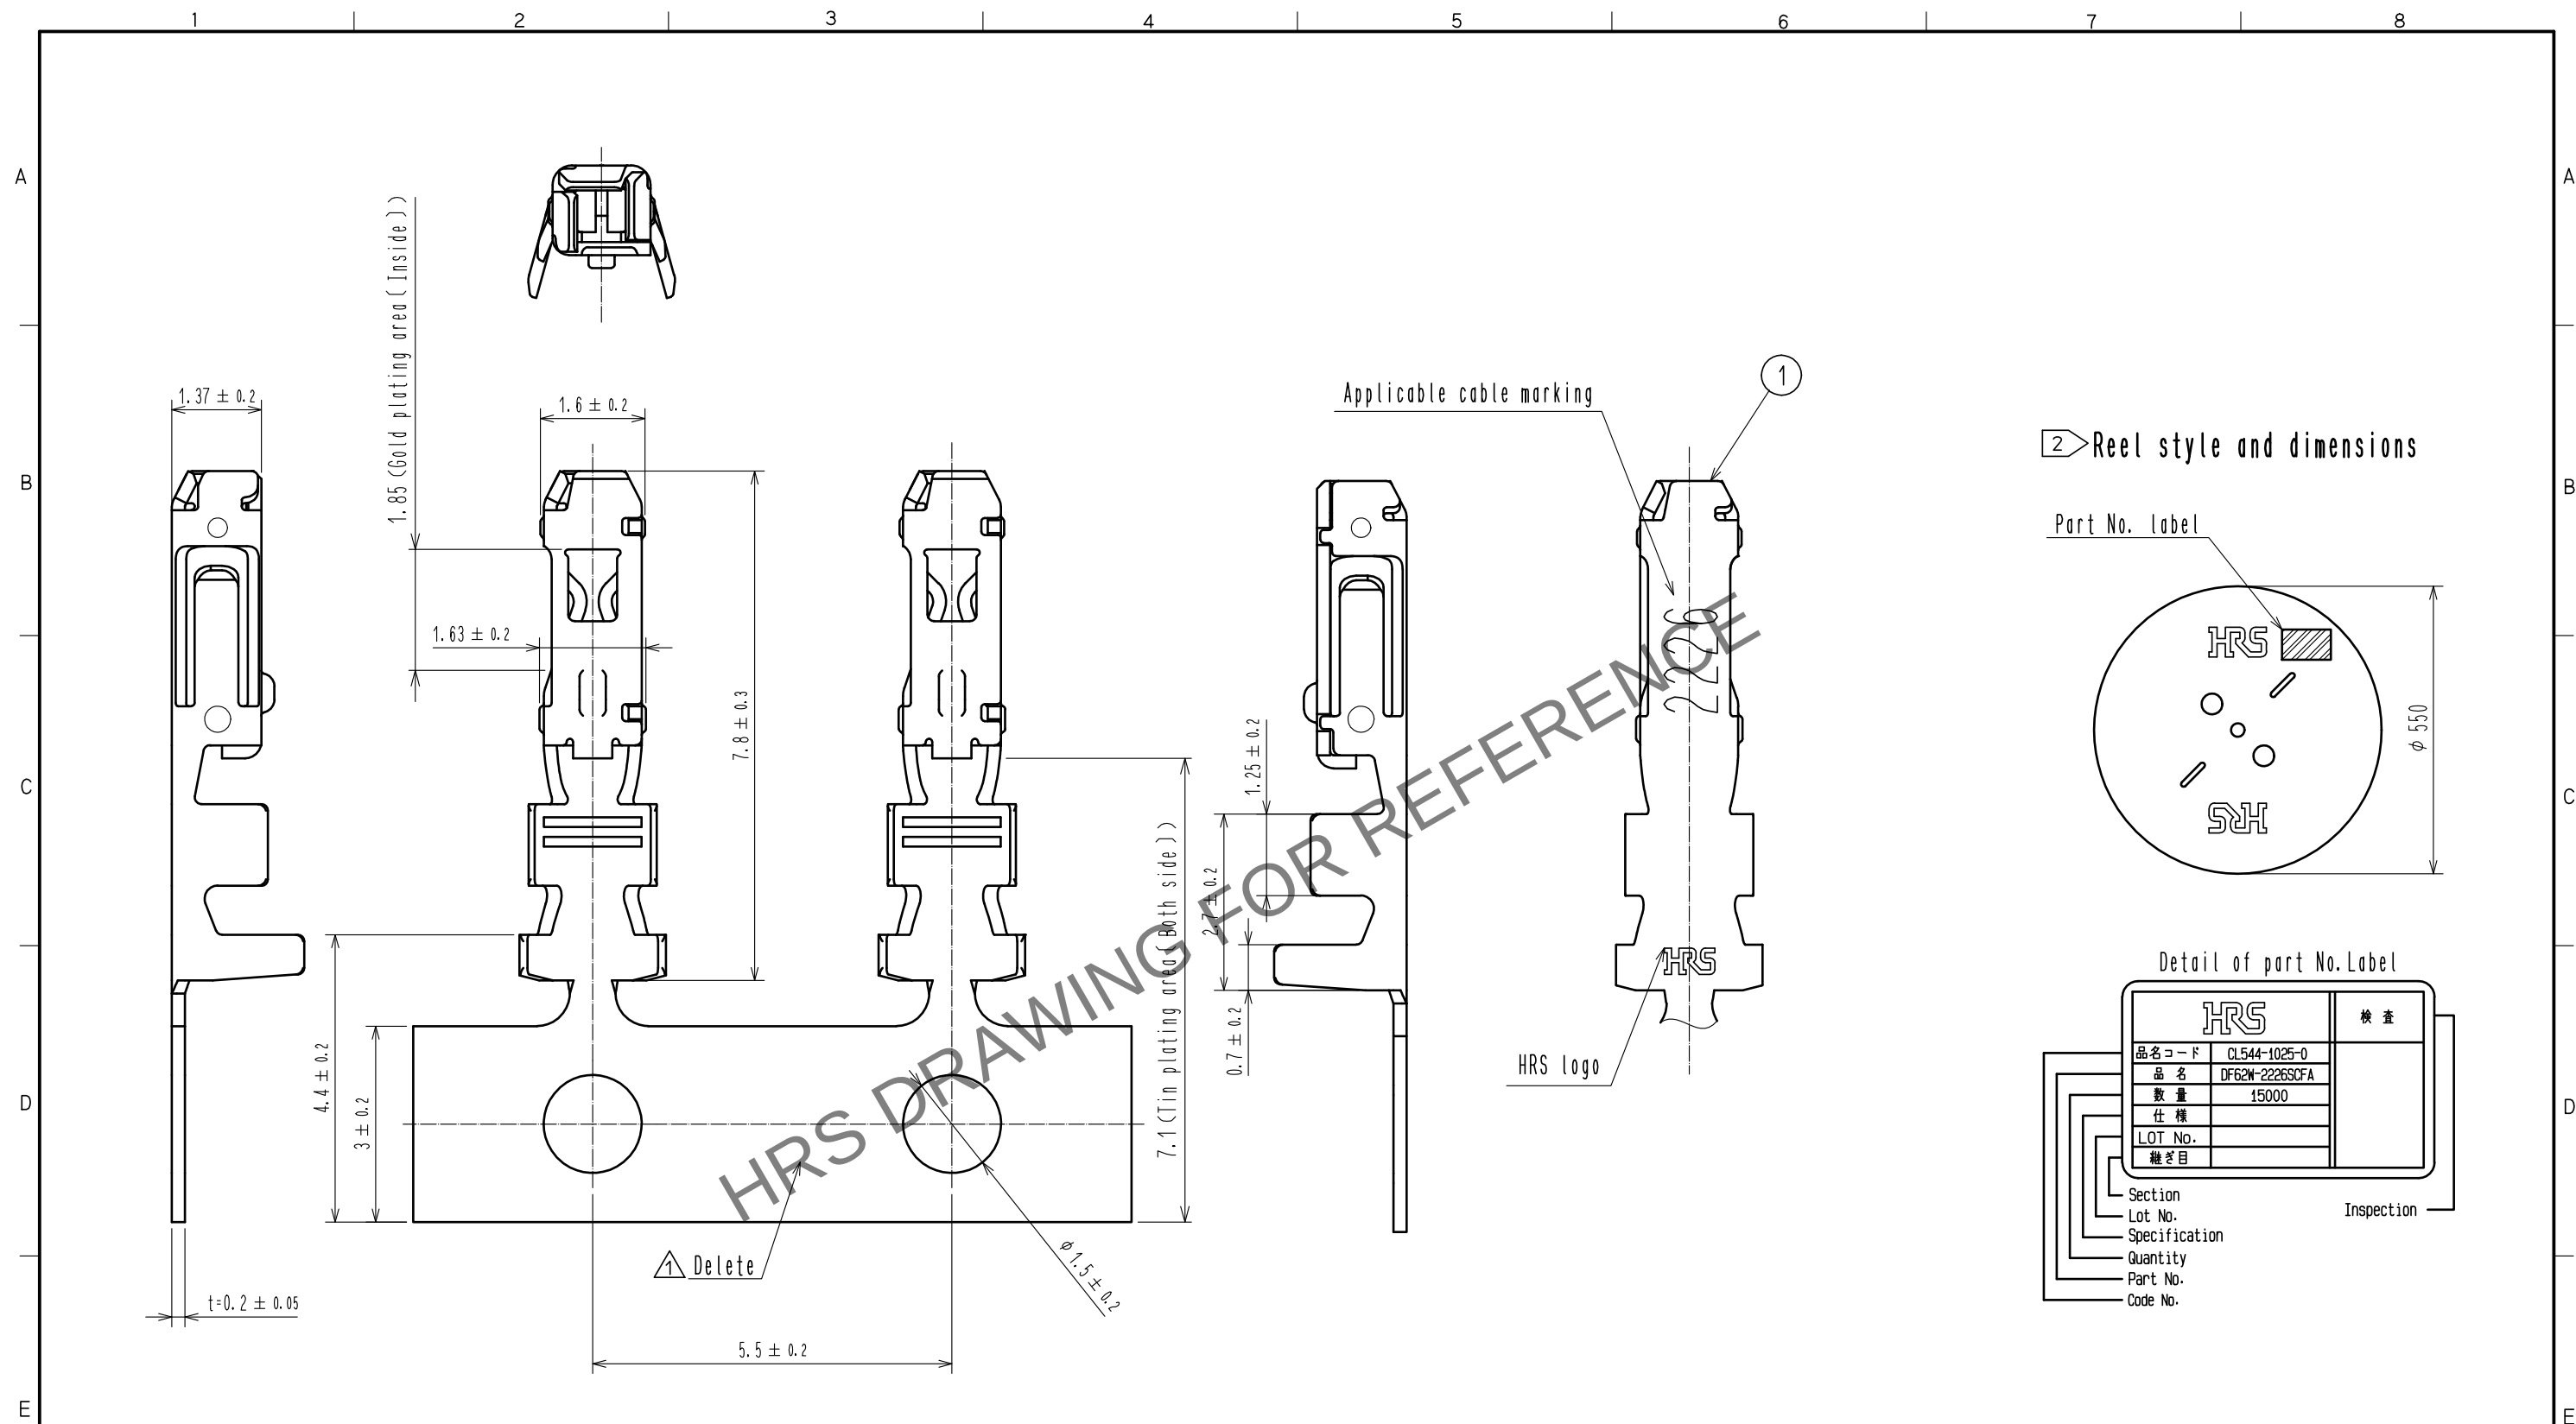

- Notes
1. 1RL : 15000 contacts.
 2. Style of reel and box are shown in figure.
 3. Up to 5 reels are packed up in one box.
 4. Please be sure to check the form of crimping using a cable when you adjust applicator.
 5. Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

					1	Phosphor bronze	Contact area:Gold plating 0.2μm min Carrier/Barrel area:Tin plating 1μm min Others : Nickel plating 0.5 μm min			
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS	
UNITS mm			SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00001435		DESIGNED YK. YAMAGUCHI	CHECKED TS. FUKUSHIMA	DATE 16. 03. 04
 HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA		15. 12. 14	DRAWING NO. EDC-364715-00-00				
			CHECKED : TS. FUKUSHIMA		15. 12. 14	PART NO. DF62W-2226SCFA				
			DESIGNED : YK. YAMAGUCHI		15. 12. 11	CODE NO. CL544-1025-0-00				
			DRAWN : MI. SAKIMURA		15. 12. 11	 				