




Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

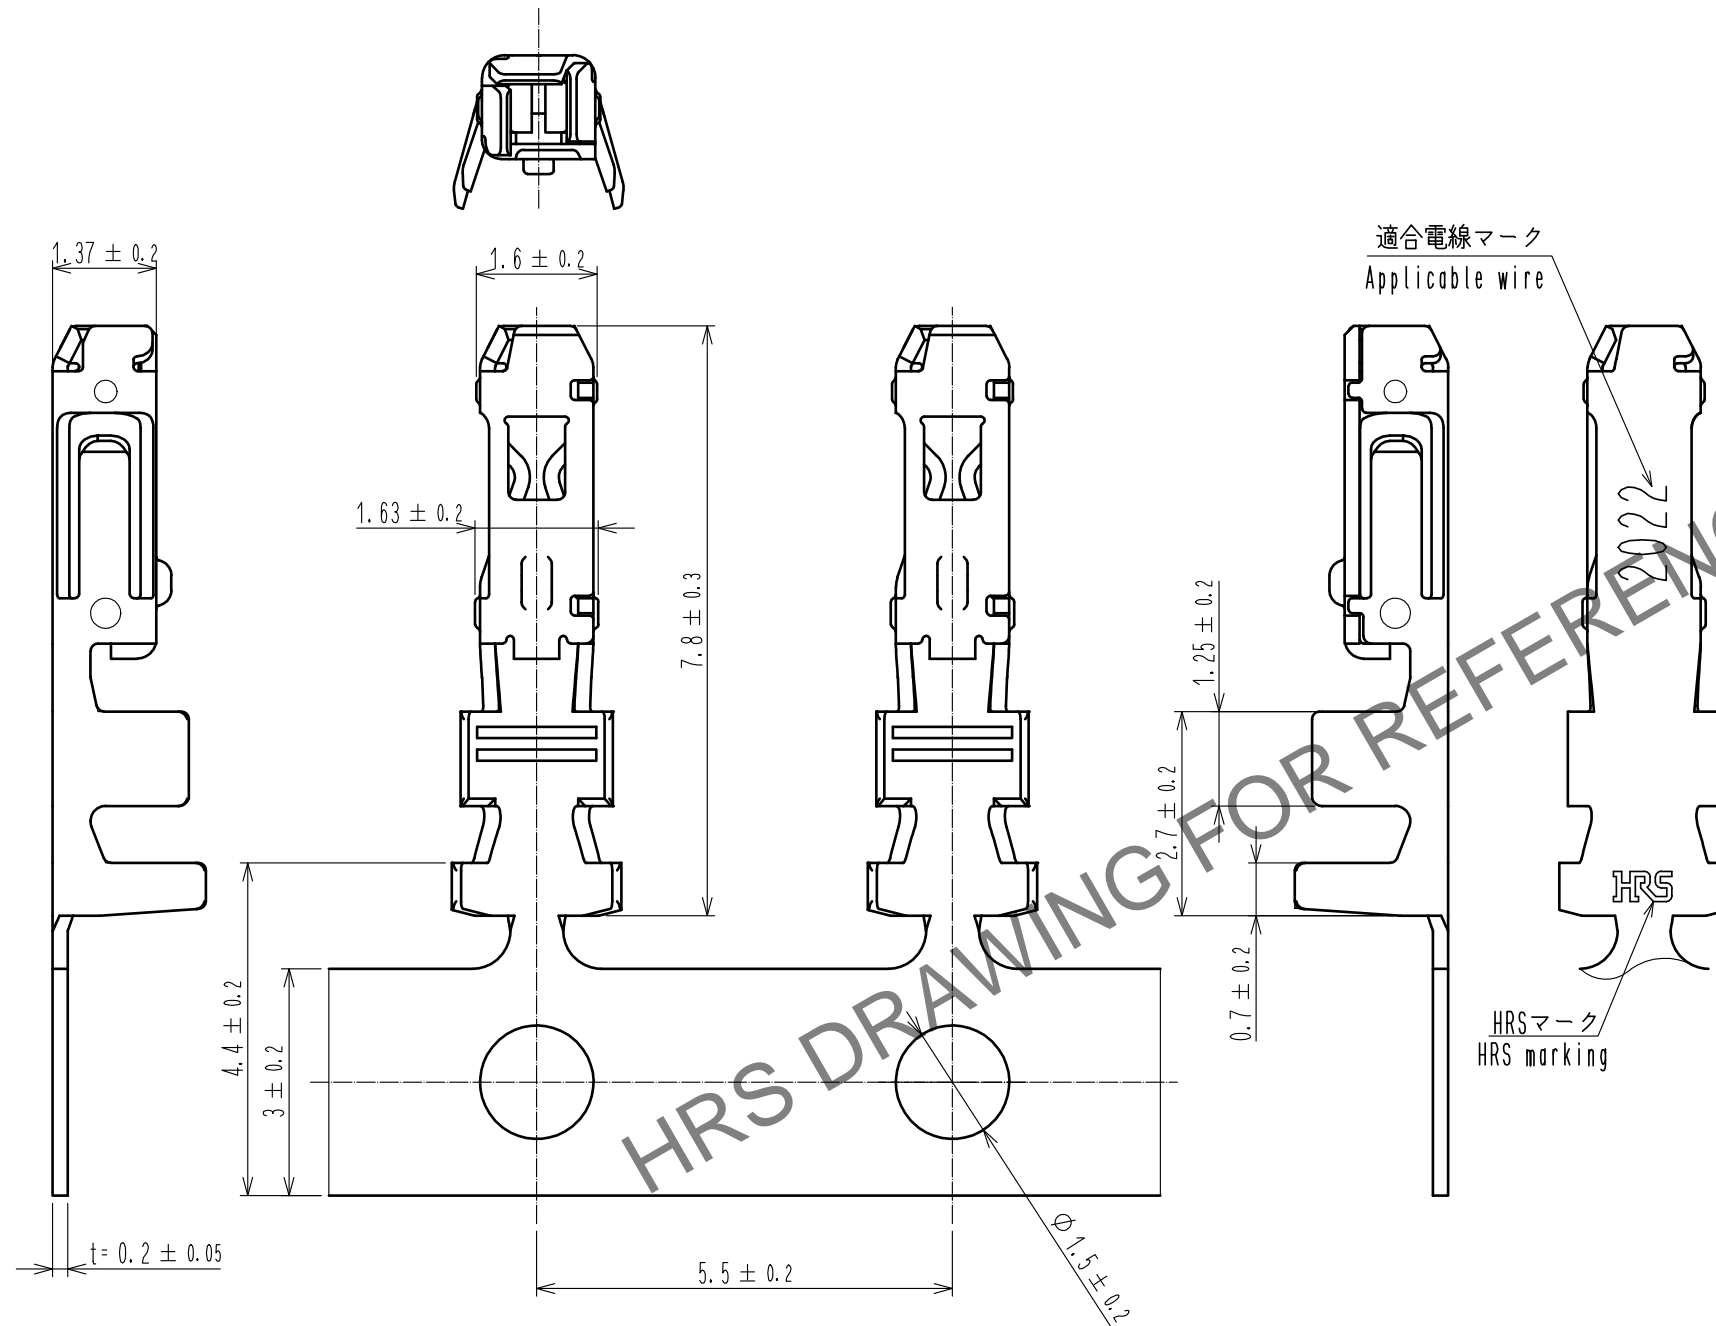

2 Reel style and dimensions

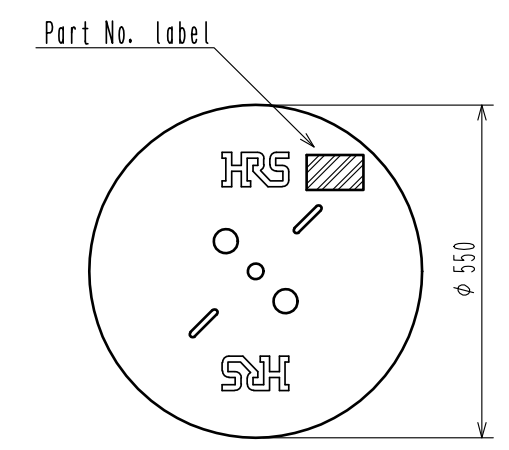

Detail of part No. Label

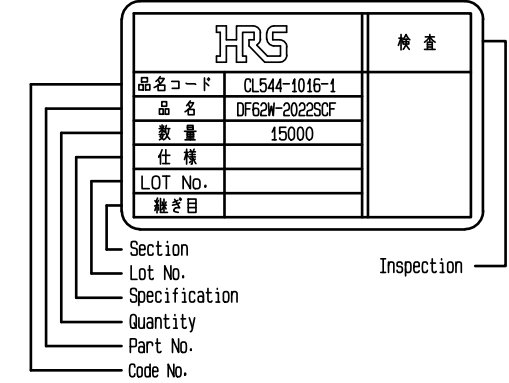

Notes

- 1RL : 15000 contacts.
- 2 Style of reel and box are shown in figure.
- Up to 5 reels are packed up in one box.
- Please be sure to check the form of crimping using a cable when you adjust applicator.
- Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

NO.				1				Phosphor bronze				Tin plating : 1μm MIN			
MATERIAL				FINISH . REMARKS				MATERIAL				FINISH . REMARKS			
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE			
mm		10 : 1													
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		15. 09. 26		DRAWING NO.		EDC-358671-00-00					
				CHECKED : TS. FUKUSHIMA		15. 09. 26		PART NO.		DF62W-2022SCF					
				DESIGNED : YK. YAMAGUCHI		15. 09. 26		CODE NO.		CL544-1015-9-00					
				DRAWN : YK. YAMAGUCHI		15. 09. 26									