


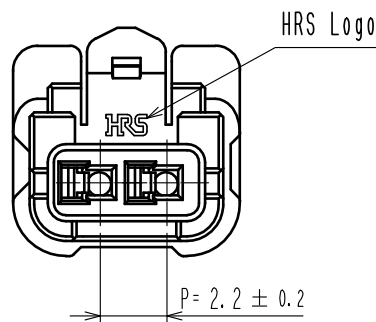
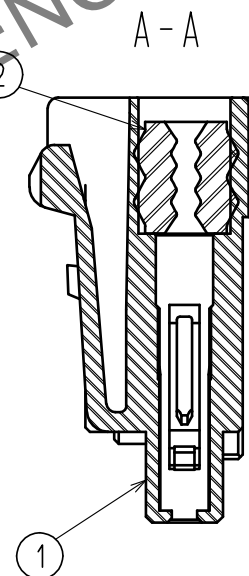
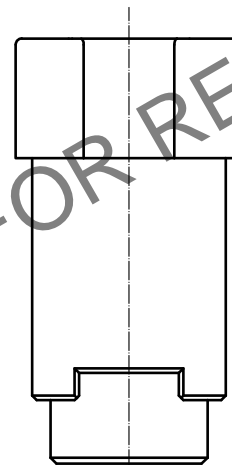
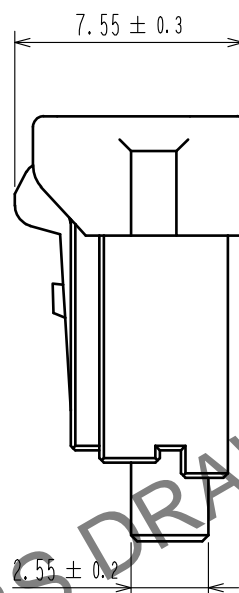


Oct.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

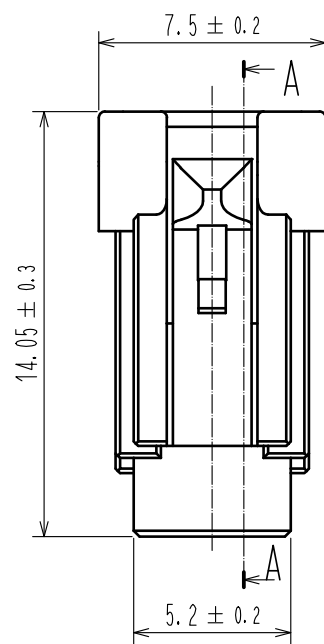


- Notes.
1. 100 pcs. / bag
 2. The dimensions in parenthesis are reference dimensions.
 3. Always refer to the manuals below for operation of this product.
For cable assembly / Cable assembly procedure ETAD-H0760
For mating/unmating / Operation manual ETAD-H0761
 4. Applicable insulation diameter : $\phi 0.98$ to $\phi 1.2$ mm.

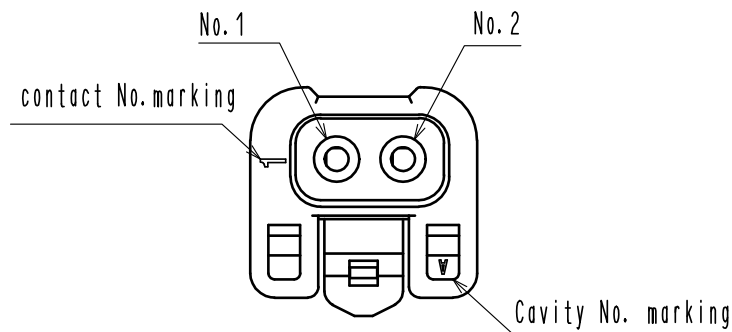



Mated figure

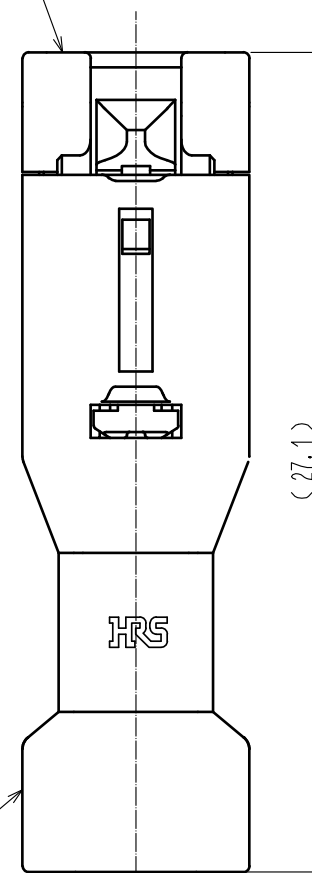

DF62WC-2S-2.2C



DF62W#-2EP-2.2C

1	PBT	UL94V-0(White)		2	Silicone rubber	Gray		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
		4 : 1						
		APPROVED : HS. OKAWA		20190405	DRAWING NO.		EDC-374692-00-00	
		CHECKED : SZ. ONO		20190404	PART NO.		DF62WC-2S-2.2C	
		DESIGNED : TO. KUROMATSU		20190404	CODE NO.		CL544-1046-0-00	
 HIROSE ELECTRIC CO., LTD.		DRAWN : TO. KUROMATSU		20190404				1