

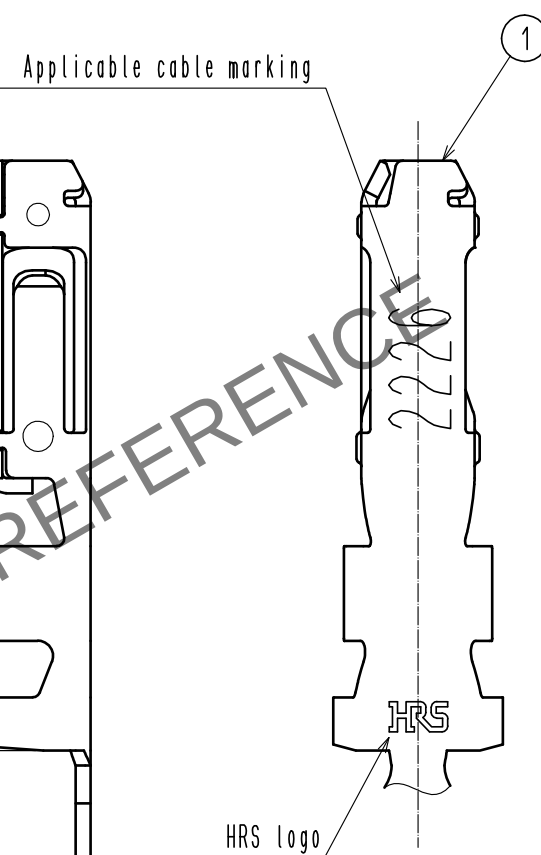


Oct.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

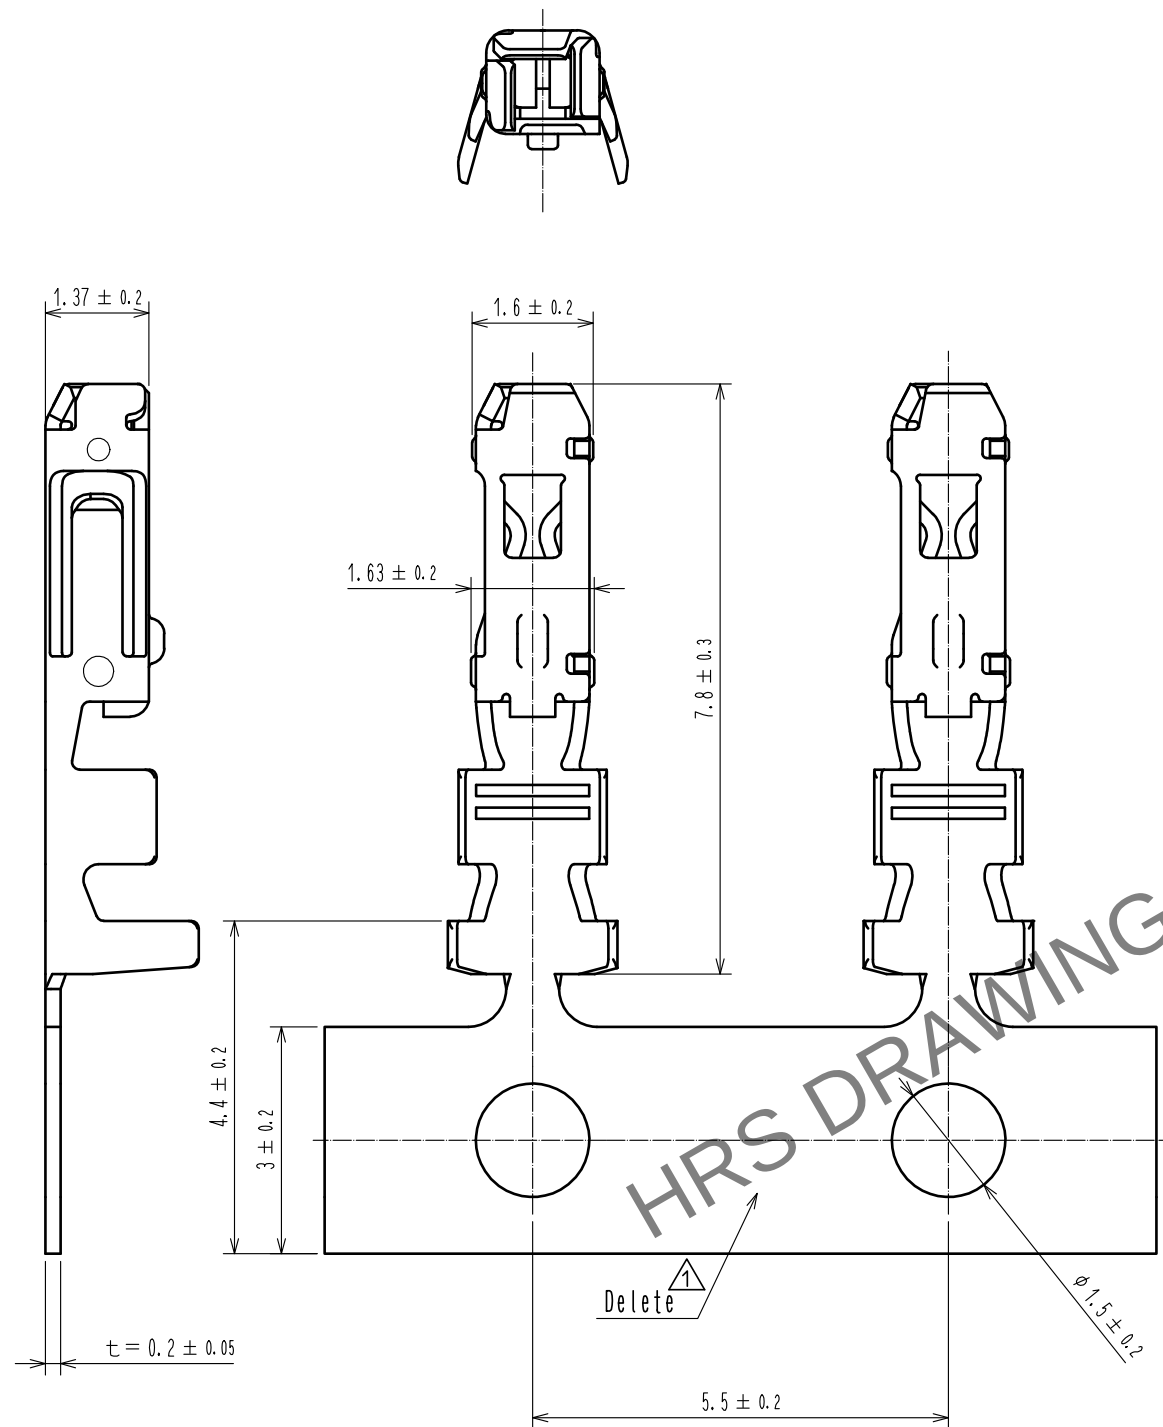


2 Reel style and dimensions

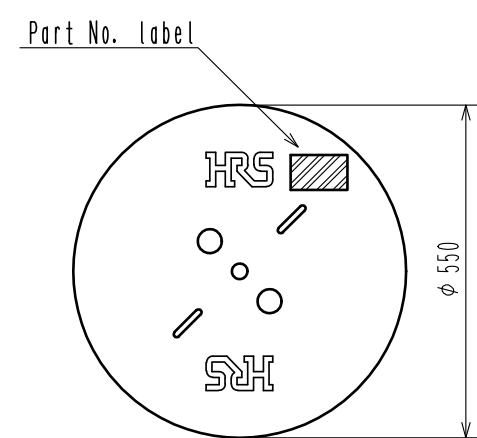

Detail of part No. Label

HRS		検査
品名コード	CL544-1000-1	
品名	DF62W-2226SCF	
数量	15000	
仕様		
LOT No.		
継ぎ目		
Section		Inspection
Lot No.		
Specification		
Quantity		
Part No.		
Code No.		

- Notes
- 1RL : 15000 contacts.
 - 2 Style of reel and box are shown in figure.
 - Up to 5 reels are packed up in one box.
 - Please be sure to check the form of crimping using a cable when you adjust applicator.
 - Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

NO.		MATERIAL		FINISH . REMARKS			1	Phosphor bronze		Tin plating : 1μm MIN						
NO.		MATERIAL		FINISH . REMARKS												
UNITS mm				SCALE 10 : 1		 COUNT 1		DESCRIPTION OF REVISIONS DIS-H-00001433			DESIGNED YK. YAMAGUCHI		CHECKED TS. FUKUSHIMA		DATE 16.03.03	
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA				14. 01. 15		DRAWING NO.		EDC-353515-00-00				
				CHECKED : MN. KENJO				14. 01. 15		PART NO.		DF62W-2226SCF				
				DESIGNED : KT. ISHII				14. 01. 14		CODE NO.		CL544-1000-1-00				
				DRAWN : KT. ISHII				14. 01. 14								