

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black	
Model No. Power Cord		
	Part No./Ordering No. 302J115J6F0701J(R)	Rev C

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black		
	Model No. Power Cord		
	Part No./Ordering No. 302J115J6F0701J(R)		Rev C

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
C	UPDATE HANKING FROM 200MM->160MM. UPDATE THE OVERALL RATING. EFFECTIVE FOR ALL PRODUCTION DATECODE APRIL 2020 AND LATER; ADDED CORDSET OVERALL RATING 12V/125VAC	DR	03/30/2020	QA
B	Remove CSA approval	bsiep	06/19/2019	QA
A	Initial Release	bsiep	04/01/2019	QA


Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):1830 +/- 50

NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s). flammability rating of VW-1

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302J115J6F0701J(R)	Rev C


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

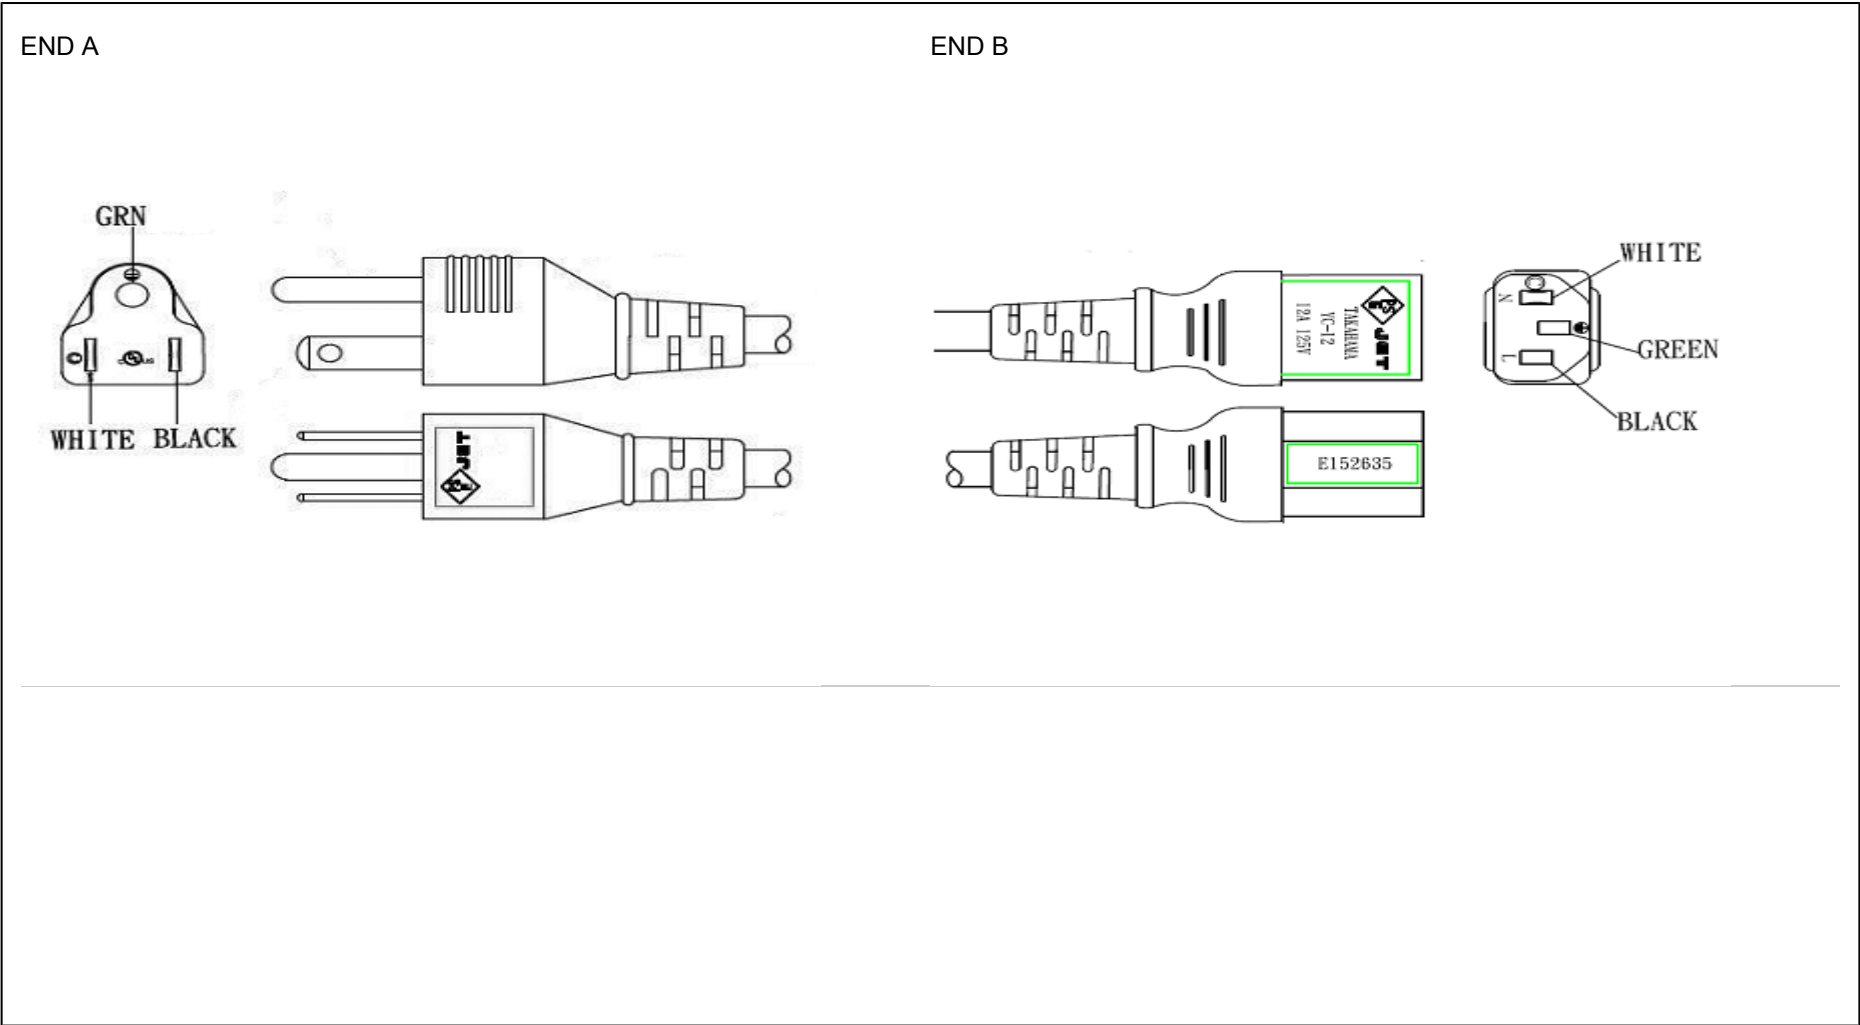

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302J115J6F0701J(R)	Rev C





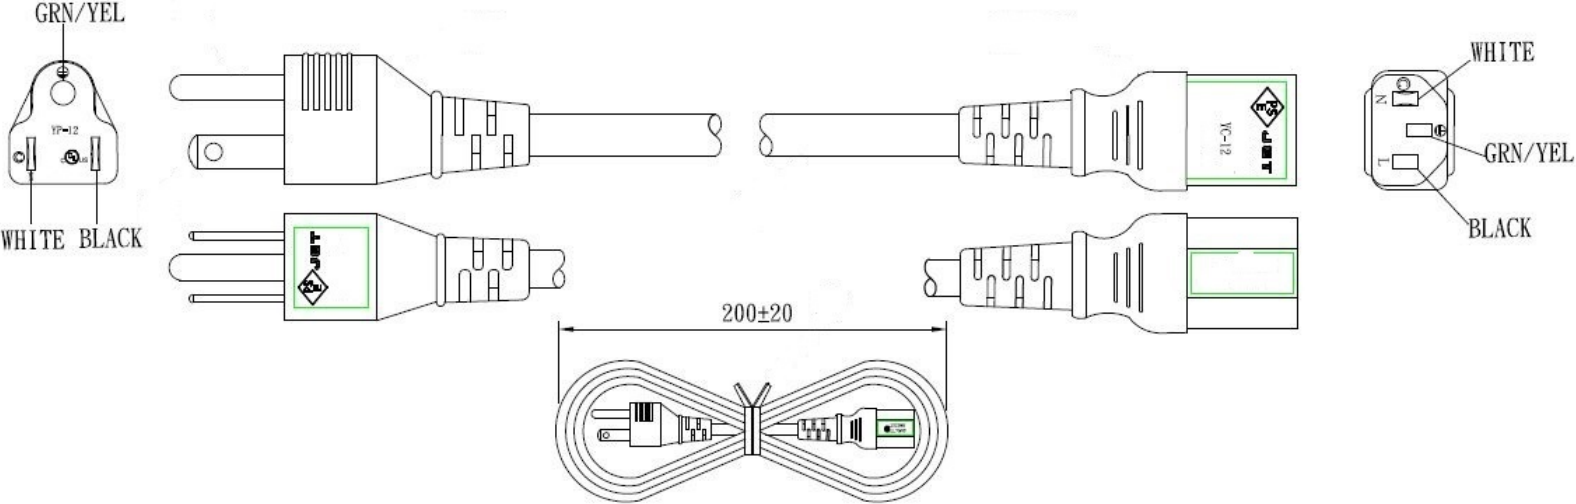

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE



GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302J115J6F0701J(R)	Rev C


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A Code:302J-12A Description:Nema 5-15P (Type B) (appr for No Amer and Japan) Rating (V):125 Rating (A):12.0 Gender:Male Overmolded:Yes	Cable Code:115J Description:GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE Color:GlobTek Black Wire Gauge(AWG):16 / 1.25mmsq Cond:3 Type:SJT / VCTF Temperature:60° C Amps:12 Volts:300 OD:8.5 ConductorsColors:BLK/WHT/GRN-YEL	End B Code:701J-12A Description:IEC320-C13 (appr for No. Amer and Japan) Rating (V):125 Rating (A):12.0 Gender:Female Overmolded:Yes
Overall cable rating:125VAC/12A		
<div> <div> <div>Plug Approvals</div> <div>   </div> <div> <p>Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, anddf cables total up to a UL approved cordset or cable assembly</p> <p>LINK TO CERTs</p> <p>Link to live Power Cords listing @ UL</p> <p>Link to live Flexible Cord listing @ UL</p> </div> <div> <div> <div>UL, CUL, and PSE approval</div> <div> <div>Contact GlobTek for PSE Certs if needed</div> <div> AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/ </div> </div> </div> <div> RoHS/RoHS3 Declaration https://www.globtek.com/pdf/rohs_cert/01t0c000008jWm6AAE </div> </div> </div> </div>	<div> <div> <div>Cable Approvals</div> <div>   </div> <div> <p>Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, anddf cables total up to a UL approved cordset or cable assembly</p> <p>LINK TO CERTs</p> <p>Link to live Power Cords listing @ UL</p> <p>Link to live Flexible Cord listing @ UL</p> </div> <div> <div> <div>UL, CUL, and PSE approval</div> <div> <div>Contact GlobTek for PSE Certs if needed</div> <div> AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/ </div> </div> </div> <div> RoHS/RoHS3 Declaration https://www.globtek.com/pdf/rohs_cert/01t0c000008jWm6AAE </div> </div> </div> </div>	<div> <div> <div>Connector Approvals</div> <div>   </div> <div> <p>Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, anddf cables total up to a UL approved cordset or cable assembly</p> <p>LINK TO CERTs</p> <p>Link to live Power Cords listing @ UL</p> <p>Link to live Flexible Cord listing @ UL</p> </div> <div> <div> <div>UL, CUL, and PSE approval</div> <div> <div>Contact GlobTek for PSE Certs if needed</div> <div> AGENCY ONLINE DOCUMENTS http://en.globtek.com/cordsets/ </div> </div> </div> <div> RoHS/RoHS3 Declaration https://www.globtek.com/pdf/rohs_cert/01t0c000008jWm6AAE </div> </div> </div> </div>

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Nema 5-15P (Type B) (appr for No Amer and Japan) to IEC320-C13 (appr for No. Amer and Japan), GT Cable #115J: 16 / 1.25mmsq / 3 Conductors, 8.5mm OD, SJT / VCTF, 60 Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: C-UL-US, PSE, 1830 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302J115J6F0701J(R)	Rev C

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:160NA
Description:160 +/- 20mm
Image:

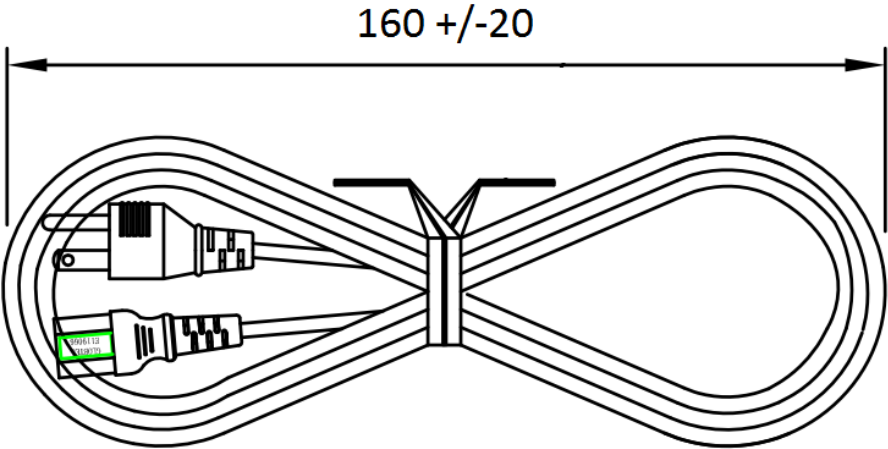

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):