

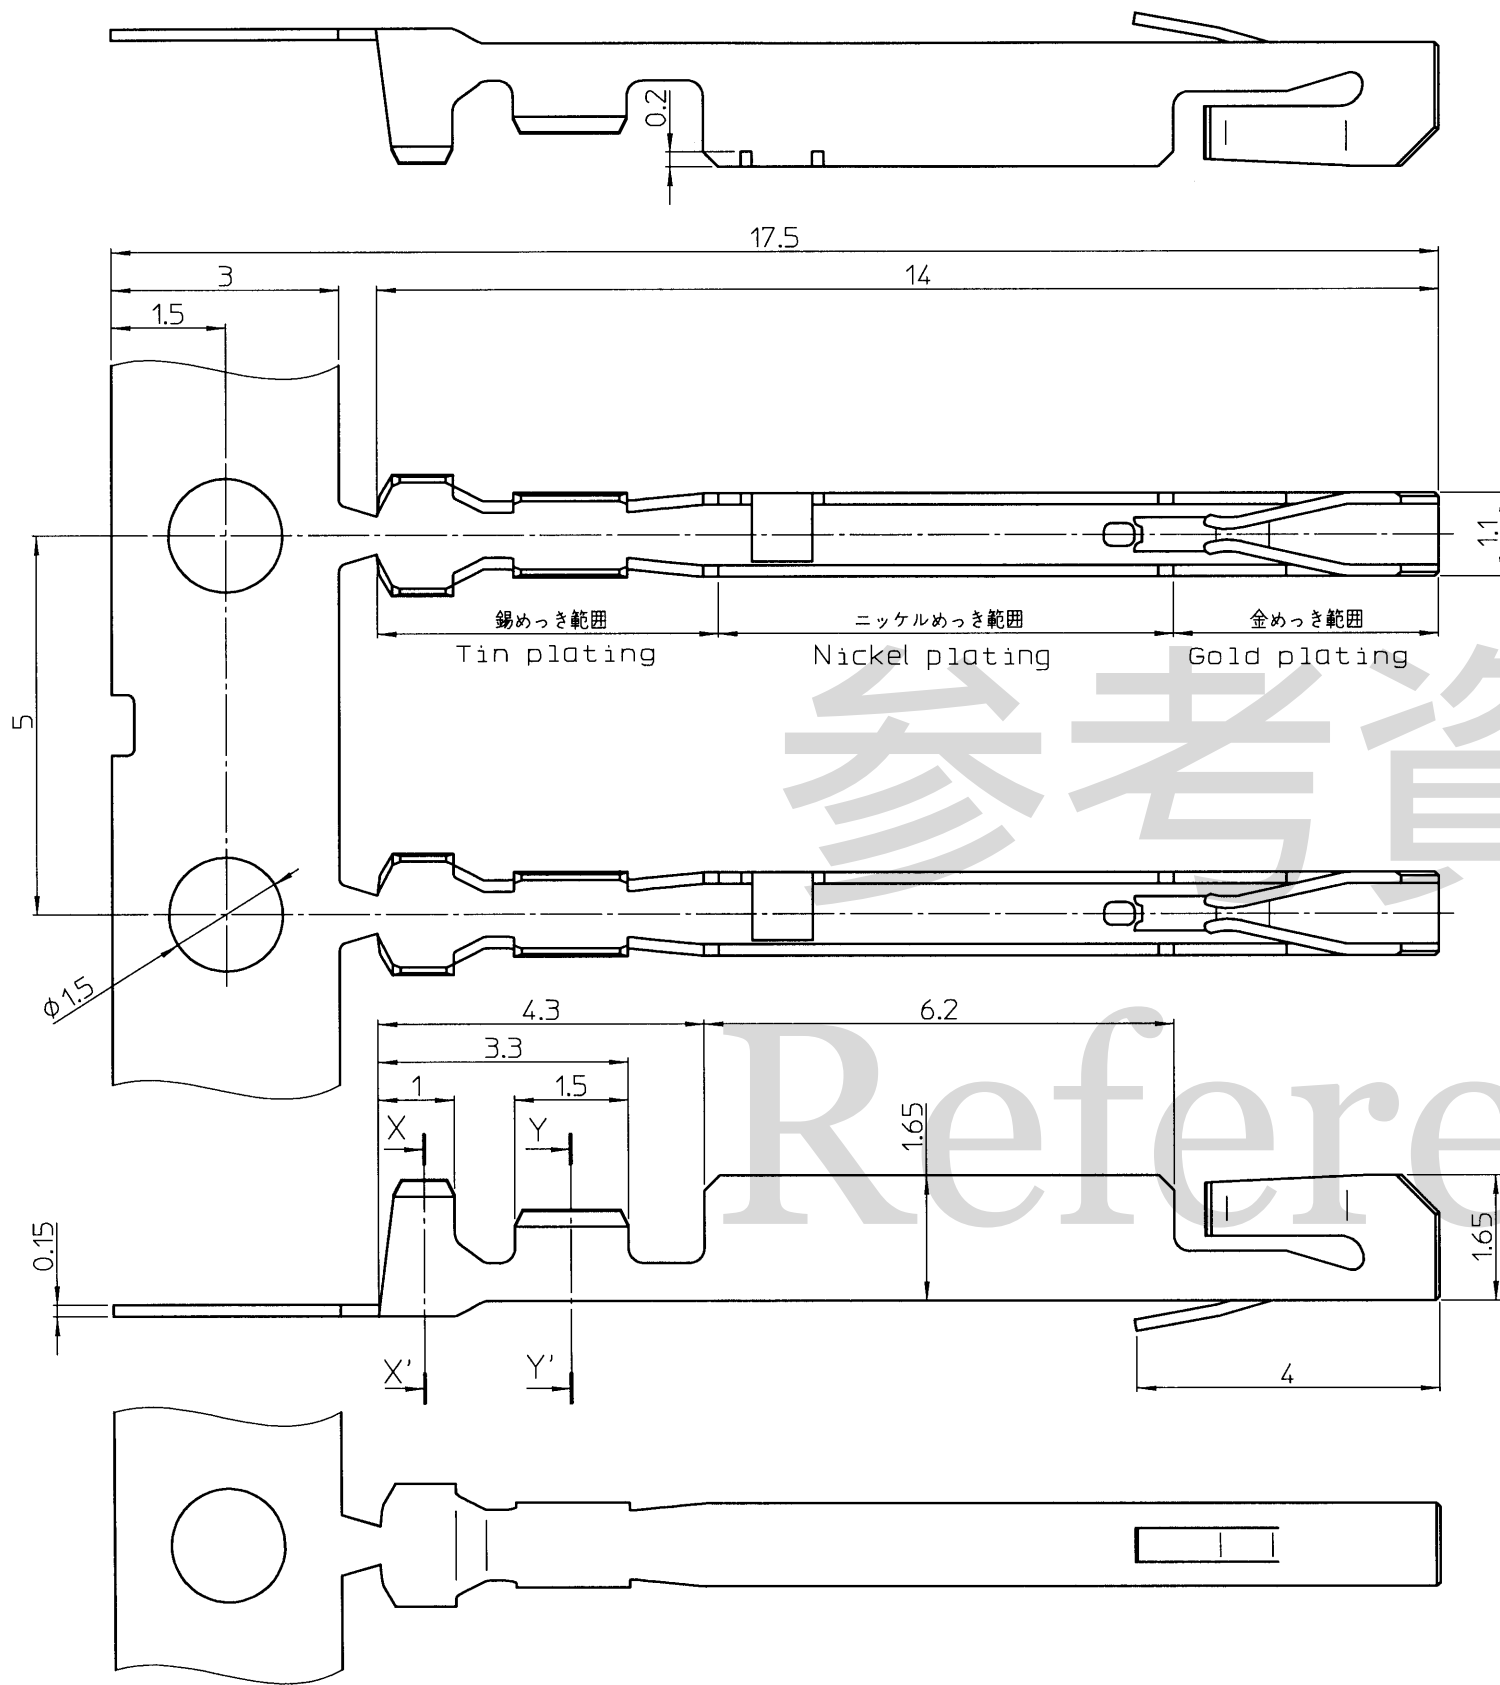


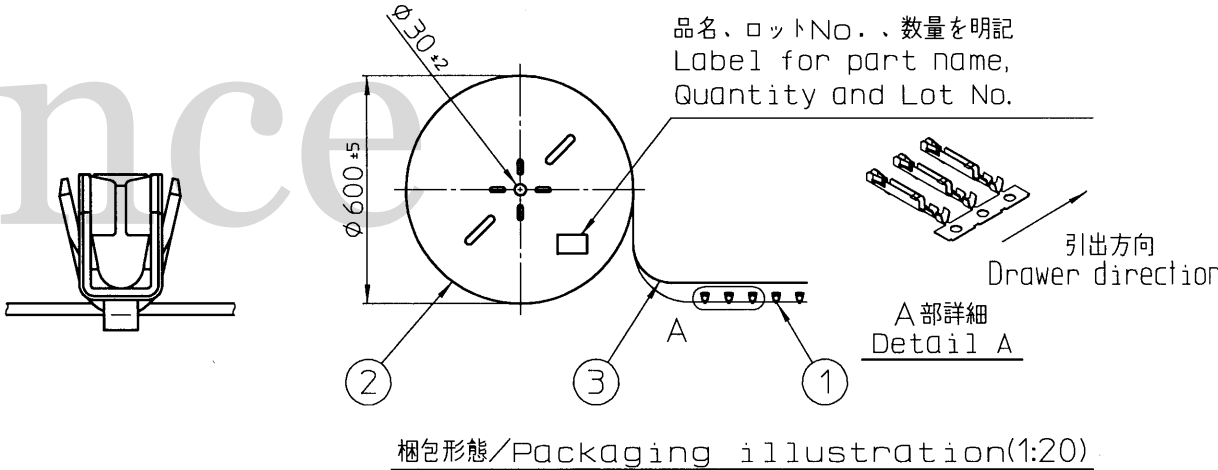

- NOTES
- 指定なき寸法公差/Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上/10 or more ± 0.3
 - #5970仕上/Finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき(SEE NOTE3)/Contact area/Gold plating(SEE NOTE3)
圧着部/錫めっき仕上/Crimp area/Tin plating(1.0 μ m以上/or more)
 - 品名/Part name
#5970
接触部/金めっき
Contact area/Gold plating
無:0.05 μ m以上/None:0.05 μ m or more
D:0.25 μ m以上/:0.25 μ m or more
FAS01用圧着コンタクト/Crimp contact for FAS01
適合ケーブルサイズ/Applicable cable size
AWG26~28(ケーブル被覆外径 ϕ 0.88~1.00)
AWG26~28(Insulation Dia. ϕ 0.88~1.00)
 - アセンブリツール/Assembly tools

圧着アプリケーション/Crimping applicator	圧着ハンドツール
日本オートマチックマシン(株)/Japan Automatic Machine Co., Ltd.	Crimping hand tool
EFS857400	CH-05

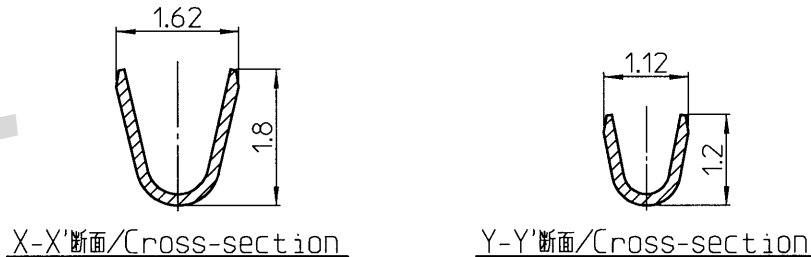

③	層間紙 Sandwich Paper between layers of contact	1	紙 Paper	
②	リール Reel	1	紙 Paper	
①	#5970	10,000	銅合金 Copper alloy	SEE NOTE2
No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish

△ x				
△ x				
Jan.29,2021	n. Sugita	S.Takao	Y.Aoki	ニッケルめっき範囲、背面図、断面追加の為、改版。 Add Nickel plating and Rear view, Cross-section.
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION
THIRD ANGLE PROJECTION	DRAWN BY S.Takao	DATE Jun.25,2013	CHECKED BY K.Tagai	DATE Jun.25,2013
MATERIAL	TITLE			
FINISH	#5970			
KEL CORPORATION				REVISION
DRAWING No. P3C790				3